

### 1. Description

E-MAAX CSR Regulator optimizes alternator output based on;


- System load,
- Battery type
- Battery state of charge.

The battery charging profile is programmed based of battery type for the common batteries (Lead Acid / AGM / Gel / FireFly / Custom-LiFePO<sub>4</sub>) in both 12 and 24 Volt and "P" or "N" alternator configurations. The CSR has two LED's which function as visual status indicators and fault diagnostics. Though the basic CSR system is fully functional, additional peripherals can be purchased to further enhance the charging system.

### 2. Specifications

Parameter	Value	Units
Weight	200	grams
Housing material	PVC	-
Operating range	-20 .. +100	Celsius deg
Protection	IP 56	-
Maximum allowable shock	3	G
Maximum allowable relative humidity	95	%

### 3. Dimensional outline

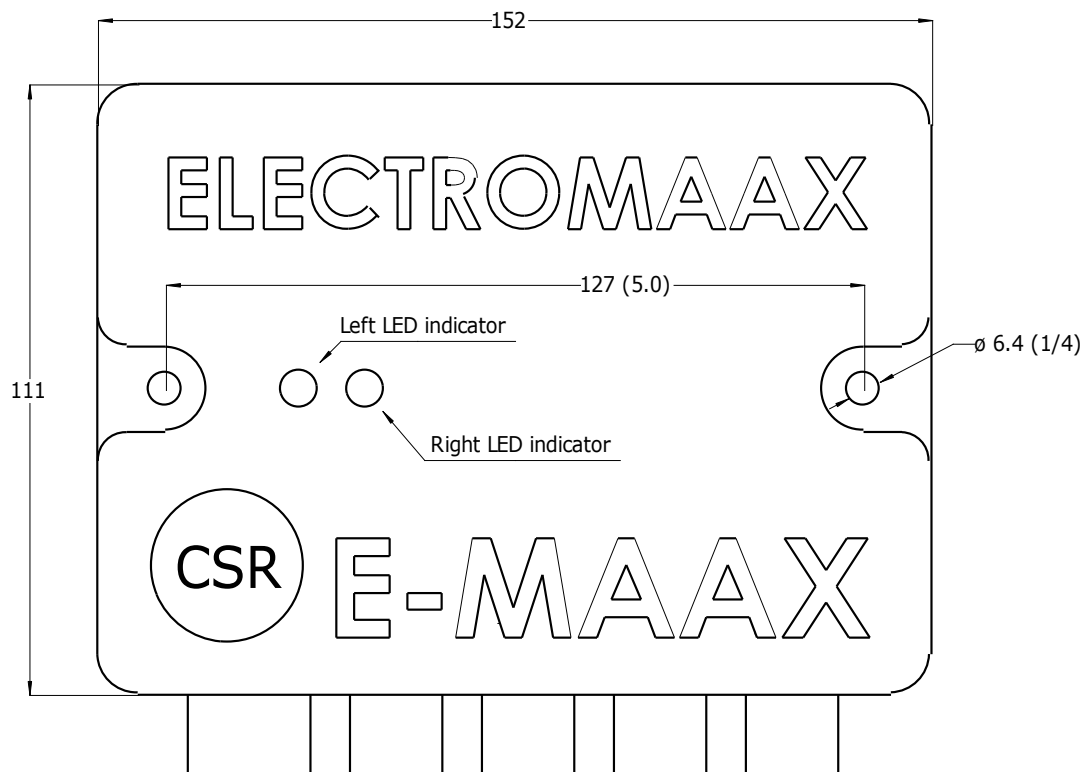


All units are millimeters (inches)

**3. Electrical specifications**

Parameter	Value	Units
DC supply voltage	6-40	Volts
Current consumption	0.030	Amps
Maximum Field current	15	Amps
Power Cable ratings	Gauge: 14 AWG Material: tinned copper strands Insulator Material: PVC Jacket Color: black Diameter: 12 mm	-
Communications format	RS-485	-
Peripherals connector pin functions	1 - black – battery negative 2 - red – DC supply 3 - white – communication lead "A" 4 - yellow – communication lead "B"	-
Power cable connector pin functions	1 - black – battery negative 2 – white – Ignition input 3 – red - battery positive 4 - brown - Field output 5 – not used 6 – not used	-

4-pin and 6-pin connector pins, view from the cable side

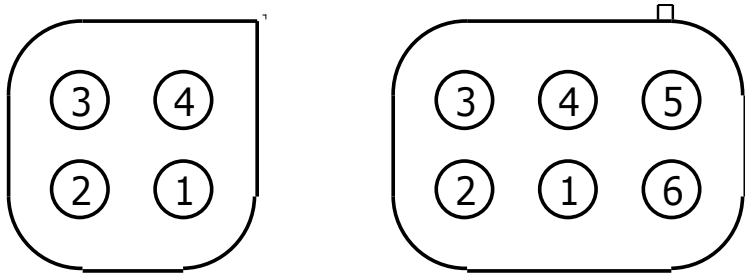




**4. Description of functions**

The CSR regulator provides alternator output by controlling the "Field" input into the alternator. As the Field signal is increased or decreased so the alternator output follows. As the functions of the CSR regulator are described below the terms Field input and Alternator output are interchangeable. The term Field Output refers to Field condition from the Regulator, whereas Field Input is the same value from the Alternator's perspective.








**Visual Indication**

CSR Regulator has two LED indicators.

Left indicator works only when the ignition is inactive and there is no regulation.

Lighting sequence	Meaning
	Regulator is powered up, ignition is switched off. It flashes (ISO) green every 6 seconds.
	Regulator is busy reporting its settings to external PC
	Regulator is busy updating its settings from external PC

Right indicator works only when the ignition is active and there is regulation.

Lighting sequence	Meaning
	<b>Warm-up</b> stage of regulation
	<b>Bulk+Absorb</b> stage of regulation
	<b>Float</b> stage of regulation
	Half Field condition, when regulator allows 50% of the alternator's output
	<i>Critical Fault condition</i> , when regulator allows only 10% of the alternator's output
	<i>Settings Fault condition</i> , where the regulator disables the alternator's output (0%).
	<b>CSR</b> mode of regulation (basic regulation based on system voltage)

**Supported Optional Peripherals:**

CSR Regulator supports any of the following peripherals:

- a) Alternator Temperature Sensor
- b) Battery Temperature Sensor
- c) Com Module

The peripherals can be hot-plugged at any time into any available port without restarting the regulator. The regulator detects the presence of any compatible peripheral and acquires data from it automatically.

**Charging stages and supported chemistries:**

CSR Regulator supports the following battery chemistries, in both 12 and 24 Volts:

- a) Lead-acid
- b) AGM
- c) Gel
- d) Carbon Foam
- e) Lithium

The manufacturer configures the PLUS Regulator for use with a particular battery type.

Upon the activation of the Ignition lead, the PLUS Regulator regulates the battery charge through the following charge profile stages:

- a) Warm-up
- b) Bulk + Absorb
- c) Float

Depending on the charging conditions, such as immediate load requirements and engine speed, the PLUS Regulator switches between the charge profile stages to achieve the optimal charging.

**Field reduction:**

Com Module, when connected to the regulator, allow reduce the regulator's Field Outputs to divert engine power from generating electricity to rotating the propellers if needed. Com Module reduces Field down to 50% of its nominal value for the current charging conditions. Field reduction is indicated by the right LED flashing red once and is re-set automatically when the ignition is switched off.

**Warning condition:**

Warning condition is a special mode of regulation when the Field Outputs are reduced to 50% of their nominal value for the current charging conditions. The regulator is placed into the Warning condition due to one or more of the following conditions:

- a) The battery's temperature reaches 40°C
- b) The alternator's temperature reaches 90°C
- c) The regulator's temperature reaches 60°C

The Warning condition is indicated by the right LED flashing red once per second. Warning condition is re-set automatically when the ignition is switched off.

**Critical Fault condition:**

Critical Fault condition is an alarm mode (right LED flashing red two times quickly) when Field output is restricted to 10% in order to avoid damage to the charging system. The regulator is placed into the Critical Fault condition due to one or more of the following conditions:

- a) The battery's temperature reaches 50°C
- b) The alternator's temperature reaches 100°C
- c) The regulator's temperature reaches 90°C
- d) In-line fuse on the power supply line is blown
- e) Overvoltage

Critical Fault condition does not require restart of the regulator; it is re-set automatically when the fault condition is cleared.

**Settings Fault condition:**

Settings Fault condition is an alarm mode (periodically flashes red three times) when no Field output is supplied to the alternator in order to avoid damage to the charging system. The regulator is placed into the Settings Fault condition due to one or more of the following conditions:

- a) Alternator parameters have not been set in the regulator
- b) The regulator is not configured for the correct system voltage (12 or 24)

To clear the Settings Field condition requires the trigger condition to be eliminated and the restart of the regulator.

**Notice**

ElectroMaax reserves the right to make product modifications or discontinue products without notice. Customers are advised to obtain latest written specifications prior to ordering products. Information provided by ElectroMaax is believed to be accurate at the time of its release. Products sales are subject to the ElectroMaax Terms of Sales in force at the time of order acknowledgment. ElectroMaax products are not designed, authorized, or warranted for use in life support devices and systems, or any other critical applications which may involve death, injury, property or environmental damages. Using ElectroMaax products for any critical application is fully at the risk of the customers and their end users and assigns.