


1546 Retriever DS



SPECIFICATIONS

Overall length	15' (4.6 m)
Beam	70" (178 cm)
Bottom width	46" (117 cm)
Side depth	21" (53 cm)
Transom height	20" (51 cm)
Deadrise	3.5°
Weight (boat only, dry)	500# (227 kg)
Max. weight capacity	875# (398 kg)
Max. people capacity	3
Max. HP capacity	40
Aluminum gauge bottom	.080"
Aluminum gauge sides	.080"
Aluminum gauge transom	.080"

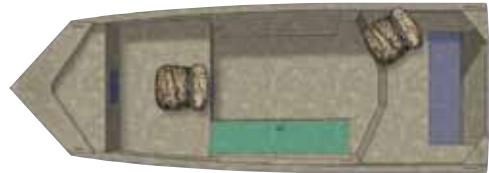

1546 Retriever DS

■ Storage Compartment ■ Rod Storage ■ Livewell

STANDARD COLORS

- › Mossy Oak Shadowgrass with matching "Crest-Liner" interior coating
- › Mossy Oak Break-up with matching "Crest-Liner" interior coating
- › Real-Tree Hardwood with matching "Crest-Liner" interior coating

STANDARD FEATURES

Helm Station

- › 12 volt power outlet
- › Elevated aluminum helm console
- › No feedback steering

Flooring/Seating

- › Aft wing seating with female receiving seat clip
- › 2 Tempress camouflage seats (1 with clip, 1 with pedestal)
- › Gun compartment with rod tubes and topside cushion
- › Crest-Liner" interior coating on floors and platforms

Safety/Security

- › Upright and level floatation
- › Lanyard ignition stop switch

Construction

- › 1-1/4" strakes
- › All-welded aluminum floor, decks, and transom
- › Anchor and navigational lighting
- › Bilge pump, manual
- › Deck cleats - stainless steel (4)
- › Extruded extra strength ribs
- › Level floatation
- › Lock Track extruded gunnels
- › Mod-V 3.5° deadrise
- › Stainless steel bow & stern eyes
- › Wood-free construction
- › Cross and side rib construction
- › Floor and side skins
- › Over-sized center keel
- › Performance wedges

1546 Retriever DS



STANDARD FEATURES

Storage/Convenience

- › Aft platform with lid and open storage
- › Bow deck storage compartment (lockable)
- › Livewell, (starboard) aerated 15 gal.
- › Low bow casting platform
- › Under bow platform storage (lockable)

Trailer

- › Karavan black powder-coated bunk trailer
- › 1,800 lb. capacity trailer (LB-1800-60-ST)

OPTIONS

Colors

- › Camouflage paint backout
- › Crest-Liner" interior coating backout credit

Electronics

- › 6 gauge trolling motor harness for 24 volt motors
- › 8 gauge trolling motor harness for 12 volt motors
- › MotorGuide FW 46FB/42" 12 V
- › MotorGuide FW 75FB/45" 24V
- › Transducer bracket (welded on)

Miscellaneous

- › 15" transom modification
- › Automatic bilge pump (upgrade exchange)
- › Gun compartment delete credit
- › Lock-Track shotgun shell holder
- › Lock-Track tree clamp
- › Seat clip (male)
- › Tempress seat with cushion

TRAILER OPTIONS

- › Exchange carpeted bunk covers for vinyl bunk covers (only on Galvanized Trailer)
- › Spare Silver Tire w/ Powdercoated Bracket
- › Spare Galvanized Tire w/ Galvanized Bracket
- › Upgrade to Galvanized Bunk Trailer
- › Upgrade to Powdercoated Roller Trailer
- › Upgrade to Galvanized Roller Trailer
- › Ratchet tie-downs
- › Trailer backout credit