


**RT135****TRACK LOADERS****GEHL**<sup>®</sup>

<b>Capacities</b>		<b>Metric</b>		<b>Imperial</b>	
Operating Weight		2953 kg		6510.25 lbs	
Operating Capacity at 35% Tipping Load		612 kg		1349.22 lbs	
Operating Capacity At 50% Tipping Load		875 kg		1929.04 lbs	
Tipping capacity		1750 kg		3858.08 lbs	
<b>Weight and dimensions</b>					
Overall Operating Height - Fully Raised	h27	3670 mm		12 ft 0.48 in	
Height to Hinge Pin - Fully Raised	h28	2794 mm		9 ft 2 in	
Dump angle at full height	a5	40 °		40 °	
Overall Height to Top of ROPS	h17	1930 mm		6 ft 3.98 in	
Overall length with bucket	l16	3076 mm		10 ft 1.10 in	
Overall Length without Bucket	l1	2360 mm		7 ft 8.91 in	
Specified Height	h31	771 mm		2 ft 6.35 in	
Reach at Specified Height	r4	1494 mm		4 ft 10.81 in	
Dump angle at specified height	a17	75 °		75 °	
Maximum Rollback Angle at Ground	a13	28 °		28 °	
Carry Position	d5	165 mm		6.49 in	
Maximum Rollback Angle at Carry Position	a14	28 °		28 °	
Digging Position	h32	18 mm		0.70 in	
Angle of Departure with STD Counterweight		28 °		28 °	
Ground clearance	m4	213 mm		8.38 in	
Track gauge	b10	1148 mm		3 ft 9.19 in	
Track Shoe Width	b20	300 mm		11.81 in	
Crawler base	y2	1168 mm		3 ft 9.98 in	
Overall width less bucket	b1	1448 mm		4 ft 9 in	
Bucket Width	e1	1524 mm		5 ft	
Clearance Radius - Front with Bucket		1918 mm		6 ft 3.51 in	
Clearance Circle - Rear	wa1	1440 mm		4 ft 8.69 in	
Track Type / Track Rollers / Roller Type		Rubber / 4 / Steel		Rubber / 4 / Steel	
<b>Performances</b>					
Ground Speed - Single Speed		10 km/h		6.21 mph	
Drawbar Pull/Traction Effort		3248 kg		7160.61 lbs	
Bucket Breakout - Tilt Cylinder		1588 kg		3500.94 lbs	
Bucket Breakout - Lift Cylinder		1692 kg		3730.22 lbs	
<b>Engine</b>					
Engine brand		Yanmar		Yanmar	
Engine model		4TNV88C Tier IV / Stage V		4TNV88C Tier IV / Stage V	
Motor Type		Radial Piston		Radial Piston	
Gross Power (kW) / Gross Power		34.30 kW / 2500 rpm		34.30 kW / 2500 rpm	
Battery		12 V		12 V	
Cold Cranking Amps at Temperature (CCA)		800 A		800 A	
Alternator - Voltage / Ampere		12 V / 100 A		12 V / 100 A	
<b>Hydraulics</b>					
Standard flow - Auxiliary hydraulics		63.60 l/min		63.60 l/min	
<b>Tank capacities</b>					
Oil Pan Capacity		6.40 l		1.69 US gal	
Hydraulic tank capacity		34.80 l		9.19 US gal	
Fuel tank		59.40 l		15.69 US gal	
Displacement / Number of cylinders		2.20 l / 4		0.58 US gal / 4	

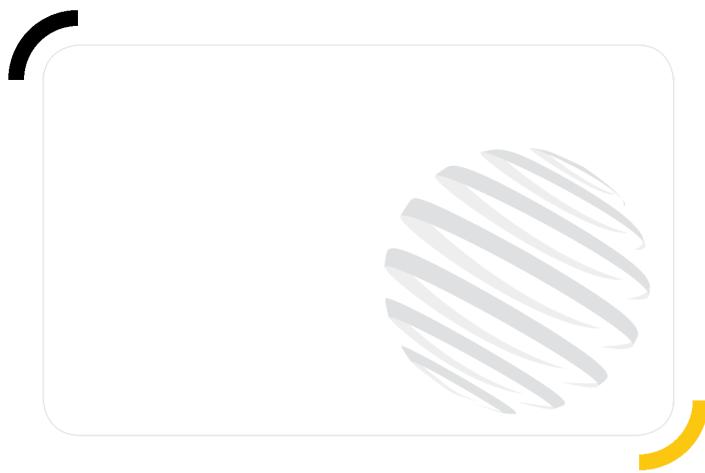

# GEHL®

Siège Social  
P.O. Box 179 - One Gehl Way - West Bend, WI, USA 53095  
Tel: (262) 334-9461 - Fax: (262) 338-7517  
[www.gehl.com](http://www.gehl.com)



This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contradictorial document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend