

MADE IN CANADA



37452 Glen's Hill Road R.R. #2 Auburn, ON N0M 1E0
Ph: 519-529-7212 Fax: 519-529-3277
Email: info@smythwelding.com
www.smythwelding.com

LAND ROLLERS






Model "VS" Series

Smyth "VS" series land rollers incorporate all the necessary design features to make it last for many years to come. Features like 1-1/2" diameter (greaseable) wing pivot pins, (4) extra wide wheel lift bushings, 4" x 4" x 1/4" wall tube frame, 30" x 3/8" wall drum with 5/16" thick reinforced ends, heavy duty industrial hydraulic cylinders, as well as adjustable scrapers are just some of the great advantages of owning a Smyth roller!

Safety features like transport lighting, and our unique auto-wing-latch system, are just some of the items that come standard on Smyth land rollers.



High pressure 4" x 20" hydraulic wing cylinders, with pivot link for float application.

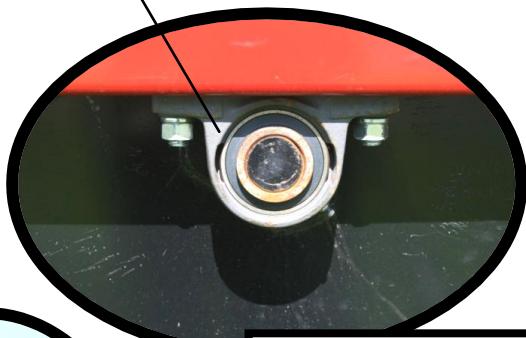

Heavy duty 2" bearings with ductile housing.



High pressure 4" x 10" hydraulic lift cylinder with lock-up for storage.



Available widths: 22' to 34'
Weight per foot: 265 lbs/ft
Transport width: 13' 6"
Transport height: 8' 6" to 14' 2"

Model "XS" Series

Our new one of a kind X-Fold models, come loaded with features not found on other rollers. For example; adjustable scrapers, transport lighting, adjustable tongue and 2" wing pivot pins are all part of the package!

What makes this model so unique is the over-center lift linkage system. There is no need for lock up's on lift or wings. With a 4-wheel mono frame design, there is virtually no tongue weight, which makes it ideal for pulling behind other implements. When folded, the "XS" is extremely maneuverable, which makes backing up and sharp turns a breeze. These rollers are very compact with the tongue folded upright. A 42' roller will sit on a 14' sq. foot print (14' x16' for larger models) for easy storage!



Heavy duty 2"
bearings with ductile
housing.

12' main section for
up to 43' rollers &
44' and up, have
14' main section.



Drums are 30" x 3/8" wall pipe with
5/16 reinforced end plates. (6) 2"
greaseable pins for wing hinge.



Compact X-Fold
design means easy
storage and
maneuverability.

Wing Lift Cylinders:
4" x 54" (30' rollers to 43') &
4-1/2" x 54" (44' rollers & up)

3-1/2" x 27" Raise & Lower
Lift Cylinders



Available widths: 30' to 47'
Weight per foot: 280 lbs/ft
Transport width: 14' (over 44' is 16')
Transport height: 9' 6" to 14'

Over - centering four-bar lift
assembly requires no lock-up's
for transport.

The Benefits Of Land Rollers

Land rollers have always played a key role in most types of farming operations. Now more than ever, farmers are finding more advantages to rolling all types of crops. Not only for firming soils around seed, and to give good seed- to- soil contact, but also to press stones into the ground to protect forage and harvest equipment. Rolling new crops at key times (before or after emergence) can also help retain moisture for better yields in dry conditions. Farmers have also found fall rolling to be extremely beneficial in breaking down heavy stalk crops (eg.corn) over the winter months.

From corn ground, soybeans, wheat, and everything in between. Think Smyth Land Rollers for all your rolling needs!

Distributed By:

Manufactured By:

