



NUTRI-PRO[®] SEMI-MOUNTED

Nutri-Pro[®] Precision implements are semi-mounted with lift assist and designed to work with RTK guidance for precision-placed high-value nutrients. These units integrally mount to the tractor and follow its path, regardless of curves and

contours. By utilizing the same guidance during planting, the seed is placed right where the farmer wants it in relation to the fertilizer, creating the perfect growing environment. These units are available in both liquid and anhydrous models.



NUTRI-PRO® SEMI-MOUNTED MODELS

FEATURES & BENEFITS


Semi-Mounted	Row Spacing	Working Width	Transport Width	Transport Height	Engine H.P. Required	Base Weight
NP2330AA	30"	29' 7"	17' 2"	11' 1"-12' 7"	145+	11,100-13,300
NP2540AA	20", 30"	38' 11"	16' 5"	13' 4"	180+	11,400-16,600
NP2330LL	20", 30"	29' 7"	17' 2"	11' 1"-12' 7"	145+	12,200-14,600
NP2540LL	20", 30"	38' 11"	16' 5"	13' 4"	180+	11,100-13,600
NP2540BL	38", 40"	38' 6"	16' 5"	13' 4"	210+	11,500-13,400

See www.greatplainsag.com for complete specifications.

Specifications are subject to change without prior notification. Images may not depict current or standard production models.

*NH3 Coulters only

SEMI-MOUNTED

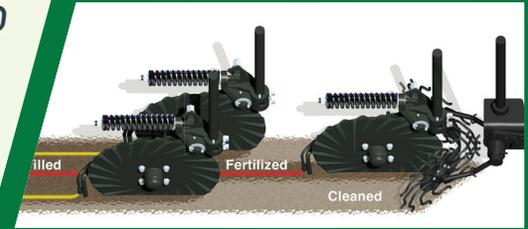

3-COULTER LIQUID FERTILIZER CHOICE

When equipped with a dual Terra-Tine™ Row Cleaner, this 3-coulters system creates a clean, warm, vertically-tilled seedbed while applying liquid fertilizer, ensuring consistent nutrient delivery to every plant and reducing nutrient loss.



NH3 HIGH-SPEED COULTER CHOICE

At speeds of up to 8 mph, the high-speed NH3 coulters apply up to 200 units of nitrogen faster and more efficiently than other methods. Spring-preloaded at 2,100 lbs., the 24" coulters blades penetrate up to 6" deep.

NH3 SPRING SHANKS

Spring shanks are available on 30" row spacings with an optional lead coulters and trailing sealer. Choose from double-disc, notched, or spider wheel sealers.

ADDITIONAL STANDARD FEATURES

- 6" x 4" x 3/8" wall frame tubing
- Emergency water tank (NH3 units only)
- Hitch can be offset for sidedressing
- Jack stand
- Casting gauge wheels
- Hydraulic weight transfer
- Greasebank for coulters
- LED safety lighting



REAR HITCH OPTIONS

Choose either the shiftable rear hitch that allows the toolbar to shift 15" to the side for sidedressing or a Montag® hitch kit (shown) that allows a Montag cart to be pulled behind the Nutri-Pro (cart not supplied).



2-POINT WITH LIFT ASSIST

Casting lift-assist wheels work in conjunction with the 3-point lift arms to help reduce the lifting requirements of the tractor.




OUTER FRONT GAUGE WHEELS

Jack-style, adjustable wing gauge wheels keep wings at the correct depth, even over undulations. Hydraulic weight transfer provides extra down pressure to penetrate hard ground.

OPTIONS (see website for complete list of features & options)



REAR HITCH

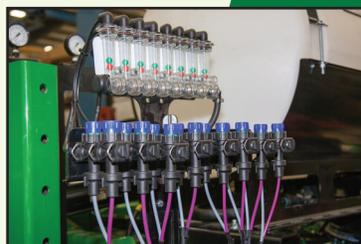

SUREFIRE DELIVERY SYSTEM



TWO 300-GAL. FERTILIZER TANKS



WEIGHT KIT