




TELETRUK | GAS/DIESEL/ELECTRIC
SPECIFICATION



STATIC DIMENSIONS

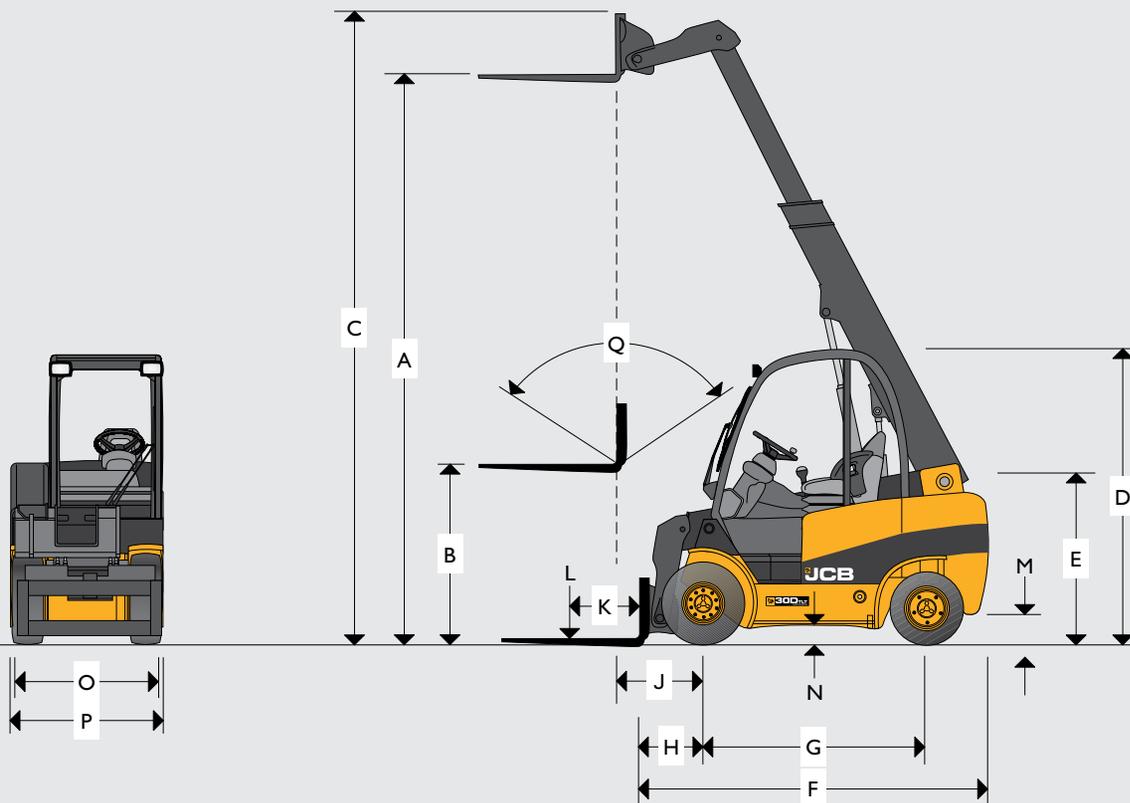


STATIC DIMENSIONS

MODEL		TLT 55-28G	TLT 66-44G	TLT 66-45G	TLT 77-52D	TLT 66-40E
Drive Type		2WD	2WD	4WD	4WD	2WD
Power		LPG	LPG	LPG	DIESEL	ELECTRIC
Type		LOGISTICS	LOGISTICS	LOGISTICS	CONSTRUCTION	LOGISTICS
A	Lift height	ft-in (m) 13-1 (4.0)	13-1 (4.0)	13-1 (4.0)	14-3 (4.35)	13-1 (4.0)
B	Free lift (standard)	ft-in (m) 4-8 (1.4)	4-8 (1.4)	4-8 (1.4)	4-5 (1.35)	5-2 (1.58)
C	Height (boom extended)	ft-in (m) 15-0 (4.58)	15-2 (4.63)	15-2 (4.63)	16-11 (5.15)	15-2 (4.63)
D	Height of overhead guard (standard/low)	ft-in (m) 7-2 (2.19)	7-3 (2.21)	7-3 (2.21)	7-7 (2.3) / 7-3 (2.2)	7-4 (2.25)
E	Height of operator seat	ft-in (m) 3-6 (1.07)	3-6 (1.07)	3-6 (1.07)	4-0 (1.23)	3-6 (1.07)
F	Length to fork face	ft-in (m) 8-7 (2.63)	9-0 (2.75)	9-0 (2.75)	10-6 (3.2)	9-11 (3.0)
G	Wheelbase	ft-in (m) 5-7 (1.7)	5-7 (1.7)	5-7 (1.7)	6-9 (2.05)	5-11 (1.80)
H	Distance from c/l of front axle to fork face	ft-in (m) 1-7 (0.5)	1-8 (0.52)	1-8 (0.52)	2-0 (0.61)	1-8 (0.52)
J	Distance from c/l of front axle to fork face (full height)	ft-in (m) 2-4 (0.7)	2-4 (0.72)	2-4 (0.72)	2-6 (0.76)	2-4 (0.72)
K	Load center	in. (mm) 20 (500)	20 (500)	20 (500)	20 (500)	20 (500)
L	Lift capacity (with side-shift)	lb (kg) 5,500 (2500)	6,600 (3000)	6,600 (3000)	7,700 (3500)	6,600 (3000)
M	Ground clearance (lowest point)	in. (mm) 4.5 (115)	5.1 (130)	5.1 (130)	6.9 (175)	5.6 (143)
N	Ground clearance (wheelbase center)	in. (mm) 5.5 (140)	6.1 (155)	6.1 (155)	6.9 (175)	6.8 (172)
O	Fork carriage width	in. (mm) 43 (1.1)	47 (1.2)	47 (1.2)	47 (1.2)	47 (1.2)
P	Maximum width	ft-in (m) 3-10 (1.18)	4-2 (1.28)	4-2 (1.28)	4-7 (1.4)	4-2 (1.3)
Q	Carriage tilt (total)	degrees 111	111	111	111	111

GENERAL SPECIFICATION


MODEL		TLT 55-28G	TLT 66-44G	TLT 66-45G	TLT 77-52D	TLT 66-40E
Engine manufacturer		KUBOTA	KUBOTA	Kubota	JCB Diesel by Kohler	N/A
Tier compliant						
Engine model		WG2503	WG2503	WG2503	SK12504	N/A
Engine output (gross power)	hp (kW)	58 (43)	58 (43)	58 (43)	62 (46)	N/A
Cubic capacity		2200	2200	2200	2200	2200
Rated RPM		2600	2600	2600	2600	2600
Number of cylinders		4	4	4	4	4
Working pressure attachments	psi (bar)	2,465 (170)	2,465 (170)	2,465 (170)	2,465 (170)	2,465 (170)
Oil flow for attachments (standard / high)	gal/min (l/min)	6 / 15 (28 / 70)	6 / 15 (28 / 70)	6 / 15 (28 / 70)	6 / 15 (28 / 70)	6 / 15 (28 / 70)
Maximum reach ground level	ft-in (m)	7-4 (2.23)	7-4 (2.23)	7-4 (2.23)	7-10 (2.40)	7-4 (2.23)
Maximum reach boom horizontal	ft-in (m)	7-10 (2.39)	7-10 (2.39)	7-10 (2.39)	7-10 (2.40)	9-7 (2.93)
Turning radius	ft-in (m)	8-0 (2.44)	8-2 (2.49)	8-2 (2.49)	11-6 (3.5)	8-4 (2.55)
Aisle width 90 stacking 800x1200/1000x1200	ft-in (m)	12-11 (3.94) / 13-7 (4.14)	13-2 (4.0) / 13-10 (4.21)	13-2 (4.0) / 13-10 (4.21)	16-7 (5.06) / 17-3 (5.26)	13-1 (4.0)
Weight unladen	lb (kg)	9,789 (4440)	10,869 (4930)	10,869 (4930)	12,125 (5500)	11,111 (5040)
Travel speed	mph (kph)	12 (20)	12 (20)	12 (20)	12 (20)	11 (18)
Gradeability unladen	%	16	16	16	23	21
Transmission		Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Electric
Park brake type		Hand	Hand	Hand	Hand	Hand
Shovel rated capacity	cu yd (cu m)	N/A	0.78 (0.60)	0.78 (0.60)	0.78 (0.60)	N/A
Shovel struck capacity	cu yd (cu m)	N/A	0.65 (0.5)	0.65 (0.5)	0.65 (0.5)	N/A
Shovel dump height	ft-in (m)	N/A	7-10 (2.4)	7-10 (2.4)	8-10 (2.68)	N/A
Shovel rollback angle at ground	degree	N/A	37	37	33	N/A
Shovel width	in. (mm)	N/A	55 (1385)	55 (1385)	55 (1385)	N/A
Tires PPS (Semi-solid), P (Pneumatic)		PPS	PPS / P	PPS / P	PPS / P	PPS
Tire size front		7x12	27x10x12	27x10x12	27x10x12	29x10x12
Tire size rear		7x12	23x9x10	23x9x10	27x10x12	21x8x9

LIFT CAPACITIES – TLT55-28G

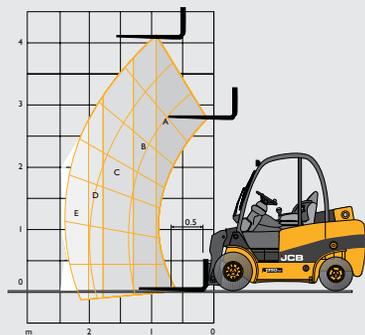


Capacity bands	TLT55-28G
A	5,500 (2495)
B	4,400 (1996)
C	3,300 (1497)
D	2,800 (1270)
E	2,200 (998)
@ 6.56 ft	2,800 (1270)

LIFT CAPACITIES – TLT66-44G

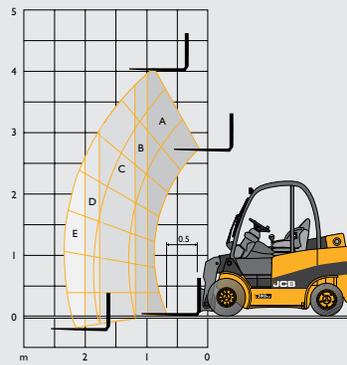


Capacity bands	TLT66-44G
A	6,600 (2994)
B	5,500 (2495)
C	4,400 (1996)
D	3,800 (1724)
E	3,300 (1497)
@ 6.56 ft	3,800 (1724)

LIFT CAPACITIES – TLT 66-45G

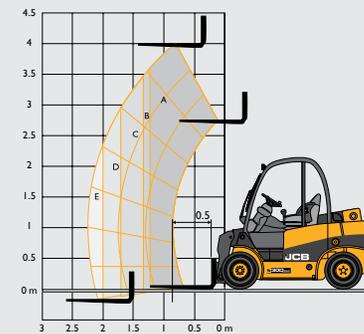


Capacity bands	TLT 66-45G
A	6,600 (2994)
B	6,000 (2721)
C	5,500 (2495)
D	4,400 (1996)
E	3,300 (1497)
@ 6.56 ft	4,400 (1996)

LIFT CAPACITIES – TLT77-52D

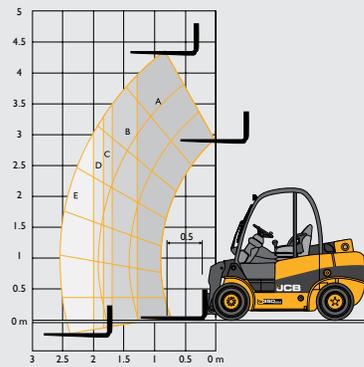

Capacity bands	TLT77-52D
A	7,700 (3493)
B	6,600 (2994)
C	6,000 (2721)
D	5,200 (2359)
E	4,400 (1996)
@ 6.56 ft	5,200 (2359)

LIFT CAPACITIES – TLT66-40E

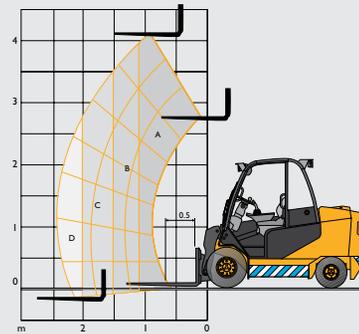

Capacity bands	TLT66-40E
A	6,600 (2994)
B	5,500 (2495)
C	4,100 (1860)
D	3,500 (1588)
@ 6.56 ft	4,100 (1860)



ONE COMPANY, MORE THAN 300 MACHINES.

TELETRUK | GAS/DIESEL/ELECTRIC

Specification

JCB North America

2000 Bamford Blvd., Pooler, Georgia, 31322 Tel: (912) 447-2000

Download the very latest information on this product range at www.jcb.com

JCB inc. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB inc. All references in this publication to operating weights, sizes, capacities and other performance measurements are provided for guidance only and may vary dependant upon the exact specification of machine. They should not therefore be relied upon in relation to suitability for a particular application. Guidance and advice should always be sought from your JCB Dealer. JCB reserves the right to change specifications without notice. Illustrations and specifications shown may include optional equipment and accessories. The JCB logo is a registered trademark of J.C. Bamford Excavators Ltd.

Your nearest JCB Dealer

07/20 DWUSA 5187.2

 JCBNA
  @JCBNA
  JCBNORTHAMERICA
  JCBNA

