

Technical sheet :

# **MLT 845-100 H**


---




Capacities		Metric	Imperial
Max. capacity	Q	4500 kg	9921 lbs
Max. lifting height	h3	7.55 m	24 ft 9 in
Max. outreach	l4	4.57 m	15 ft
Reach at max. height		1.55 m	5 ft 1 in
Breakout force with bucket		6650 daN	6650 daN
Weight and dimensions			
Unladen weight (with forks)		9080 kg	20018 lbs
Ground clearance	m4	0.45 m	1 ft 6 in
Wheelbase	y	2.77 m	9 ft 1 in
Overall length to carriage (with hitch)	l11	5.22 m	17 ft 2 in
Front overhang		1.39 m	4 ft 7 in
Overall width	b1	2.42 m	7 ft 11 in
Overall cab width	b4	0.95 m	3 ft 1 in
Overall height	h17	2.58 m	8 ft 6 in
Tilt-down angle	a5	130 °	130 °
Tilt-up angle	a4	12 °	12 °
External turning radius (over tyres)	Wa1	4.18 m	13 ft 9 in
Standard tyres		Alliance - A580 - 460/70 R24 159A8	Alliance - A580 - 460/70 R24 159A8
Drive wheels (front / rear)		2 / 2	2 / 2
Steering wheels (front / rear)		2 / 2	2 / 2
Performances			
Lifting		10 s	10 s
Lowering		6.5 s	6.5 s
Extension		12 s	12 s
Retraction		9.5 s	9.5 s
Crowd		4 s	4 s
Dump		3 s	3 s
Engine			
Engine brand		Deutz	Deutz
Engine norm		Stage IV	Stage IV
Engine model		TCD 3.6 l	TCD 3.6 l
Number of cylinders - Capacity of cylinders		4 - 3600 cm <sup>3</sup>	4 - 219.69 in <sup>3</sup>
I.C. Engine power rating / Power (kW)		101 Hp / 74.4 kW	101 Hp / 74.4 kW
Max. torque / Engine rotation		410 Nm/m @1600 tr/min	410 Nm/m @1600 tr/min
Drawbar pull (Laden)		8460 daN	8460 daN
Reversible fan		Standard	Standard
Engine cooling system		3 radiators water + intercooler + hydraulic oil	3 radiators water + intercooler + hydraulic oil
Transmission			
Transmission type		Hydrostatic	Hydrostatic
Max. travel speed (may vary according to applicable regulations)		28 km/h	17.4 mph
Differential lock		Limited slip differential on front axle	Limited slip differential on front axle
Parking brake		Automatic negative parking brake	Automatic negative parking brake
Service brake		Oil-immersed multi-discs on front & rear axles	Oil-immersed multi-discs on front & rear axles
Hydraulics			
Hydraulic pump type		Load sensing pump	Load sensing pump
Hydraulic flow - Pressure		150 l/min - 270 Bar	150 l/min - 19 PSI
Flow sharing distributor		Standard	Standard
Tank capacities			
Hydraulic oil		131 l	28.82 gal
Fuel tank		135 l	29.70 gal
Diesel Exhaust fluid (AdBlue® type)		10 l	2.20 gal
Noise and vibration			
Noise at driving position (LpA) tested following NF EN 12053 norm		79 dB(A)	79 dB(A)
Environmental noise (LwA)		103 dB(A)	103 dB(A)
Vibration to whole hand/arm		< 2.50 m/s <sup>2</sup>	< 2.50 m/s <sup>2</sup>
Miscellaneous			
Safety tractor homologation / cab homologation		Cab ROPS - FOPS Level 2	Cab ROPS - FOPS Level 2
Controls		JSM	JSM

# Load chart


Rough terrain load chart (EN 1459 B) Metric

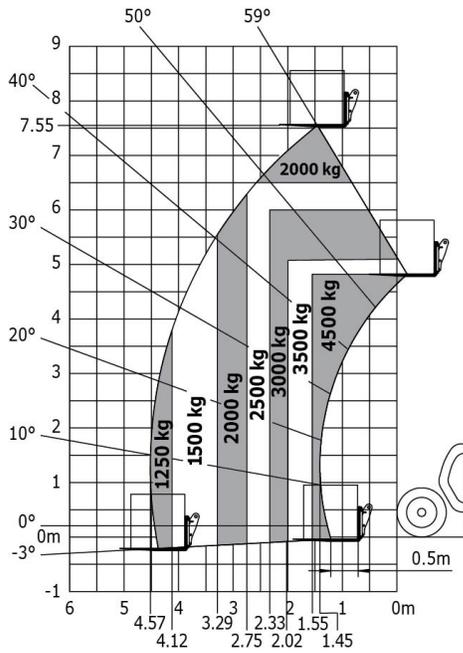

Industrial load chart (EN 1459 A) Imperial

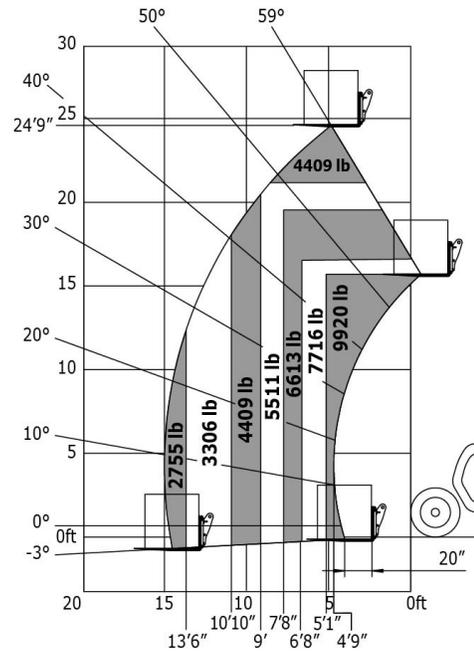

# Dimensional drawing

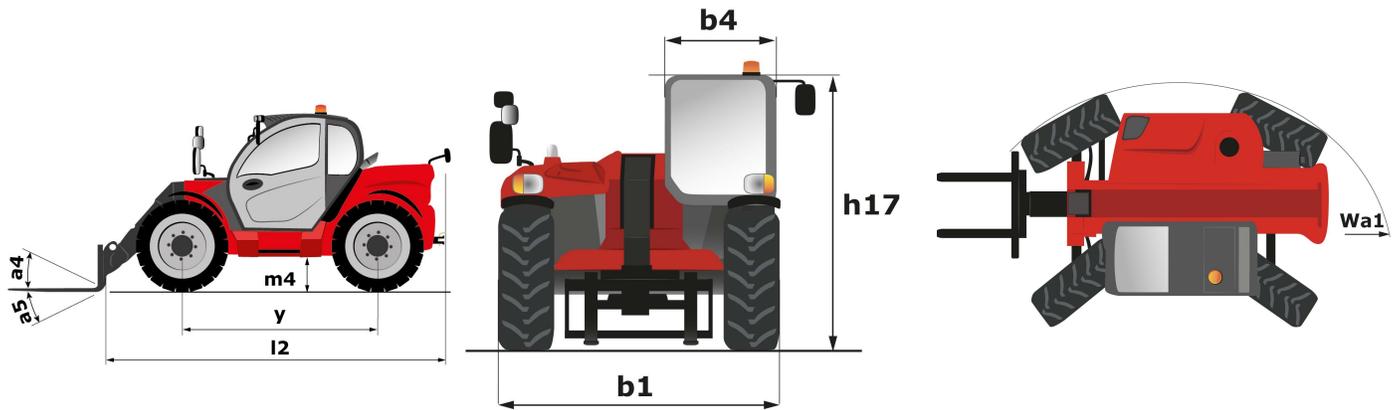



Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508  
RCS Nantes