

CROSS AUGER




- Full length augers to prevent hang ups.
- Compatible with All draper models.
- Swept back center paddles increase flow.
- Angled Stripper Bar to prevent wrapping.

INDUSTRY LEADING FEATURES




PATENTED ANGLED STRIPPER BAR

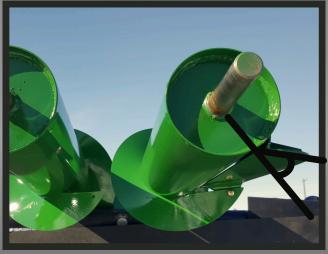


CENTER PADDLES

FLEX-END TECHNOLOGY

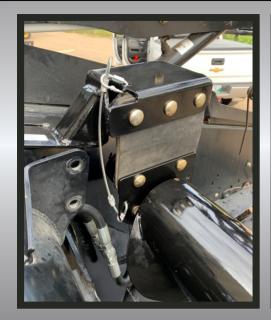



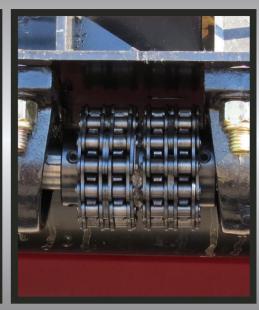

Multi-cord bonded rubber connection allows the auger to seamlessly follow the movement of the header. The double chain flex joint eliminates the need for high wear parts at the center coupler.

INCREASE COMBINE SPEED OVER 50%



Exchange your worn out MacDon cross auger for up to \$3000.00 core credit. Contact us for details.

Harvest MORE Crop FASTER

WWW.AGSHIELD.COM 800-561-0132





LAND ROLLER



- 1, 3, 5 Section models 11 to 70 feet.
- Maintain a smooth & stone free surface.
- Increase seed germination.
- Increase yield & save your combine.



Transport



Diagonal Pull Arm

450 lbs/ft CRUSHING DOWN FORCE



FEATURES & BENEFITS



PASTURE DOCTOR

Seed, pack and level overgrown rodent mounds in a single pass.



WATER FILL KIT

Easily add water to increase crushing down-force.

STANDARD FEATURES:

- 4-way floating HD knuckles with 1 3/4" pins
- Hydraulic floating hitch (minimizes frame stress)
- · Highway rated tires
- HD #213 bearings with 2 1/2" replaceable shafts



LEVELING BLADE

Cut rodent mounds flush and roll sod flat. Faster harvest speeds on smoother fields.



SAVE YOUR COMBINE

Eliminate added expense and downtime caused by rocks in your field.

- · Self-stowing transport safety locks
- Main transport tires act as packers between the outer drums in field position on the 5 section model (Patented design)
- Acre Counter

OPTIONS:

- Patented Leveling Blade (up to 52' wide)
- Water Fill Kit w/ 3" banjo couplings (up to 52' wide)
- Factory Installed Valmar or Tecknic Seed Applicator (up to 52' wide)

Harvest MORE Crop FASTER

WWW.AGSHIELD.COM 800.561.0132

© AgShield MFG 2024



AG SHIELD

HAY CONDITIONER

PAYS FOR ITSELF IN LESS THAN A SEASON!

The Ag Shield Recon is an innovative hay conditioner that significantly cuts hay dry down time (30-60%). The Recon's roller design provides unmatched moisture release with its exclusive crimping frequency and can be outfitted with a mounted tedder and side deflectors for complete control of swath structure and air flow. The Recon hay conditioner gives you more control over harvesting your hay and helps maximize the quality.

STANDARD FEATURES

- Precision-timed & lathed steel rollers
- Quick-Set roller clearance adjustment
- Drive line 115 HP slip clutch
- Crushes stems every other inch

- High field speeds of up to 10 MPH
- Highway rated flotation tires
- High impact side deflectors
- Hydraulically controlled deflectors





Recon 300 - Pull type comes standard with tires and hubs rated for highway speeds for smooth operation in the field and reduced transport time.



Precision timed and lathed rollers combined with hydraulic pressure opens stems fast and efficiently on all types of forage and cereal crops.

Models

Recon 300 - 7ft rolls with 540 PTO Recon 300 - 7ft rolls with 1000 PTO Recon 300 - 9ft rolls with 1000 PTO Recon 400 - 9ft rolls with 1000 PTO



Recon 400 - 3 point hitch has a pivoting body that allows you to angle the machine 25 degrees to combine two swaths to save a raking pass.



Side deflectors invert and move the swath onto dry ground to speed up the drying process and at the same time adjusting swath width to match baler.

Options

Hydraulic drive 7ft Spin Spreader Hydraulic drive 9ft Spin Spreader Side deflector extensions 3 PT quick hitch Category II

CALL US FOR MORE INFO 888.995.2728 www.agshield.com



A AG SHIELD

3 PT ROADSIDE SPRAYER

SAVING DOLLARS, SAFER ROADS

Ag Shield Roadside Sprayers give road maintenance crews cutting edge control while minimizing costs. Road side spraying with grading schedules improves road quality and decreases the number of grader passes. In addition to this, Ag Shield's patented sprayer shield provides the best drift control available for unmatched precision and safety.

STANDARD FEATURES

Patented Shielded Boom 12v DC pump (4-6 GPM at 60 PSI) In-cab sprayer controls 60 gallon tank T-Jet 3 way rollover nozzle bodies (5, 10 & 15 gallon nozzles)
Gauge wheel for boom level
Boom break-away
Chemical inductor







Ag Shield Roadside Sprayers feature a breakaway boom with gauge wheels at the center and outer edge to ensure the boom follows varying terrain. This design ensures that sprayer shield stays in close proximity to the ground, maximizing drift control and safety.



All functions are remotely controlled from the cab by electric solenoids. Premium hand wand & reel (optional).



Ag Shield Roadside Sprayers are designed for easy transport. Simply fold the boom(s), lock into place and drive to the next job site.

Shielded Booms

7 ft 4 nozzle center (Standard)
Options: 5 ft 3 nozzle left
5 ft 3 nozzle right
7 ft 4 nozzle right

Options

End nozzle Fire hose
Camera Eye/hand wash
Rate controller Hand wand

CALL US FOR MORE INFO 800-561-0132 www.agshield.com

© AgShield MFG 2019



A AG SHIELD

TRUCK MOUNT ROADSIDE SPRAYER

SAVING DOLLARS, SAFER ROADS

Ag Shield Roadside Sprayers give road maintenance crews cutting edge control while minimizing costs. Road side spraying with grading schedules improves road quality and decreases the number of grader passes. In addition to this, Ag Shield's patented sprayer shield provides the best drift control available for unmatched precision and safety.

STANDARD FEATURES

Patented Shielded Boom Honda ACE pump In-cab sprayer controls 425 or 510 gal tank T-Jet 3 way rollover nozzle bodies
(Varitarget nozzles)
Gauge wheel for boom level
Boom break-away
Chemical inductor







Ag Shield Roadside Sprayers feature a breakaway boom with gauge wheels at the center and outer edge to ensure the boom follows varying terrain. This design ensures that sprayer shield stays in close proximity to the ground, maximizing drift control and safety.



Optional Microtrak autorate controller provides accurate product application. All functions are remotely controlled from the cab by electric solenoids.



Ag Shield Roadside Sprayers are designed for easy transport. Simply fold the boom(s), lock into place and drive to the next job site.

Shielded Booms

7 ft 4 nozzle center (Standard)
Options: 5 ft 3 nozzle left
5 ft 3 nozzle right
7 ft 4 nozzle right

Options

End nozzle
Camera
Fire hose
Eye/hand wash
Rate controller
Hand wand
LED Beacon
2nd Product tank

CALL US FOR MORE INFO 800.561.0132 www.agshield.com










WHO SAID THE EARTH CAN'T BE FLAT?

- Contour land fast and efficiently
- Maximum width of 8.65 meters (28 ft)
- Infinite blade adjustments 12ft-28ft
- Auto grade and slope control ready
- 12 ft transport width for safe & efficient transportation

BEST OF BOTH WORLDS!







Continuous earth moving

FEATURES & BENEFITS













STANDARD FEATURES:

- Hardened cutting edges
- Standard construction grade ripper tip & end bits (D7, D9 & D11 Dozer)
- Industrial cylinders (Bolt on glands & induction hardened rods)
- Bull pull hitch Cat 4 or Cat 5
- Radial flotation tires
- LED clearance, marker, stop & turn lights
- Height and tilt indicator

OPTIONAL FEATURES:

- Electrical over Hydraulic valves or multipliers
- Scraper Hitch
- Auto slope & tilt control by SD Drain
- RTK & Laser guidance systems
 - SD Drain
 - Trimble
 - Ditch Assist







Right Tilt 12' Transport width

Harvest MORE Crop FASTER


WWW.AGSHIELD.COM 800-561-0132

© AgShield MFG 2024





PRODUCT CATALOGUE

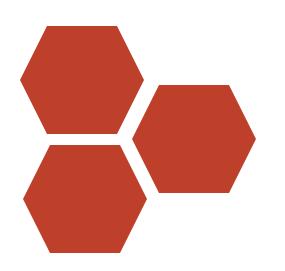



FEB 2025

CONTENTS

Fixed Frame Packer	3
Superflex Packer	4
Superflex-Magnum Series Packer	6
Lawn Rollers	8
Single Gang Drum Rollers	9
Vertical Fold Drum Rollers	10
Municipal Park Roller	11
FW8800 Forestry Winch	12
Liquid Fertilizer Applicator	13
Multi-Purpose Grapple	15
Top Soil Screener	16
Post Drivers	17

Big Jim Products are proudly designed and manufactured in-house for the past 20 years.



5808 Highway 9 Harriston, Ontario N0G 1Z0

Ph: 519-338-2923 • Fax: 519-338-2756

sales@harcoag.ca



FIXED FRAME PACKER



Match tillage or planting equipment with adjustable frame width ranging 9' to 15', and rigid frame on 3' to 6' and 16' models. Big Jim Packers are available in Red, Green, Blue & Orange frame colours. They are available in a colour of your choice to match the other equipment on your farm. Big Jim wheels are designed with heavy hubs and spokes, up to 12% heavier than competitive units.

1 ¾" grade C1045 cold rolled gang shafts, greasable flangette style bearings and heavy-duty ductile iron end

clamps.

Wheel Options:

- 15" Smooth/Sprocket combination, Ductile Iron suited for clay based soils.
- 18" Smooth/Sprocket combination, Ductile Iron suited for clay based soils.
- 19" Notched wheel, Ductile Iron suited for loamier soils.
- 20" Crow Foot, Ductile Iron suited for sandy soils. ¬

Ductile wheels carry a 3-year limited warranty.

The Optional Transport Package is available in single or dual wheel versions and include:

- Complete hydraulic package with 3000 PSI Cylinders
- DOT tagged safety chain
- 5000 lb tongue jack
- 4000 lb hub assemblies
- 15" rims



Tongue Jack Safety Chain



Cylinder Lock



Shown with Dual Wheel Transport Kit



Made in Canada Fabrique au Canada

Sold & serviced by:



Harco Ag Equipment Harriston, Ontario

Ph: 519-338-2923 • Fax: 519-338-2756

Email: sales@harcoag.ca

www.harcoag.ca



SUPERFLEX PACKER





Flex packers are available in a 3-section configuration for widths of 21' to 32' (shown on left). Packers 33' to 50' are built on a 5-section frame (shown right). The balanced frame design minimizes tongue weight.

Each wing gang is independently suspended in the middle allowing **MAXIMUM FLEXIBILITY** on contoured ground. This feature also assures even weight distribution.



Standard Equipment:

- Complete hydraulic package 3000 PSI Cylinders
- Forged Adjustable Pintle/Clevis Hitch
- 7000lb drop leg tongue jack
- DOT tagged safety chains
- Tail and turn signal light package
- Dual 11L-15 8-ply tires 21-40 ft 12 ply on 41-50ft models
- Greasable flange style bearings
- Main frame material 6" x 6" x 1/4" wall tube
- Wing material 6" x 4" x 1/4" wall tube
- Pivot pins and gang shafts 1 ¾" C.R. (C1045)

Big Jim Flex Wing packers are available with 18" Smooth / Sprocket combination Ductile, 19" notched Ductile or 20" Crowfoot Ductile Wheels. Ductile Wheels carry a 3-year limited warranty.

Available in Red, Green, Blue & Orange frame colours.

Working	Transport	Transport	Overall	Appro	ximate Weigl	nt (lbs)
Width	Width	Height	Length	18"	19"	20"
21'	12'-8"	10'	212"	6624	5994	5150
22'	12'-8"	10'-6"	212"	6772	6202	5289
23'	12'-8"	11'	212"	7020	6330	5427
24'	12'-8"	11'-6"	212"	7168	6538	5565
25'	12'-8"	12'	212"	7416	6666	5703
26'	12'-8"	12'-6"	272"	7776	6874	6043
27'	12'-8"	13'	272"	8024	7002	6181
28'	14'-8"	12'-6"	272"	8172	7210	6319
29'	14'-8"	13'	272"	8420	7338	6457
30'	16'-8"	12'-6"	272"	8648	7626	6675
31'	16'-8"	13'	272"	8896	7754	6813
32'	16'-8"	13'-6"	272"	9044	7962	6951
33'	14'-8"	10'-9"	272"	9544	8564	7614
34'	14'-8"	10'-9"	272"	9692	8772	7752
35'	14'-8"	11'-3"	320"	9940	8900	7890
36'	14'-8"	11'-3"	320"	10188	9108	8028
37'	14'-8"	11'-9"	320"	10336	9236	8166
38'	14'-8"	11'-9"	320"	10584	9444	8304
39'	14'-8"	12'-3"	320"	10732	9572	8442
40'	14'-8"	12'-3"	320"	10980	9780	8580
42'	14'-8"	12'-9"	320"	11270	10040	8740
45'	16'-8"	13'-3"	392"	Soo Moss	um Carias	9020
48'	16'-8"	13'-9"	392"	See Magnum Series 9470		9470
50'	16'-8"	14'-3"	392"	Specs 9770		9770





Distributed in Canada by:

Harco Ag Equipment Harriston, Ontario

Ph: 519-338-2923 • Fax: 519-338-2756

Email: sales@harcoag.ca

www.harcoag.ca





SUPERFLEX MAGNUM SERIES PACKER



The Superflex concept has proven to be the most revolutionary design in packers for years. The independent floating design lets each section follow the contour of the soil giving more effective wheel to soil contact. The design also allows each section to independently float over obstacles such as stones without placing excessive weight on the gang causing wheel, shaft or bearing damage.

Construction of the "Magnum Series" allows us to produce 40 to 50 foot packers with 19" wheels and scrapers and still maintain sufficient capacity to incorporate heavier larger diameter wheels in the future should the demand arise.

Standard Features:

- Forged Pintle / Clevis Adjustable Hitch
- 7000lb Tongue Jack
- Grade 70 20,000 lb 3/8" DOT approved for agricultural use safety chains x 2
- Tandem 4" x 24" Inner Wing Cylinders
- Tandem 3 ½" x 24" Outer Wing Cylinders
- 2 LED Road Light Boxes
- 14/7 Heavy Jacket Wiring
- 7 Pin Aluminum Light Plug
- Reflective Tape

Options

- 18" Ductile Smooth Sprocket Combination Wheel
- 19" Ductile Notched Wheel
- Scrapers for 19" Notched Wheels
- 20" Ductile Crowfoot Wheels

Ductile Wheels carry a 3 year limited warranty.



All plumbing neatly arranged and tied in place



Rugged 1 ¾" hinge pins, securely fastened



3 beam outerwing section w/ two cylinders, each packer gang oscillates on centre pin and plastic wear plates



Adjustable clevis hitch, safety chains, 7000 lb tongue jack, steel hydraulic lines



5 bearing main frame section, lights & reflectors standard



Rugged 4 beam main with section with two cylinders

Specifications

-	
Transport Height	15' (50' Model)
Transport Width	16' 8" (all)
Total Weight (46' w/ 19" Wheels)	15058 lbs
Drawbar Weight (Transport Position)	1100 lbs (46' Model)
Tongue Material	7" x 5" x 3/8" Wall
Tongue Brace Material	3" x 3" x 1/4" Wall
Main Frame Material	6" x 6" x 3/8" Wall
Inner Wing Front Tubes (2)	6" x 4" x 3/8" Wall
Inner Wing Rear Tubes (2)	6" x 4" x ¼" Wall
Outer Wing Tubes	6" x 4" x ¼" Wall
Wheel Gang Tubes	6" x 4" x ¼" Wall
Pivot Pins and Gang Shafts	1 ¾" C.R. (C1045)
Tires (4)	11L-15 12-Ply
Wheels (4)	6 Bolt Solid Centre
Hubs (4)	6 Bolt 5000 lb
Gang Shaft Bearings	1 ¾" NTN Triple Seal
Hydraulic Cylinders	3000 PSI (CDN Made)
Hydraulic Connections	JIC and ORB
	-

Distributed in Canada by:

Harco Ag Equipment Harriston, Ontario

Ph: 519-338-2923 • Fax: 519-338-2756

Email: sales@harcoag.ca

www.harcoag.ca

1

Made in Canada Fabrique au Canada



LAWN ROLLERS

The new Big Jim lawn roller is a natural extension of the field roller currently manufactured in Harriston, Ontario! The same ruggedness is built right in.

The roller is offered in **4**', **5**' and **6**' sizes. They are a heavy-duty design. An Extra Heavy-Duty version is available with sizes up to **8**'.

The dry weight of these rollers is serious!



	Heavy Duty
4'	606 lbs
5'	733 lbs
6'	864 lbs
7'	
8'	

720 lbs 857 lbs 998 lbs 1135 lbs 1272 lbs

Additional weight can be achieved by filling the drum with water. This will add up to **290** lbs per foot.



The drum is made from tubular steel 30" in diameter and 3/8" thick. The end plates are 10-gauge steel with 1" bearing on the standard roller. The Extra Heavy-Duty version uses $\frac{1}{4}$ " steel with 1 $\frac{3}{4}$ " pillow block bearings.



The **Extra Heavy-Duty** frame is made of 2" square tubing that is 3/16" thick. It has mitered corners and surrounds the drum for added strength.

The drum is painted black, and the frame is available in a variety of colours to match your tractor.



A standard hitch clevis is used.



Made in Canada Fabrique au Canada

Distributed in Canada by:

Harco Ag Equipment Harriston, Ontario

Ph: 519-338-2923 • Fax: 519-338-2756

Email: sales@harcoag.ca

www.harcoag.ca

8



SINGLE GANG DRUM ROLLERS









Single Gang Features:

- 30" Diameter x 3/8" Wall Drum
- 4" x 3" x 3/16" Wall Tongue
- 4" x 4" x ½" Wall Main Frame
- ¼" Thick Inner End Plates
- 3/8" Thick Outer End Plates
- 1 ¾" Drum Shafts
- 1 ¾" Greasable Bearings
- Drum Scrapers
- Models from 9'-6" to 16'-6"

*Available in Red, Green, Blue & Orange Frames

Distributed in Canada by:

Harco Ag Equipment Harriston, Ontario

Ph: 519-338-2923 • Fax: 519-338-2756

Email: sales@harcoag.ca

www.harcoag.ca

Single or Dual Transport Kits Include:

- 5000 lb Tongue Jack
- Complete Hydraulic Package
- 3000 PSI Hydraulic Cylinders
- 11,000 lb Safety Chain
- Rims
- Tires Optional





VERTICAL FOLD DRUM ROLLERS









Standard Features:

- 30" Diameter x 3/8" Wall Drum
- 3/8" Thick Inner End Plates
- ½" Thick Outer End Plates
- 2-7/16" Drum Shafts
- 2-7/17" Greaseable Ductile Pillow Block Bearings
- 6" x 6" x ½" Wall Main Frame
- 6" x 4" x 3/8" Wall Tongue
- 6" x 4" x ¼" Wall Wing Frames
- Height Adjustable Pintle / Clevis Hitch
- 7000 lb Drop Leg Tongue Jack
- Double Safety Chains 21000 lbs each
- Dual Wheels w/ 11L-15 8-Ply Tubed Tires
- 3000 PSI Hydraulic Cylinders
- Drum Scrapers
- Implement Safety Lights & Reflectors
- Balanced Frame Design for minimum torque weight
- Models from 20'-6" to 34'-6"

Available in Red, Green, Blue & Orange Frames





MUNICIPAL PARK ROLLERS



Approximate Weights (7' Model)

Roller (Dry) 1637 lbs Light Package 20 lbs Single Wheel Transport Kit 390 lbs Dual Wheel Transport Kit 470 lbs

Standard Features

- 4" x 4" x 1/4" Wall Main Frame
- 4" x 3" x ¼" Wall x 6' Long Tongue
- Non-adjustable Clevis Style Hitch
- Reflective Safety Tape on Outer Front and Rear Corners

Options

 4 Lamp Stop/Turn Tail Light Package with 7-pin Round Plug (Agricultural Wire Schematic)

30" x 3/8" Wall Roller Tube

1/4" Thick Roller End Plates

1 3/4" Roller Centre Shaft

1 3/4" Greaseable Bearings Ballast Fill and Vent Plugs

Adjustable Drum Scraper

- Various Tire Options
- Swivel Clevis Hitch

Single or Dual Wheel Transport Kits Include:

- DOT approved 11,000 lb Safety Chain
- Tongue Jack
- Hydraulic Cylinders
- Hoses & Quick Couplers
- Cylinder Transport Locks
- 4000 lb Hubs and Spindles
- 15" x 6 Bolt Agricultural Wheels
- SMV Sign



Sold & serviced by:

Distributed in Canada by:

Harco Ag Equipment Harriston, Ontario

Ph: 519-338-2923 • Fax: 519-338-2756

Email: sales@harcoag.ca

www.harcoag.ca




FW8800 FORESTRY WINCH



Features:

- 1 ½" Diameter Drum Shaft
- Single Nut Clutch Adjustment
- 7/16" Diameter Cable
- Upper Support on top pulley allows easier pulley swivel
- Removable front shaft support
- Single upper and lower safety shields allow quick and easy access to complete drive
- #50 Chain Drive
- Adjustable Idler Sprocket
- #4 PTO Shaft

- 3/8" Thick Blade with Chain Slots
- 8800 lb Pulling Force (at first wrap of drum)
- Upper Pulley Bearings Sealed One Side and Greaseable
- Lower Pulley has Greaseable Bushing
- Twin Storage Stands
- 40 to 80 HP Tractor Range
- Choker Chain Storage Boxes on Both Sides
- Optional Safety Screen



Sold & serviced by:

Distributed in Canada by:

Harco Ag Equipment Harriston, Ontario

Ph: 519-338-2923 • Fax: 519-338-2756

Email: sales@harcoag.ca

www.harcoag.ca



LIQUID FERTILIZER APPLICATOR





Features:

- Tubular Steel Frame Construction
- Convertible Hitch Clevis
- Transverse Mounted Tank
- LED Implement Lights
- Tire-to-Tire Pump Drive
- 2" Bottom Fill Plumbing
- Rockshaft Lift System
- Safety Chain
- 12/4 x 24 Tires
- Blu-Jet® Coulters
- John Blue Piston Pump
- 300 or 500 Gallon Tank Capacity
- Knife or Stream Injection
- Fixed 60" or 90" Axles
- Adjustable Axle or 60"-90"



To build a Big Jim Liquid Fertilizer Applicator, Select One Item from Each Section:

Section 1	
Model	Description
BJLA00100	Base Unit

Section 2	
Model	Description
BJLA00105	300 Gallon Tank
BJLA00106	500 Gallon Tank

Section 3		
Model	Description	
BJLA00102	60" Fixed Axle	
BJLA00104	80" Fixed Axle	
BJLA00111	90" Fixed Axle	
BJLA00103	60"-90" Adjustable Axle	

Section 4	
Model	Description
BJLA00107	5R30 Fixed Tool Bar
BJLA00110	7R30 Fixed Tool Bar
BJLA00108	5R30 Folding Tool Bar
BJLA00109	7R30 Folding Tool Bar

For Different Row Spacing Configurations contact Harco Ag

Section 5	
Model	Description
LA0134	Coulter / Stream Injection
LA0133	Coulter / Knife Injection

Section 6	
Model	Description
BJLA00101	Single Piston Pump, Drive, Plumbing
BJLA00112	Double Piston Pump, Drive, Plumbing


Distributed in Canada by:

Harco Ag Equipment Harriston, Ontario

Ph: 519-338-2923 • Fax: 519-338-2756

Email: sales@harcoag.ca

www.harcoag.ca





Big im MULTIPURPOSE GRAPPLE



Quick Change Claw Options:





- Brush Raking or Piling
- Log lifting, Piling or Loading
- Orchard Pruning, etc.
- Round and Square Bale Grabbing
- Moving Loose Hay and Straw
- Moving Scrap Metal and **Tires**
- Bind and Dirt-Free Trimming and Blocking of Tree Tops

The Big Jim Multipurpose Grapple is available with Frey, Alo and Skid Steer quick attach brackets and universal pin brackets (1" diameter pin). The Grapple consists of 3/4" thick x 5" deep teeth. Teeth are tied together with 1 3/4" and 1" diameter round bar and reinforced with 4" x 2" x 1/4" wall tubing on back side of grapple. Teeth are spaced 12" centres to allow dirt to pass through, but still pick up branches, roots, and many other objects. Several different claw options are available to suit the customers' specific requirements.



Logs & Slabs



Bales



Scrap



Brush

Made in Canada Fabrique au Canada

Sold & serviced by:

Distributed in Canada by:

Harco Ag Equipment Harriston, Ontario

Ph: 519-338-2923 • Fax: 519-338-2756

Email: sales@harcoag.ca

www.harcoag.ca



TOP SOIL SCREENER



Dimensions:

- > Depth 5 foot (6' 4" with loading forks.)
- ➤ Height to top of screen approximately 6' (varies with spring adjustments.)
- ➤ Width 9' inside, approximately 9' 7" outside.
- Mound height of screened material approximately 4'.
- ➤ Back wall of screener is 39"
- > Option: 16" flat belt skirt on screener discharge.



Fast, convenient moving, insert loader bucket into twin forks on discharge side. Also twin loops for chain lifting at approximate balance point.

Oli vibrator 110V standard, purchaser to complete electrical wiring for their requirements and local codes. Can be operated with 110 extension cord, generator or inverter.





Vibrator frame and tension springs mounted in rubber blocks. Tension springs have six adjustments to set angle of screen and tension on the screen assembly.

Screen hinge pins mounted in rubber blocks, use of isolating rubber mounts reduces vibration loss through mainframe keeping as much vibration on the screen area as possible.





Screen with $\frac{3}{4}$ " openings has two center flat bar hold-downs and two angle iron hold-downs on each side to prevent run-off. Screenings drop into ample holding area approximately 9 feet wide x 4 feet high for easy access with buckets up to 8 feet wide.

Distributed in Canada by: Harco Ag Equipment Harriston, Ontario

Ph: 519-338-2923 • Fax: 519-338-2756

Email: sales@harcoag.ca

www.harcoag.ca







Proudly Made in Canada

Features & Benefits

- The Mast tilts in and out and forward and back for post leveling on uneven ground
- The Mast travels out 16 inches and the tongue travels out 24 inches. This enables the operator to accurately place posts without moving the entire machine.
- The Mast lifts hydraulically 24 inches. This allows a fast change from 8 to 10 foot posts. This feature also allows a longer hammer stroke for starting 8 foot posts.
- The Hammer and Mast in fully raised position reaches a height of 11' 6" from the hammer to the ground.
- The BJ740-T and BJ740-T Plus model can be ordered with an optional round/square combination hugger. Both the round and square hugger are made of steel. The hugger swings out of the way for working on existing fence lines.

All Big Jim Post Drivers come with built in safety features to prevent injury in the event of a sudden hydraulic failure.
All units come complete with a DOT approved safety chain on tongue.



Specifications

Model	BJ740- 3PH/SS	BJ740-T	BJ740-T PLUS
Hammer Weight	740 lbs.	740 lbs.	740 lbs.
Counter Weight	N/A	979 lbs.	1,306 lbs.
Total Weight	1,697 lbs.	3,748 lbs.	4,440 lbs.
Hammer Maximum Height Lower Mount	9' 6"	9' 6"	9' 6" – 11' 6"
Hammer Maximum Height Upper Mount	11' 6"	11' 6"	11' 6" – 13' 6"
Hammer Minimum Height Lower Mount	4' 2"	4' 2"	4' 2" – 6' 2"
Hammer Minimum Height Upper Mount	6' 2"	6' 2"	6' 2" - 8' 2"
Hammer Stroke	64"	64"	64"
Overall Width	42"	96"	100"
Overall Length	48"	118"	118"
Transport Height	100"	100"	104"
Mast Tilt Forward/Backward	18°	18°	18°
Mass Tilt In/Out	12°	12°	12°
Mast Vertical Lift	N/A	N/A	24"
Mast Horizontal Travel	N/A	16"	16"
Tongue Travel	N/A	16"	24"
Tires	N/A	9.5L-15 8PR	9.5L-15 8PR
Wheels	N/A	6 Bolt Ag	6 Bolt Ag
Spindles and Hubs	N/A	5000 lb.	5000 lb.
Reservoir	N/A	15 Gallon	15 Gallon
Drive System	N/A	13HP Honda	13HP Honda
Frame	6" x 3" ¼"	6" x 3" 1/4"	6" x 3" x ¼"
Max Post Hugger Diameter	8"	8"	8"

Distributed in Canada by:

Harco Ag Equipment Harriston, Ontario

Ph: 519-338-2923 • Fax: 519-338-2756

Email: sales@harcoag.ca

www.harcoag.ca



TABLE OF CONTENTS





NT 78 Rock Picker Pick More, Move More.





NT 60 Rock Picker For the Mid-sized Operation.



RR 4300 Rock Rake The Perfect Partner to the NT Rock Picker.

OUR MISSION

Our mission is to design, manufacture and distribute the highest quality, most durable and reliable farm equipment in the world, which is affordable and meets or exceeds the expectations of our most demanding customers.

Highline Manufacturing is a division of Bourgault Industries Ltd. and as such shares a common standard of "pursuing perfection" in their business approach. Highline's shared approach is to develop relevant products of the highest quality that exceed the expectations of our most discerning customers.







THE NT ROCK PICKER just hook up and GO!

Spring Adjustment/Replacement

Exclusive to the industry, the Highline® coil spring provides uniform loading over the reel operating range combined with the most compact mounting. This ensures that the spring mechanism is protected from rock damage, resulting in years of service. Replacing the springs just got easier with a simple threaded bolt to apply or remove tension to the spring.



The Highline® Tine

The Highline® rock picker tine is designed to follow the reel; this aids in raising rocks while allowing dirt to fall through. As well, the tines are extremely durable as they are hard surfaced on both the top and bottom leading edges.



Drive System

Highline® uses an industry exclusive gearbox that stands the test of time. The hydraulically driven gear case ensures large oil bathed gears set the reel at the desired speed. The hydraulic drive provides the flexibility to turn on, turn off, and reverse the reel from your fingertips.







Why the Highline® Rock Picker is Better?


The Secret is in the Guided Reel:


It is as simple as 1, 2, 3!


- 1. The bogie wheels follow a special track to guide the reel for improved picking action. When the guided reel travels parallel to the ground surface, it pulls the rocks toward the apron rather than pushing down on the rocks.
- 2. The guided reel lifts the rocks onto the apron.
- 3. The guided reel delivers the rocks to the center of the bucket and because the reel is guided it follows the same contour as the apron.

Conventional Picker

Conventional round reels have only a few inches of positive picking action. When the round reel contacts a rock on the downward cycle, rather than sweep the rock towards the apron, it pushes down on the rock. 8" and smaller rocks are often missed because the round reel buries the rock.



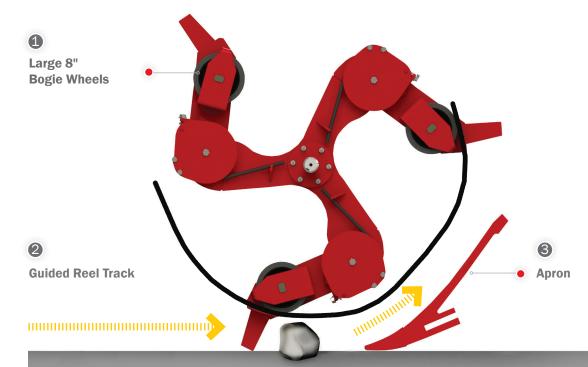



Two Position Hitch

The Highline® hitch design moves the rock picker fully into view of the operator and the entire picking width is outside the tractor tracks. The hitch also advances the rock picker to a new level of transport convenience with a self-locking hitch. The self-locking design doesn't require any pins or wedges; when you get to the field, the transport lock is required to be opened manually, returning to transport position engages the lock.



Durable Box Frame Construction

Highline[®] is the only rock picker with a box frame construction. The front frame is built high to let rocks in, yet ensure the structure is strong enough to withstand the most difficult rocks that are removed from the field.

High-Lift Design

The High-Lift minimizes wasted space from low flat rock piles by allowing higher more compact piles, or rocks can be transferred directly to a trailer for removal. For fast and convenient rock removal, Highline® rock pickers (NT 78 and NT 60) have a standard dumping height of 84".








NT 78/60 SPECIFICATIONS

	NT 78	NT 60
Width (Picking)	78" (1.98 m)	60" (1.52 m)
Transport Width with tires (machine center	144" (3.67 m) ered with tractor)	121 ¾" (3.09 m)
Working Width: To center of tractor (mac	hine is offset to right of t	ractor)
Position 1 - Dual Tractor Tires	186 ½" (4.74 m)	165" (4.19 m)
Position 2 - Single Tractor Tires	167 ½" (4.25 m)	147 ¼" (3.74 m)
Transport Length	242" (6.15 m)	245 ¼" (6.23 m)
Operating Length		
Position 1 - Dual Tractor Tires	228" (5.79 m)	228" (5.79 m)
Position 2 - Single Tractor Tires	238" (6.05 m)	238" (6.05 m)
Height	71 ¼" (1.81 m)	71 ¼" (1.81 m)
Dumping Height	84" (2.13 m)	84" (2.13 m)
Weight	7850 lb (3533 kg)	6910 lb (3110 kg)
Tongue Weight	940 lb (423 kg)	820 lb (369 kg)
Bucket Capacity	3.35 yd3 (2.56 m3)	2.57 yd3 (1.97 m3)
Tire Size	21.5L-16.1	16.5L-16.1
Tire Pressure	24 psi (166 kPa)	24 psi (166 kPa)
Minimum Horsepower	90 hp (67 kW)	70 hp (52 kW)
Maximum Horsepower	150 hp (112 kW)	135 hp (101 kW)
Hydraulic Hitch	Yes	Yes
Hydraulic Drive	Yes	Yes

	NT 78	NT 60	
Picking Style	Reel	Reel	
Number of Bats	3	3	
Minimum Rock Diameter	2" (51 mm)	2" (51 mm)	
Maximum Rock Diameter	24" (.61 m)	24" (.61 m)	
Lift Cylinder	3.5" x 34" (89 mm x 864 mm)	3.5" x 34" (89 mm x 864 mm)	
Recommended Reel Speed	@2 mph (3 km) - 23 rpm @4 mph (6 km) - 47 rpm	@2 mph (3 km) - 23 rpm @4 mph (6 km) - 47 rpm	
Hydraulic Outlets Required	3	3	
Hydraulic Pressure	2500 psi (17238 kPa)	2500 psi (17238 kPa)	
Flow Required	18 gpm (68 l/min)	18 gpm (68 l/min)	
Frame Rectangular Tubing	6" x 4" x 1/4" (152 mm x 102 mm x 6 mm)		
Replaceable Tines	Yes	Yes	
Hard Surfacing	Reel Arm Teeth & Apron Tines (Standard)		
Bucket Bottom is Grated	Yes	Yes	
Bucket Back is Grated	Yes	Yes	
Clearance Lights	Yes	Yes	

While every effort has been made to ensure that the information is accurate/current at the time of production, all specifications are subject to change.

For the latest product information, please visit: www.highlinemfg.com.

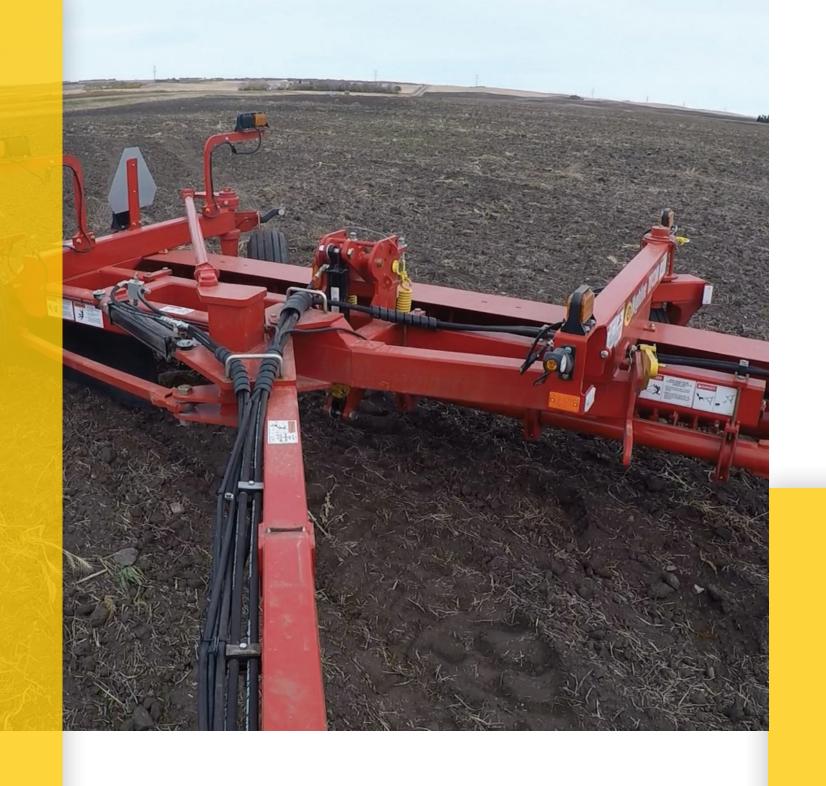

THE RR 4300 ROCK RAKE clears rocks - SIMPLY!

The RR 4300 rock rake is the perfect partner to the NT 60 and NT 78 rock picker! The RR 4300 rock rake makes fast work of moving rocks into a narrow row that can then be picked with the NT 60 or NT 78 rock picker. The stand-alone rock rake can keep moving while the rock picker is stopped to unload, resulting in more rock removed from a larger area in less time.



11

Transport Width

Transport Length

Tongue Weight

Height

Tire Size

Working Width - 20 degrees

Operating Length - 20 degrees



The Rotor - the Heart of the Rock Rake

la applila applila applila appli

The RR4300 rock rake has an adjustable raking angle of 10 degrees to 30 degrees with up and down positioning for efficiency and convenience. The teeth of the rock rake have a hard surfaced face as well as being designed to be reversible and replaceable.

Transport and Work Mode

Hydraulically switch between transport and work mode with ease!







Note: Right/left hand is determined by sitting in the tractor seat looking forward

154

97" (2.48 m)

160" (4.06 m)

239" (6.07 m)

252" (6.42 m) 72" (1.84 m)

3990 lb (1810 kg) Transport - 1256 lb (570 kg)

Working - 1036 lb (470 kg)

11L - 15F

RR 4300 SPECIFICATIONS

While every effort has been made to ensure that the information is accurate/current at the time of production, all specifications are subject to change.

For the latest product information, please visit: www.highlinemfg.com.

Tire Pressure (max.)	60 psi (413.7 kPa)
Hydraulic Drive	Yes
Minimum Horsepower	65 hp (49 kW)
Maximum Horsepower	75 hp (56 kW)
Hydraulic Outlets Required	3
Hydraulic Pressure (max. relieved)	3000 psi (20,684 kPa)
Hydraulic Flow Required	20 gpm (76 l/min)
Hydraulic Hitch	Yes
Hydraulic Drive	Yes
Raking Style	Rotor
Number of Replaceable Teeth	100
Replaceable and Reversible Te	eth Yes

Rotor Teeth

Hard Surfacing

13











YOUR LOCAL PROFESSIONAL HIGHLINE DEALER:	
	Printed in Canada - 09.22



Highway #27, PO Box 307 Vonda, SK, Canada SOK 4N0

www.highlinemfg.com



TABLE OF CONTENTS



FS 1800 Stack Square Bales YOUR Way.



FS 1200 Stack with Added Flexibility.



18

BM 1400 Pick From Both Sides.



22

BM 607 Great for Short Hauls.



22

BM 605 Contouring Advantage in Uneven Terrain.

OUR MISSION

Our mission is to design, manufacture and distribute the highest quality, most durable and reliable farm equipment in the world, which is affordable and meets or exceeds the expectations of our most demanding customers.


Highline Manufacturing is a division of Bourgault Industries Ltd. and as such shares a common standard of "pursuing perfection" in their business approach. Highline's shared approach is to develop relevant products of the highest quality that exceed the expectations of our most discerning customers.





On or Off the Strings

It's Your Choice.

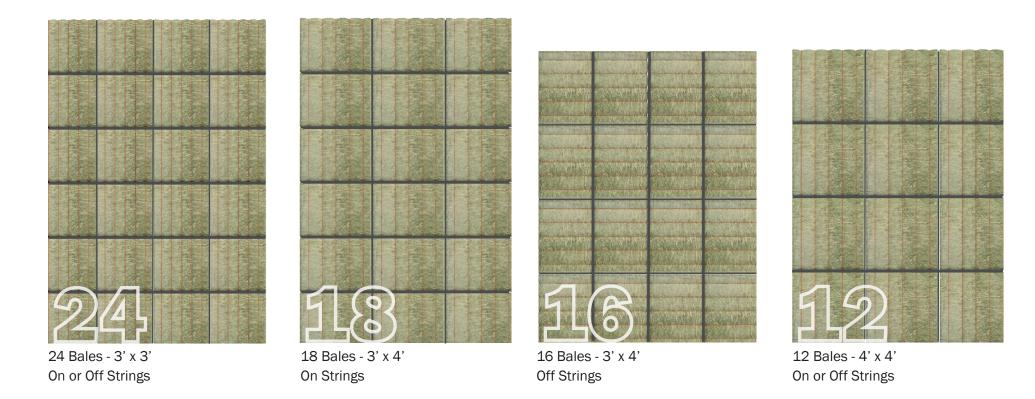

FASTACK[™] 1800

The number of bales that can be stacked is determined by the size of bale and the orientation of the bale. The FaStack™ can stack the bales "On Strings" (strings down) or "Off Strings" (strings on the side).

Flexibility in Stacking

With the FaStack[™] 1200.










Off Strings



FASTACK[™] 1200

FaStack™ indicates the ability to stack bales from the end of the stack with a rotating table, giving the user more flexibility as to where the bales can be stacked, whether it be in the field or in a shed.



MORE BALES per load

When every second counts, clear the field quickly. The Highline® FaStack™ allows you to do more, faster. With more bales per load than the competition, one operator can effectively retrieve bales from the field and stack them efficiently, making fewer trips, minimizing your costs, and maximizing your productivity.




1



FASTACK™ 1800 Bale Turn Technology

With the Highline® FaStack™ you have the choice of stacking 'on' or 'off' strings, all from a hand-held remote with no manual adjustments of the machine. With the flip of a switch, you decide how the bales will stack.







IMPROVED CONTROLS

Taking control of the FaStack™ is easily done. The touch screen and remote control puts all of the unit's controls in one hand, allowing you to easily drive the tractor and operate the FaStack™ at the same time.





ON STRING





Bumper

The bumper cushions the impact of the bale to help maintain machine life and keep the integrity of the bale intact.

Clamp •

The patented clamp arm grabs and lifts the bales up off the ground preventing scrubbing.

One and Done

needs.

One tip is all it takes to unload. The load is gently and securely lifted to unload the stack.



Side Rails

Side rails secure the bales to keep them in place.



Flipper Bale Assist

Allows flexibility in your For supporting the bale during lift for a gentle transition from stacking, giving you the the ground to the table. option to stack on or off the strings, depending on your Minimize stress on the bale during loading.



FS 1800 SPECIFICATIONS

Bale Capacity		
3' x 3' (Max. Weight - 1000	lb/454 kg)	24
3' x 4' On String (Max. Weig	ht - 14 00 lb/635 kg)	18
3' x 4' Off String (Max. Wei	ght - 11 00 lb/499 kg)	16
4' x 4' (Max. Weight - 1400	lb/635 kg)	12
Maximum Length of Bales		8' (2.44 m)
Length - Deck Lowered		31' 11" (9.73 m)
Length - Deck Raised		35' 1" (10.69 m)
Transport Height (Max)		10' 9" (3.27 m)
Height - Bed Tilted		17' 9" (5.40 m)
Transport Width - With Side Ra	acks	13' 7" (4.14 m)
Transport Width - Without Side Racks		N/A
Width - Arm Lowered (Clamp C	closed)	• • • • • • • • • • • • • • • • • • • •
With Side R	18' 8" (5.69 m)	
Without Side Racks		N/A
Unloaded Weight		16796 lb (7625 kg
Hitch Weight Empty		3360 lb (1525 kg)
Hitch Weight - Loaded	Cat 3	Cat 4
3' x 3'	N/A	7410 lb (3361 kg)
3' x 4' On String	N/A	7300 lb (3311 kg)
3' x 4' Off String	N/A	7340 lb (3329 kg)
4' x 4'	N/A	7150 lb (3243 kg)

GVW	41996 lb (19066 kg)
Maximum Load Capacity	25200 lb (11441 kg)
Minimum HP	150 hp (112 kW)
Recommended HP	180 hp (134 kW)
Hydraulic Outlets Required	1
Recommended Hyd. Flow	25 GPM @ 3000 psi
•••••	(95 lpm @ 207 Bar)
Controls	Electric over Hydraulic Hand Held
••••••	Joystick with Touch Screen
Spindles	4 x 16000 lb (7264 kg)
•••••	4 spindles, 4" (900 mm) Diameter
Hubs	10 Bolt type
Tires	Four 550 x 45 x 22.5 Flotation
Side Rails	Standard
Tractor Hydraulic System	Open or Closed Center
Picking Orientation	Same Direction as Baling
Minimum Shed Rafter Height	N/A

While every effort has been made to ensure that the information is accurate/current at the time of production, all specifications are subject to change. For the latest product information, please visit: www.highlinemfg.com.

The FaStack[™] 1800 uses a convenient in cab 12V 15 amp control.



STACKING MADE simple

The FaStack[™] 1200 comes equipped with a tandem walking beam axle with high flotation tires and an easy to use joystick and touch screen monitor. The rotating front table (on/off) allows the ability to tie stack. For added security, side rails keep the bales in place for fast stacking.







Two different stacking configurations!

Side stacking with the front table turned off (with the side rack option) gives you faster unloading.

End stacking with the front table turned on gives you a tighter stack.

FS 1200 Advantage

FS 1200 SPECIFICATIONS

Bale Capacity - Cat 3			GVW	34356 lb (15598 kg)
3' x 3' (Max. Weight - 1	000 lb/454 kg)	12	Maximum Load Capacity	19200 lb (8717 kg)
3' x 4' On String (Max.)	Weight - 1000 lb/454 kg)	12	Minimum HP	150 hp (112 kW)
3' x 4' Off String (Max.	Weight - 12 00 lb/544 kg)	8	Recommended HP	180 hp (134 kW)
4' x 4' (Max. Weight - 1	200 lb/544 kg)	8	Hydraulic Outlets Required	1
Bale Capacity - Cat 4			Recommended Hyd. Flow	25 GPM @ 3000 psi
3' x 3' (Max. Weight - 1	600 lb/726 kg)	12		(95 lpm @ 207 Bar)
3' x 4' On String (Max.)	Weight - 1600 lb/726 kg)	12	Controls	Electric over Hydraulic Hand-Held
3' x 4' Off String (Max.	Weight - 1800 lb/816 kg)	8		Joystick with Touch Screen
4' x 4' (Max. Weight - 1	800 lb/816 kg)	8	Spindles	4 x 16000 lb (7264 kg)
Maximum Length of Bales		8' (2.44 m)		4 spindles, 4" (900 mm) Diameter
Length - Deck Lowered		34' 1" (10.38 m)	Hubs	10 Bolt type
Length - Deck Raised		38' (11.60 m)	Tires	Four 550 x 45 x 22.5 Flotation
Transport Height (Max)		10' 12" (3.34 m) Side Rails		Optional
Height - Bed Tilted		19' 5" (5.92 m)	Picking Orientation Same Direction as Bal	
Transport Width - With Side	e Racks	10' 7" (3.21 m)		
Transport Width - Without	Side Racks	9' 11" (3.02 m)		
Width - Arm Lowered (Clan	np Closed)			
With	Side Racks	15' 8" (4.76 m)		
Witho	ut Side Racks	14' (4.57 m)		
Unloaded Weight		15156 lb (6881 kg)	While every effort has been made to ensure that the information is accurate/current the time of production, all specifications are subject to change. For the latest production, please visit: www.highlinemfg.com.	
Hitch Weight Empty		3651 lb (1658 kg)		
Hitch Weight - Loaded	Cat 3 (Tractor Hitch)	Cat 4 (Tractor Hitch)		
3' x 3'	5840 lb (2649 kg)	7360 lb (3338 kg)		
3' x 4' On String	5840 lb (2649 kg)	7360 lb (3338 kg)		
3' x 4' Off String	5940 lb (2694 kg)	7250 lb (3289 kg)		
4' x 4'	5940 lb (2694 kg)	7250 lb (3289 kg)		














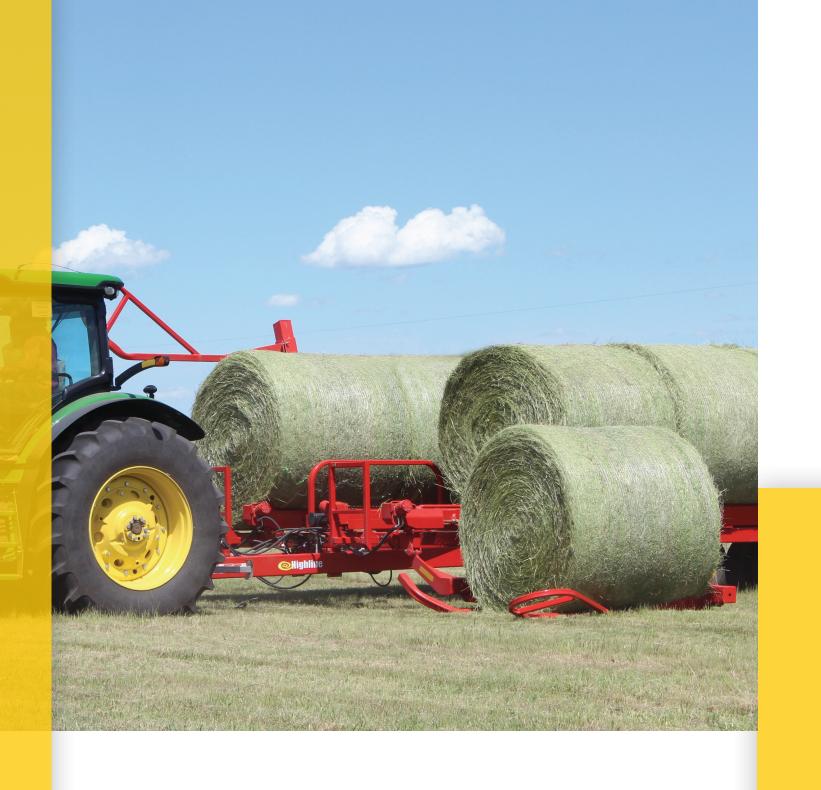

PICK FROM both sides

Highline® makes picking bales a breeze. Unloading can be done without ever leaving the cab and with Highline's ingenuity built into every bale mover, you can expect faster bale hauling with only one tractor and operator.



тэ

BM 1400 SPECIFICATIONS

Double Row	
100 hp (75 kW)	
2	
15 GPM @ 3000 psi	
60 lpm @ 207 Bar	
16 x 4' (1.22 m), 14 x 5' (1.52 m)	
1740 lb (790 kg)	
3423 lb (1554 kg)*	
9660 lb (4386 kg)	
38000 lb (17252 kg)	
Eight 11L-15 12 ply	
	100 hp (75 kW) 2 15 GPM @ 3000 psi 60 lpm @ 207 Bar 16 x 4' (1.22 m), 14 x 5' (1.52 m) 1740 lb (790 kg) 3423 lb (1554 kg)* 9660 lb (4386 kg) 38000 lb (17252 kg)

* If there are no bales behind the rear axle of the bale mover, the partially loaded hitch weight can exceed the fully loaded hitch weight even though the overall total is less than fully loaded.

37' (11.28 m)	
43' 9" (13.34 m)	
16' 8" (5.08 m)	
15' 2" (4.61 m)	
12' 3" (3.74 m)	
8" x 3" x ½ w	
6"x 6" (152 mm x 152 mm)	
3½" x 13" (89 mm x 330 mm)	
3½" x 16" (89 mm x 406 mm)	
2062 H	
Standard	
Standard	
	43' 9" (13.34 m) 16' 8" (5.08 m) 15' 2" (4.61 m) 12' 3" (3.74 m) 8" x 3" x ½ w 6"x 6" (152 mm x 152 mm) 3½" x 13" (89 mm x 330 mm) 3½" x 16" (89 mm x 406 mm) 2062 H Standard

All weights and transport dimensions are estimates and are subject to change.

While every effort has been made to ensure that the information is accurate/current at the time of production, all specifications are subject to change. For the latest product information, please visit: www.highlinemfg.com.

Highline® offers non-stop picking and transporting with only one tractor and operator!



All Bale Mover Models have a standard ¼ turn bale fork to automatically turn bales for non-stop loading from virtually any angle.

Chain Rails Polished chain rails are easily adjusted to match different bale sizes. Chain rails are sloped and factory ground to conform to the curvature of round bales, eliminating the need for cleats and reducing broken twines.

A hydraulic motor controls the chains and eliminates gearboxes, bearings and shafts. (Either row of chains can be operated independently on the Bale Mover 1400 allowing you to fill one side before filling the other or fill randomly and out of sequence on either side.)

- In-cab electric over hydraulic controls give full hydraulic control with only two hydraulic outlets on your tractor
- Undercarriage that walks both side to side and front to back

As the quarter turn lift arm begins to lift the bale, the forward motion slides the bale precisely into position for accurate placement on main bed.

Load soft or wet bales with ease.

Bale rows are designed to give the operator good visibility behind the bale mover. Transport lights and a transport safety chain are standard.


From the cab of the tractor, the deck is lifted hydraulically. The tail of the bale mover is designed to skid over the ground during the unloading process which helps facilitate the bale chains transfer of the bales onto the ground.

Fiber wound bushings on chrome shafts.



Unload Without Ever Leaving The Tractor

Back up the Highline® Bale Mover where you want the bales, tilt the bed, engage the conveyor chains and drive slowly forward. Bales are stored in a long, straight row to minimize weathering damage. 21

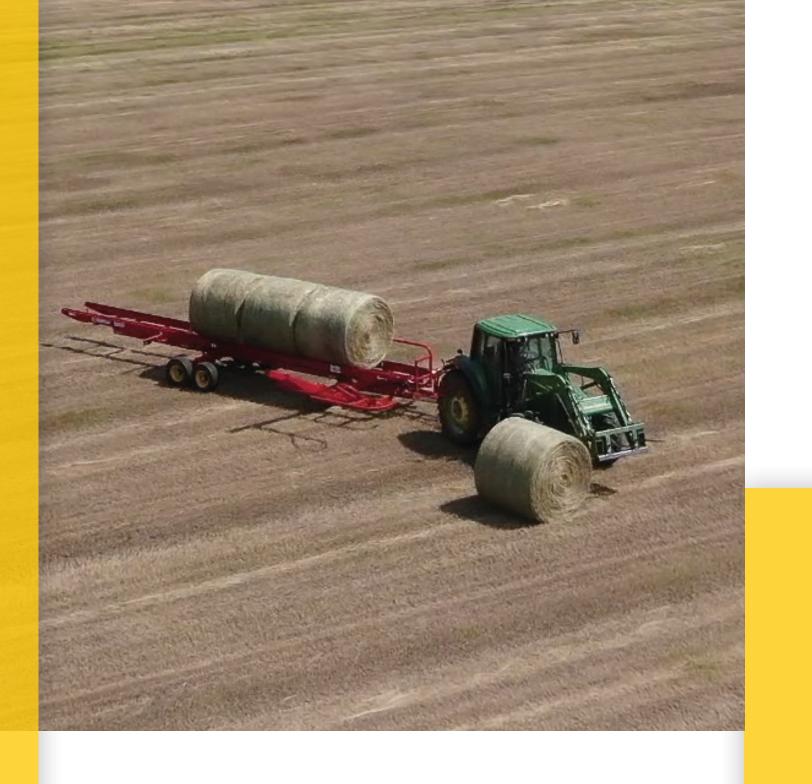

BALE MOVING made easy

Highline's BM 605 and BM 607 features benefits such as narrow transport and the Auto Bale Shuttle to shift your bales while loading. These features help make bale moving fast and easy, saving you time and money.





BM 605/607 SPECIFICATIONS

MODEL	BM 605	BM 607		
Configuration	Single Row	Single Row	Ead	
Horsepower Required	80 hp (60 kW)	90 hp (67 kW)	am	
Hydraulic Outlets Required	2	2		
Recommended Hyd. Flow	15 GPM @ 3000 psi	15 GPM @ 3000 psi	If t	
	60 lpm @ 207 Bar	60 lpm @ 207 Bar	ba ca	
Bale Capacity	6 x 4' (1.22 m), 5 x 5' (1.52 m)	8 x 4' (1.22 m), 7 x 5' (1.52 m)	the	
Tongue Weight (Unloaded)	1372 lb (623 kg)	13750lb (613 kg)		
Tongue Weight (Loaded)	2255 lb (1024 kg)*	2283 lb (1036 kg)*	All	
Shipping Weight (Unloaded)	5272 lb (2393 kg)	5826 lb (2645 kg)	est	
Tires	Four 280-70R15 12 ply	Four 280-70R15 12 Ply	Wr tha	
GVW	15840 lb (7191 kg)	15840 lb (7191 kg)	tin	
Bed Length	26' 9" (8.15 m)	37' 4" (11.39 m)	to	
Overall Length	33' 5" (10.19 m)	44' 1" (13.44 m)	ple	
Transport Width	8' 4" (2.55 m)	8' 4" (2.55 m)		
Transport Width - With Axle E	extension 9' (2.74 m)	9' (2.74 m)		
Width Unloaded	8' 4" (2.55 m)	8' 4" (2.55 m)		
Transport Height (Max)	13' 2" (4.01 m)	13' 2" (4.01 m)		
Bed Height	3' 5" (1.04 m)	3' 5" (1.04 m)		
Frame Rails 8"	x 3" x 1/4" w (203 mm x 76 mm x 6 mm)	8" x 3" x ½" w (203 mm x 76 mm x 6		
Load Arm	6" x 6" (152 mm x 152 mm)	6" x 6" (152 mm x 152 mm)		
Cylinders Bale Lift	5" x 14" (127 mm x 356 mm)	5" x 14" (127 mm x 356 mm)		
Cylinders Bed Lift	3" x 10" (76 mm x 254 mm)	3" x 10" (76 mm x 254 mm)		
Bale Chain	2062 H	2062 H		
Lights & Safety Chain	Standard	Standard		
Full Load Indicator	Standard	Standard		

Each model uses a convenient in cab 12V 15 amp control.

If there are no bales behind the rear axle of the bale mover, the partially loaded hitch weight can exceed the fully loaded hitch weight even though the overall total is less than fully loaded.

All weights and transport dimensions are estimates and are subject to change.

While every effort has been made to ensure that the information is accurate/current at the time of production, all specifications are subject to change. For the latest product information, please visit: www.highlinemfg.com.













YOUR LOCAL PROFESSIONAL HIGHLINE DEALER:	
	Printed in Canada - 06.23



Highway #27, PO Box 307 Vonda, SK, Canada SOK 4N0

www.highlinemfg.com





BP 660 Bale Pro® Dual Feed Roller Processor. Requires Minimal Maintenance.



BP 965 Bale Pro® Process Square or Round Bales - Adds Flexibility When Using Multiple Bale Types.



BP 661 Bale Pro[®] Chain & Slat Processor. Offers Ease of Use.



The Bale Pro® modular system
The Bale Pro®, Feed Chopper™ and Grain
Tank.



BP 663 TOP GUN® Delivers Effective Bedding and Coverage Solutions for Agriculture and Construction.



AMX 520T Perfect for the smaller to mid-size farm!

AMX 1000S Allows one operator to

perform all cattle feeding with a single

62

machine.



AMX 690T Low profile loading height.



AMX 850T Simple. Reliable. Cost Effective.





OUR MISSION

Our mission is to design, manufacture and distribute the highest quality, most durable and reliable farm equipment in the world, which is affordable and meets or exceeds the expectations of our most demanding customers.


Highline Manufacturing is a division of Bourgault Industries Ltd. and as such shares a common standard of "pursuing perfection" in their business approach. Highline's shared approach is to develop relevant products of the highest quality that exceed the expectations of our most discerning customers.







Much of the dialogue within the animal production community is about efficiency in utilization of resources and conversations on how consumers will buy product in the future. Both are future oriented but efficiency has an immediate effect and can be implemented with known methodology and existing technology. The beef industry is by nature an activity conducted on the fringe of agricultural inputs. Historically marginal grasslands were the main areas for animal production as they were largely available, and mixed farming was growing. Beef cows can successfully consume medium and low quality forages which are lower in cost than other available ingredients. However, changes in technology and specialization began to favour crop production due to yield increases. Over decades of time costs for crop inputs rose the equation became favourable again to beef production on marginal lands and is now strongly showing that producers who are committed to learning the Best Farming Practices for Beef will gain record returns for beef this year. Those who are rebuilding their herds may wait until next year but some are paying high prices for breeding stock already in anticipation of consumer demand staying strong and national herd numbers remaining tight at historically low numbers of cows not seen since the sixties. The emphasis at the farm level is to look at incorporating technology to improve the bottom line. Highline[™] is positioned well to assist farmers with various levels of technology in feeding and mixing. Bale Pro's equipped with a chopper can improve utilization of medium and low quality forages thereby letting the forage supply give more feeding days by reducing waste. Mixers can blend forages to achieve more accurate formulations and expand the range of formulations to achieve strategic feeding plans. Highline[™] is set with information and an expanded product line to meet the challenges at the farm gate for dairy and beef producers. We look forward to working with dealers and farmers to increase efficiency and improve farmers' profitability wherever possible.

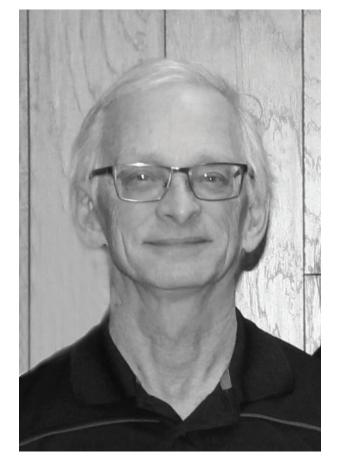

CORPORATE RUMINANT NUTRITIONIST

John Maltman, M.Sc., P.Ag.

For further details on Precision Feeding visit: www.highlinemfg.com

BALE PRO models

Dual Feed Roller Processor Requires Minimal Maintenance

BP 660 Bale Pro[®]

PAGE 10

Chain & Slat Processor
Offers Ease of Use

BP 661 Bale Pro®

4 MODELS - each with unique advantages.

The Bale Pro® series from Highline® allows you to efficiently process round and square bales (model dependent). With 4 options to choose from there's one that is the best fit for your cattle operation. The Bale Pro® modular system allows you to expand your machine as your operation evolves.



Delivers Effective Bedding and Coverage Solutions for Agriculture and Construction

BP 663 TOP GUN®




Process Square or Round Bales - Adds Flexibility
When Using Multiple Bale Types

BP 965 Bale Pro[®]

PAGE 16 PAGE 28

,

RAI F PRO® MODELS

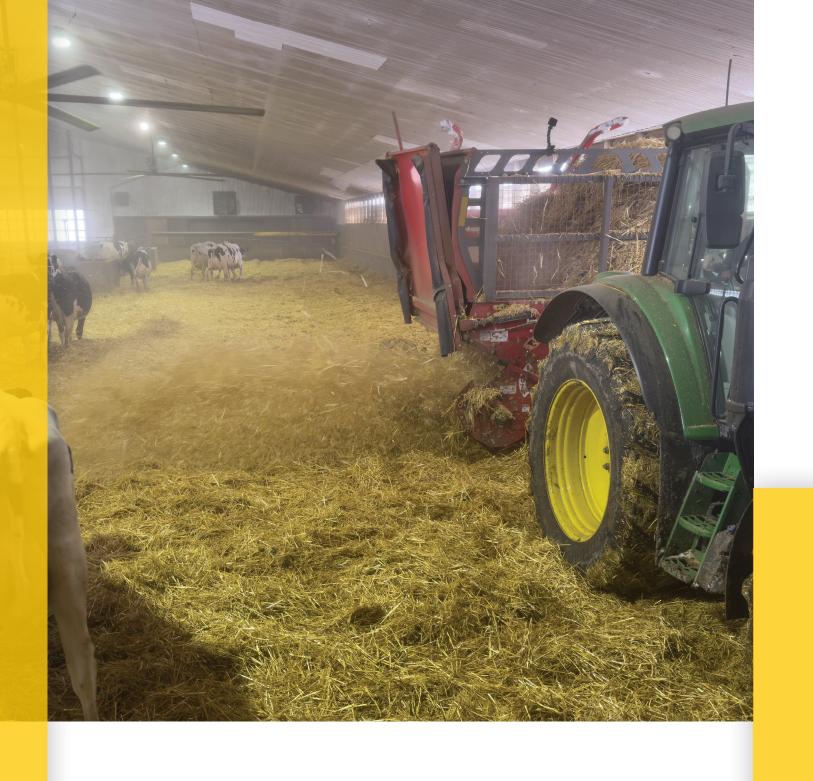

PROCESS this way


The BP 660 Bale Pro® is a great option for cattle operations looking for a durable, well-engineered bale processor. The BP 660 Bale Pro® has a dual feed roller processing chamber with a centrally driven flail drum. Expand your BP 660 by adding a Feed Chopper™ and Grain Tank (See page 36 for additional information on the Bale Pro® modular system).

PRECOSION feeding



1

D GGO BALF PRO

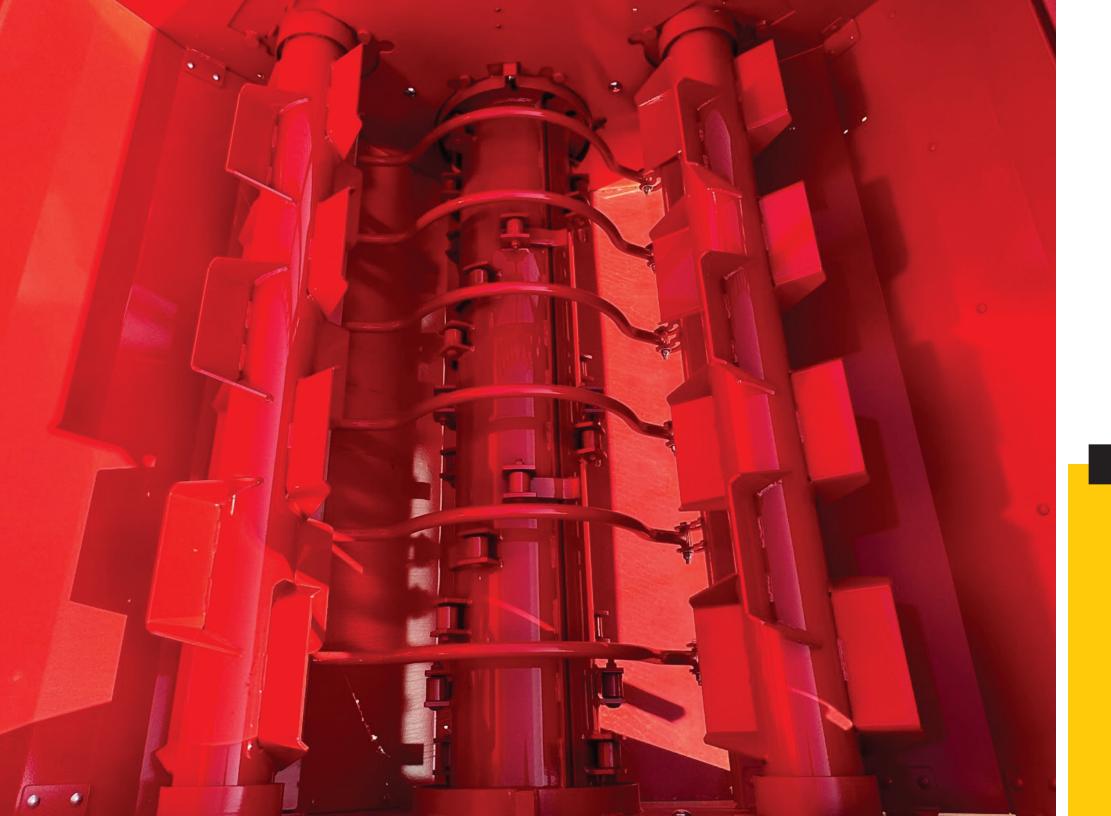


The **Dual Feed Roller Processing Chamber** of the **BP 660 Bale Pro**[®]

Dual feed roller processing chamber also on the BP 663 TOP GUN° and BP 965 Bale Pro°.

The Highline® flails efficiently "bite" into the bale for uniform feed processing. The flails are optimally sized to grab the bale.

The stepped shaft design is machined from a single length of material vastly improving strength and durability of the

The flails are designed in a spiral formation. This spiral formation ensures that the bale is continuously pulled and processed resulting in consistent feed. Also, the flail drum is digitally balanced for smooth performance and long bearing life.

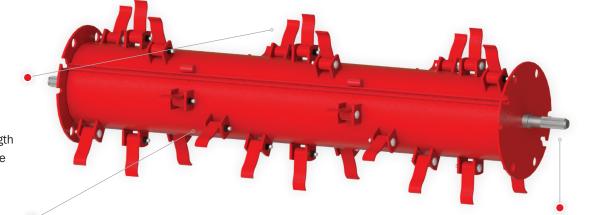

1 Guard Rods

The bale sits partially on the guard rods. The flails protrude through the guard rods grabbing the bale and pulling it through. The guard rods are shaped to provide a very uniform rate of processing.

Additional guard rods can easily be added for more bale control while processing.

2 Adjustable Aggression

Bales can be processed more or less aggressively depending on your needs. Processing can be set in a range of 1-5, with 1 being the slowest and 5 being the fastest processing rate. Flails engage the bale from $\frac{1}{8}$ " up to $\frac{1}{3}$ /4" for faster processing.

come with four rows of steel paddles. This design pulls the feed through for more consistent processing and reduced build up of material. The dual feed rollers allow the flail drum to be centrally located in the chamber providing up to 60' (18.3 m)* of material

discharge distance.

3 Feed Rollers

Highline® feed rollers

* Contingent on environmental and operating conditions.

13

Shaft Design

Fork Length Fork Position Indicator Fork length of 67 1/2" (1.71 m) for full bale For improved positioning engagement Adjustable Forks (up to 50" between when loading the second inside faces) Lift bales from the smallest silage up to 6' (1.83 m). Lift from the row and load them Adjustable Axles into the Bale Pro®. Adjust to a wide stance in uneven terrain for stability, or adjust to a **Rear Deflectors** narrow stance for passing Standard on all models. through gates and narrow barn doors. Screen Design Hi-Flotation Tires For better material containment. Each Bale Pro® model is designed with appropriately Dual Feed Roller Processing Chamber sized hi-flotation tires allowing for easy (See page 13). maneuverability through challenging terrain. Hose Holder **Axle Twine Guard** Discharge Door Keep hoses protected and out of the mud! Quickly hook up to the tractor with the The singular, flat smooth top The Axle Twine Guard hoses now located conveniently beside the allows for easy cleaning. The eliminates the nuisance tractor remotes. The hose holder locks out magnetic curtain retainers of twine getting tightly break free when obstructed. of the way during hook up or for shipping. wrapped around the wheel axle. **Motor Protection Valve**

Reduces pressure spikes increasing the

motor life and durability.

BP 660 SPECIFICATIONS

	Base 660 Bale Pro®	Base 660 Bale Pro® with Feed Chopper™	Base 660 Bale Pro® with Grain Tank	Base 660 Bale Pro®with FC* & GT**
PTO Minimum HP	85 hp (64 kW)	125 hp (94 kW)	100 hp (75 kW)	125 hp (94 kW)
PTO Recommended HP	100 hp (75 kW)	140 hp (105 kW)	125 hp (94 kW)	140 hp (105 kW)
Transport Width	112" (2.84 m)	112" (2.84 m)	141 ½" (3.59 m)	141 ½" (3.59 m)
Transport Height	130 ½" (3.31 m)	130 ½" (3.31 m)	130 ½" (3.31 m)	130 ½" (3.31 m)
Working Height Maximum	152" (3.86 m)	152" (3.86 m)	152" (3.86 m)	152" (3.86 m)
Length to End of Tires	174" (4.42 m)	174" (4.42 m)	174" (4.42 m)	174" (4.42 m)
Length to End of Forks Down	223 ½" (5.68 m)	223 ½" (5.68 m)	223 ½" (5.68 m)	223 ½" (5.68 m)
Discharge***	Right Hand	Right Hand	Right Hand	Right Hand
Weight	5050 lb (2291 kg)	5820 lb (2640 kg)	6090 lb (2762 kg)	6860 lb (3112 kg)
Tongue Weight (Unloaded)	1610 lb (730 kg)	1890 lb (857 kg)	1975 lb (896 kg)	2225 lb (1009 kg)
Hydraulics	3 Remote	3 Remote	3 Remote	3 Remote
Driveline	1000 rpm PTO 1%" 21 Spline	1000 rpm PTO 13%" 21 Spline	1000 rpm PTO 1%" 21 Spline	1000 rpm PTO 1%" 21 Spline
Tires	16.5L x 16.1	16.5L x 16.1	16.5L x 16.1	16.5L x 16.1
Size of Bales	Up to 6' (1.83 m) diameter	Up to 6' (1.83 m) diameter	Up to 6' (1.83 m) diameter	Up to 6' (1.83 m) diameter
Discharge End Curtains, Top and Rear Deflectors	Standard	Standard	Standard	Standard
2 Hydraulic Remote	Option	Option	Option	Option
* FC - Feed Chopper	*** Right /left hand is determined by sitting All Weights and transport dimensions are estimates and are subject to change.		o change.	

^{*} FC - Feed Chopper

All weights and transport dimensions are estimates and are subject to change.


While every effort has been made to ensure that the information is accurate/current at the time of production, all specifications are subject to change.

If livestock is being fed, it is the operator's responsibility to ensure that the materials in the processed feed mix are suitable. Some of the wrapping material (twine, net wrap or other materials) may be discharged with the feed if the wrapping materials are not removed prior to processing.

For the latest product information, please visit: www.highlinemfg.com.

^{**} Grain Tank capacity - 45 bushels (1587 L)

^{***} Right/left hand is determined by sitting in the tractor seat looking forward.

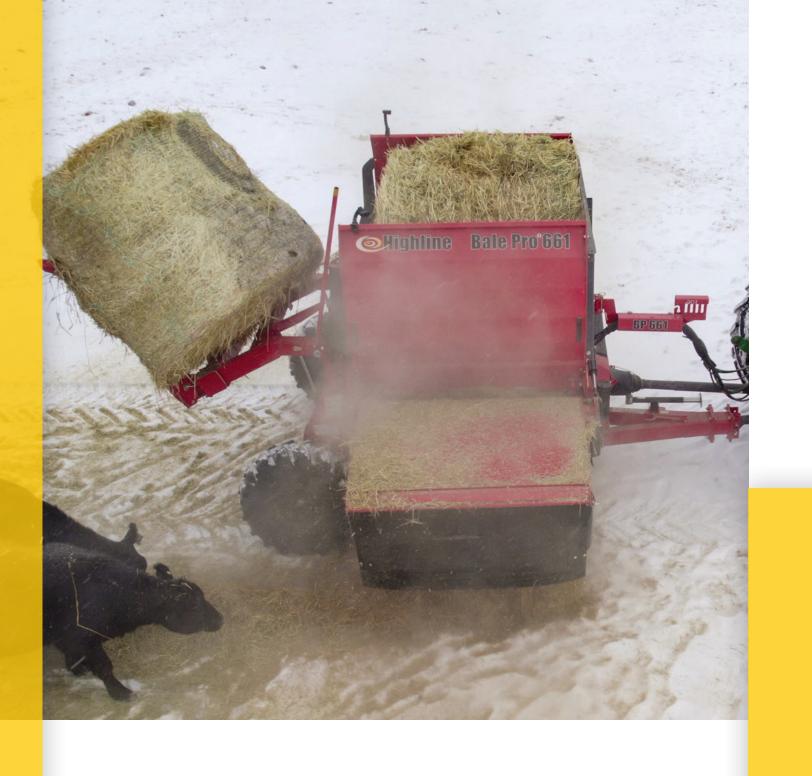

PROCESS that way

The BP 661 Bale Pro® is also a great option for cattle operations looking for a durable, well-engineered bale processor. An alternative to the BP 660 Bale Pro®, the 661 Bale Pro® has a slat and chain processing chamber with an offset flail drum. Expand your BP 661 by adding a Feed Chopper™ and Grain Tank (See page 36 for additional information on the BP modular system).

PRECOSION feeding



1




The Slat & Chain Processing Chamber of the BP 661 Bale Pro®

The Highline® flails efficiently "bite" into the bale for uniform feed processing. The flails are optimally sized to grab the bale.

The stepped shaft design is machined from a single length of material vastly improving strength and durability of the drum.

The flails are designed in a spiral formation. This spiral formation ensures that the bale is continuously pulled and processed resulting in consistent feed. Also, the flail drum is digitally balanced for smooth performance and long bearing life.

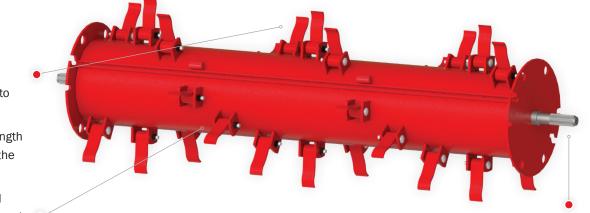

1 Guard Rods

2 Adjustable Aggression

Guard rods are designed for uniform processing from beginning to end.

Bales can be processed more or less aggressively depending on your needs. Processing can be set in a range of 1-5, with 1 being the slowest and 5 being the fastest processing rate. Flails engage the bale from ¹/₈" up to 1 ¹/₂" for faster processing.

3 Slat & Chain Feeder

The Highline® Slat & Chain feed system is designed utilizing durable 2080H chain with no center bearing on the feeder chain rollers.



_ 1

Shaft Design

1 DAI E DD

00 661 0

Fork Length Adjustable Forks (up to 50" between **Fork Position Indicator** Fork length of 67 ½" (1.71 m) for full inside faces) bale engagement. For improved positioning Lift bales from the smallest silage up to 6' when loading the second (1.83 m). Lift from the row and load them into the Bale Pro®. Side Shields Adjustable Axles Contoured to match large bale profiles for Adjust to a wide stance improved flail engagement. in uneven terrain for stability, or adjust to a **Rear Deflectors** narrow stance for passing Standard on all models. through gates and narrow barn doors. Screen Design For better material containment. Hi-Flotation Tires Each Bale Pro® model is Slat & Chain Processing Chamber designed with appropriately (See page 19). sized hi-flotation tires allowing for easy maneuverability through challenging terrain. Hose Holder Keep hoses protected and out of the mud! **Axle Twine Guard** Discharge Door Quickly hook up to the tractor with the The singular, flat smooth top The Axle Twine Guard hoses now located conveniently beside the allows for easy cleaning. The eliminates the nuisance tractor remotes. The hose holder locks out magnetic curtain retainers of twine getting tightly of the way during hook up or for shipping. break free when obstructed. wrapped around the wheel axle. Drive Tensioning System Easy and simple to use tensioner keeps

the belt tight to avoid slippage.

BP 661 SPECIFICATIONS

	Base 661 Bale Pro®	Base 661 Bale Pro® with Feed Chopper™	Base 661 Bale Pro® with Grain Tank	Base 661 Bale Pro® with FC* & GT**
PTO Minimum HP	85 hp (64 kW)	125 hp (94 kW)	100 hp (75 kW)	125 hp (94 kW)
PTO Recommended HP	100 hp (75 kW)	140 hp (105 kW)	125 hp (94 kW)	140 hp (105 kW)
Transport Width	112" (2.84 m)	112" (2.84 m)	148 ½" (3.77 m)	148 ½" (3.77 m)
Transport Height	130 ½" (3.31 m)	130 ½" (3.31 m)	130 ½" (3.31 m)	130 ½" (3.31 m)
Working Height Maximum	152" (3.86 m)	152" (3.86 m)	152" (3.86 m)	152" (3.86 m)
Length to End of Tires	181" (4.60 m)	181" (4.60 m)	181" (4.60 m)	181" (4.60 m)
Length to End of Forks Down	230" (5.84 m)	230" (5.84 m)	230" (5.84 m)	230" (5.84 m)
Discharge***	Right Hand	Right Hand	Right Hand	Right Hand
Weight	5685 lb (2579 kg)	6430 lb (2917 kg)	6710 lb (3044 kg)	7465 lb (3386 kg)
Tongue Weight (Unloaded)	1935 lb (878 kg)	2175 lb (987 kg)	2280 lb (1034 kg)	2480 lb (1125 kg)
Hydraulics	3 Remote	3 Remote	3 Remote	3 Remote
Driveline	1000 rpm PTO 1%" 21 Spline	1000 rpm PTO 1%" 21 Spline	1000 rpm PTO 1%" 21 Spline	1000 rpm PTO 13/8" 21 Spline
Tires	16.5L x 16.1	16.5L x 16.1	16.5L x 16.1	16.5L x 16.1
Size of Bales	Up to 6' (1.83 m) diameter	Up to 6' (1.83 m) diameter	Up to 6' (1.83 m) diameter	Up to 6' (1.83 m) diameter
Discharge End Curtains, Top and Rear Deflectors	Standard	Standard	Standard	Standard
2 Hydraulic Remote	Option	Option	Option	Option
* FC - Feed Channer	which Dight / laft hand in data was and he asitting	All weights and transport dimensions are estimates and are subject to change		change

^{*} FC - Feed Chopper

All weights and transport dimensions are estimates and are subject to change.


While every effort has been made to ensure that the information is accurate/current at the time of production, all specifications are subject to change.

If livestock is being fed, it is the operator's responsibility to ensure that the materials in the processed feed mix are suitable. Some of the wrapping material (twine, net wrap or other materials) may be discharged with the feed if the wrapping materials are not removed prior to processing.

For the latest product information, please visit: www.highlinemfg.com.

^{**} Grain Tank capacity - 45 bushels (1587 L)

^{***} Right/left hand is determined by sitting in the tractor seat looking forward.

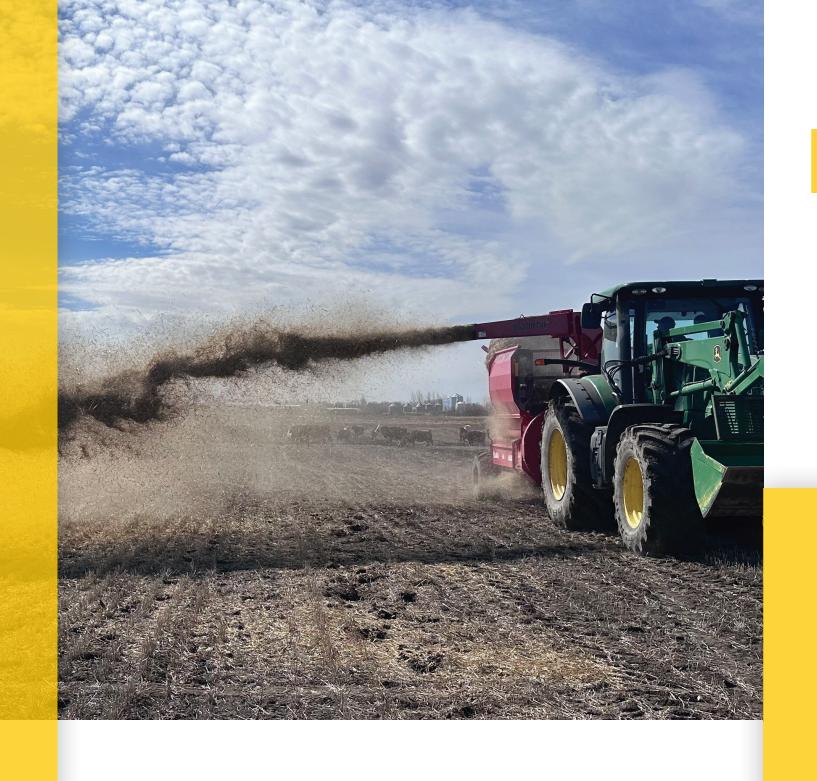

DELIVERING EFFECTIVE

bedding solutions

The Highline® BP 663 TOP GUN® is a rugged, highly effective agricultural implement for bedding and feeding applications, as well as coverage solutions for environmental and land reclamation. It provides uniform coverage as it throws material up to 80 feet (24.3 meters)*, or feeds by gently dropping a windrow from its side discharge.


* Contingent on environmental and operating conditions.

PRECOSION feeding



23

663 TOP GUN

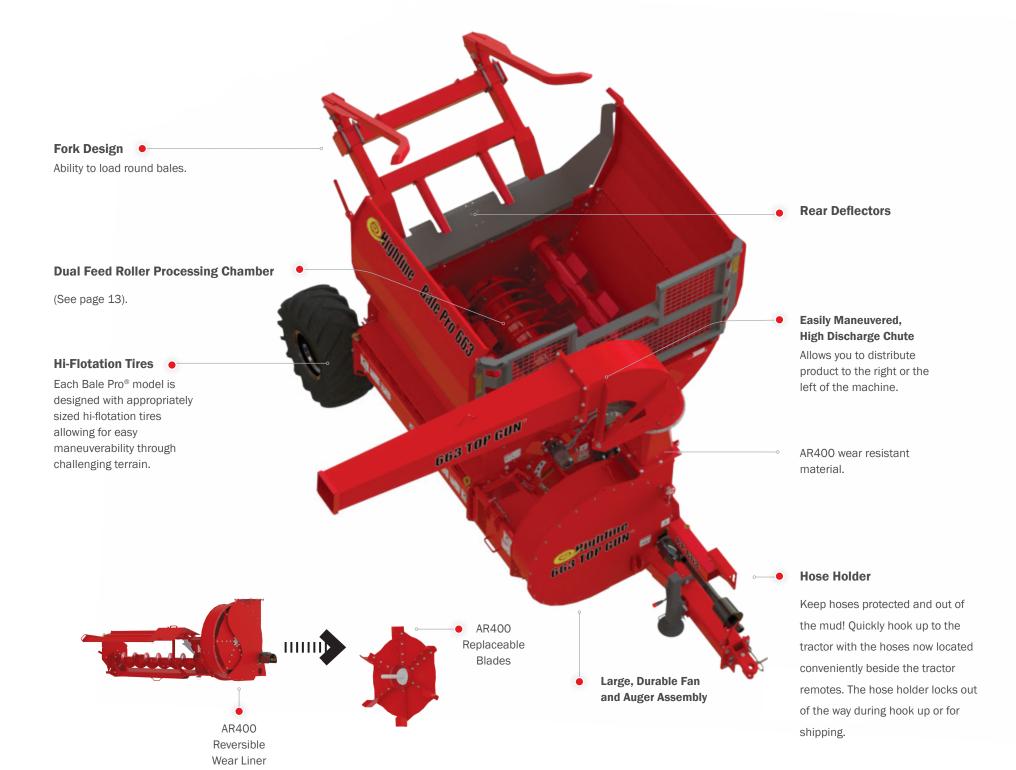


3 CHUTE OPTIONS AVAILABLE

Curved Discharge Chute

Long Discharge Chute

 Curved Discharge Chute with End Deflector



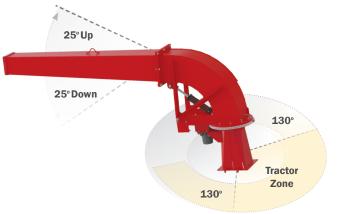



Joystick Control (optional)

The joystick control option is an easy to use single remote control for all functions including bale load, bale rotation and discharge chute control both horizontally and vertically. This option results in less operator fatigue with very little effort to perform all hydraulic functions of the machine.



Easily and accurately position the discharge chute from the tractor cab for accurate placement of feed or bedding. With a wide range of motion (chute rotates 130 degrees left and 130 degrees right, as well as 25 degrees up and down), the discharge chute (84" (2.13 m) long, 11' (3.35 m) high nozzle) can be directed to throw material up to 80' (24.3 m)*. NOTE: Right/Left hand is determined by sitting in the tractor seat looking forward.

^{*} contingent on environmental and operating conditions.



TOP GUN® SPECIFICATIONS

PTO Recommended HP	165 hp (124 kW)
Transport Width	108 ½" (2.75 m)
Transport Height	131 ½" (3.34 m)
Working Height Maximum (Nozzle Extended)	165" (4.19 m)
Length to End of Tires	203 ½" (5.17 m)
Length to End of Forks Down	250 ½" (6.37 m)
Weight	7780 lb (3518 kg)
Tongue Weight (Unloaded)	2815 lb (1277 kg)
Discharge	Left/Center/Right
Hydraulics	3 Remote
Driveline	1000 PTO 1 %" 21 Spline with over-running clutch

Tires	16.5L x 16.1
Size of Bales	Up to 6' (1.83 m) diameter
Top Deflectors	Standard
Rear Deflector	Standard
Rear Facing Lights	Option
1 Remote Joystick	Option
Hydraulic Aggression Control	Option

All weights and transport dimensions are estimates and are subject to change.

While every effort has been made to ensure that the information is accurate/current at the

If livestock is being fed, it is the operator's responsibility to ensure that the materials in the processed feed mix are suitable. Some of the wrapping material (twine, net wrap or other materials) may be discharged with the feed if the wrapping materials are not removed prior

For the latest product information, please visit: www.highlinemfg.com.



REAL flexibility

Ideal for feeding and bedding - the BP 965 Bale Pro® offers all of the proven design features found on the Highline® Bale Pro® series with the added flexibility to process round or square bales as desired...as well as other beneficial design features like a 9' (2.74 m) flail drum which increases processing rate.

PRECOSION feeding



SIMPLE

Design.



Loads large square bales lengthwise.

ROUND OR SQUARE . . IT DON'T CARE!

Adjustable forks for round or square bales:

The low profile fork cradles easily slide under the square bale allowing a single bale to be loaded without backing while the high outer edges account for misalignment by funneling the bale in between the two forks.


Loading rounds from a tight row? Simply pull a pin on each fork to collapse the extensions, allowing you to load without contacting the bale behind.

EXTREME

Lifting Power.

With the highest breakout force in the industry, the Highline® Vertical Lift design allows you to release even the most stubbornly frozen bales from the ground with ease. Also, because the bale is lifted straight up off of the ground, the scrubbing action against the bale stack is minimized, reducing bale damage and waste.

Lift Capacity



Lift Height

EFFICIENT LENGTHWISE PROCESSING

of Square Bales.

One of the challenges of processing square bales is maintaining both a high loading efficiency AND high processing efficiency (the competition fails to deliver on either one or the other). The BP 965 Bale Pro® capable of processing a 4' x 4' x 9' ** (1.2 x 1.2 x 2.7 m) bale in minutes! The Twine Sickle™ Bale Prepping System on the BP 965 helps with this efficiency.*



The vertical bale lift is a 2 stage lift system where the first stage of the process lifts the bale straight off of the ground. Little space is required to accommodate this design.



The bale is lifted.



The bale is aligned with the flail drum for efficient processing.



The Twine Sickle™ cuts the twine and the bale is dropped loosely into the tub (the loose consistency helps with uniform processing).

^{*}Bale processing times are contingent on bale type, aggression setting and tractor horsepower.

^{**}Forages may react differently when the twine pressure is removed.



Twine Sickle[™] Fork Position Indicator Effectively cut the twine on square bales. See pages 32-33. For improved positioning when loading the second bale. Fork Design Adjustable length fork design for round Adjustable Axles or square bales. Adjust to a wide stance in uneven terrain for stability, or adjust to a Rear Deflectors narrow stance for passing Standard on all models. through gates and narrow barn doors. Screen Design Hi-Flotation Tires • For better material containment. Each Bale Pro® model is designed with appropriately sized hi-flotation tires allowing for easy **Dual Feed Roller Processing Chamber** maneuverability through (See page 13). challenging terrain. **Axle Twine Guard** Discharge Door **Hose Holder** Keep hoses protected and out of the mud! The singular, flat smooth top The Axle Twine Guard Quickly hook up to the tractor with the allows for easy cleaning. The eliminates the nuisance hoses now located conveniently beside the magnetic curtain retainers of twine getting tightly tractor remotes. The hose holder locks out break free when obstructed. wrapped around the wheel of the way during hook up or for shipping. axle. **Motor Protection Valve**

Reduces pressure spikes increasing the

motor life and durability.

BP 965 SPECIFICATIONS

	Base 965 Bale Pro®	Base 965 Bale Pro® with Feed Chopper™	Base 965 Bale Pro® with Grain Tank	Base 965 Bale Pro® with FC* & GT**
PTO Minimum HP	100 hp (75 kW)	140 hp (105 kW)	100 hp (75 kW)	140 hp (105 kW)
PTO Recommended HP	115 hp (86 kW)	165 hp (122 kW)	125 hp (94 kW)	165 hp (122 kW)
Transport Width	112" (2.84 m)	112" (2.84 m)	141 ½" (3.59 m)	141 ½" (3.59 m)
Transport Height	136" (3.45 m)	136" (3.45 m)	136" (3.45 m)	136" (3.45 m)
Working Height Maximum	189 ½" (4.81 m)			
Length to End of Tires	210" (5.33 m)	210" (5.33 m)	210" (5.33 m)	210" (5.33 m)
Length to End of Forks Down	302" (7.67 m)	302" (7.67 m)	302" (7.67 m)	302" (7.67 m)
Discharge***	Right Hand	Right Hand	Right Hand	Right Hand
Hydraulics	3 Remote	3 Remote	3 Remote	3 Remote
Driveline	1000 rpm PTO 13/8" 21 Spline	1000 rpm PTO 1%" 21 Spline	1000 rpm PTO 13/8" 21 Spline	1000 rpm PTO 1%" 21 Spline
Weight	7375 lb (3345 kg)	8390 lb (3806 kg)	8480 lb (3847 kg)	9495 lb (4307 kg)
Tongue Weight (Unloaded)	2400 lb (1088 kg)	2760 lb (1252 kg)	2715 lb (1232 kg)	3070 lb (1393 kg)
Tires	16.5L x 16.1	16.5L x 16.1	16.5L x 16.1	16.5L x 16.1
Max. Size of Bales Round Square	6' (1.83 m) 4' x 4' x 9' (1.2 x 1.2 x 2.7 m)	6' (1.83 m) 4' x 4' x 9' (1.2 x 1.2 x 2.7 m)	6' (1.83 m) 4' x 4' x 9' (1.2 x 1.2 x 2.7 m)	6' (1.83 m) 4' x 4' x 9' (1.2 x 1.2 x 2.7 m)
Twine Sickle [™] , Discharge End Curtains, Top and Rear Deflectors	Standard	Standard	Standard	Standard
2 Hydraulic Remote	Option	Option	Option	Option

^{*} FC - Feed Chopper

All weights and transport dimensions are estimates and are subject to change.

While every effort has been made to ensure that the information is accurate/current at the time of production, all specifications are subject to change.

^{**} Grain Tank capacity - 45 bushels (1587 L)

^{***} Right/left hand is determined by sitting in the tractor seat looking forward.

If livestock is being fed, it is the operator's responsibility to ensure that the materials in the processed feed mix are suitable. Some of the wrapping material (twine, net wrap or other materials) may be discharged with the feed if the wrapping materials are not removed prior to processing.

For the latest product information, please visit: www.highlinemfg.com.

the Bale Pro® MODULAR SYSTEM

The Bale Pro® modular system adds flexibility to your Bale Pro® system allowing you to add components as your operation requirements shift.

THE Base Bale Pro

Highline® Bale Pros® aggressively spin and loosen the bale for uniform feeding into the flail processing chamber, allowing for range or bunk feeding.

Feed Chopper

The Highline® Feed Chopper™ is a secondary processing option that allows you to produce a consistent, shorter cut length; the shorter cut length creates a more consistent feed output and gets rid of long stems.

3

Grain Tank

The hydraulically driven Grain Tank boasts a 45 bushel (1587 I) tank.


The grain is inserted, rather than dropped onto the forage resulting in an evenly mixed feed ration.





How the BP System Impacts the Bottom Line - Analyze The Numbers
The Bale Pro® System:

- Reduces the labor requirements to provide proper nutrition. This provides the greatest benefits at calving season—no chop pails or rolled grain wagons, no necessity for 2 operators and 2 tractors.
- Eliminates the cost to own or rent a tub grinder.
- Eliminates waste from spoilage of batch processing.
- Ability to run bedding through the Feed Chopper[™] increases absorption in various indoor applications.

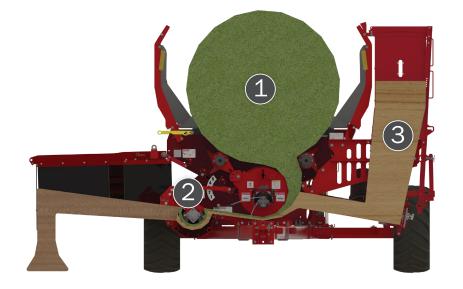

*looking from the front of the Bale Pro®

- 1 The bale is processed.
- 2 The Feed Chopper™ slices processed forage, cracks grain and blends the mix into a ration.
- 3 Metered grain is inserted into the feed stream.



the BASE BALE PRO®

BP 660 / BP 661 / BP 663 TOP GUN® / BP 965



Highline's Bale Pros® chop and mix round or square bales (model dependent), reducing sorting and waste.

The Bale Pro® advantages:



Discharge Door

Accommodate a wide range of bunks or windrowing with this lengthened, one piece discharge door.



Extremely Durable Construction

The durable, 6 X 4 A-Frame design and continuous tube structure of all Bale Pros® handles heavy loads.

The continuous frame member eliminates weld stress points when operating in harsh environments.



2 Stage Bale Lift

The 2 stage vertical lift reduces the bale being lifted from "scrubbing" on the bales in the bale stack, as well as eliminates the need to clutch the tractor between bales.

the BASE BALE PRO®

Adjustable Forks

Lift bales from the smallest silage up

to 6' (1.83 m). Lift from the row and

load them into the Bale Pro®.

BP 660 / BP 661 / BP 663 TOP GUN® / BP 965

Rear Deflectors

Standard on all models.

Hi-Flotation Tires

Each Bale Pro® model is designed with appropriately sized hi-flotation tires allowing for easy maneuverability through challenging terrain.

Adjustable Axles

Adjust to a wide stance in uneven terrain for stability, or adjust to a narrow stance for passing through gates and narrow barn doors.





The Axle Twine Guard eliminates the nuisance of twine getting tightly wrapped around the wheel axle.


Fork Length

Fork length of 67 ½" (1.71 m) for full bale engagement.

Vertical Bale Lift

The Bale Pro® vertical bale lift has the highest breakout force of any bale processor on the market today. This force allows you to easily remove bales that are frozen to the ground. Vertical lift reduces the bale being lifted from "scrubbing" on the bales in the bale stack, as well as eliminates the need to clutch the tractor between bales.

The vertical bale lift is a 2 stage lift system where the first stage of the process lifts the bale straight off of the ground. Little space is required to accommodate this design. The competitors lack the 2 stage system. On competitors' systems, the bale rotation into the tub is started immediately resulting in limited force, as well as the need to pull ahead when loading a bale from a stack.

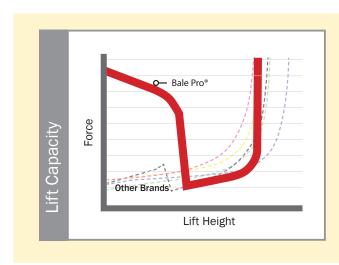

STAGE 1

STAGE 2







41



1 the BASE BALE PRO®

BP 660 / BP 661 / BP 663 TOP GUN® / BP 965



The image above shows what happens when feed is not placed in a windrow. Instead of standing and eating, the cattle wander around trampling and vasting valuable feed, s well as consuming additional energy.

Hydraulic Discharge Door.

The hydraulically operated discharge door "contains" the outputted material in a high, uniform mound. This high mound reduces the amount of sorting the cattle will do, and also deters excess walking and wasting of valuable energy.








Feeding in the Field.

Feeding cattle in a bunk or a windrow in the field reduces corral cleaning costs in spring; as well, the nutrients from the manure benefit the field biology.

Bedding Profiles of Highline Bale Pros®

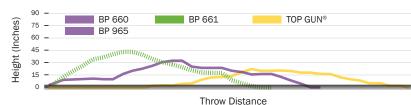

The graph on the left represents the bedding profiles of each of the different Highline® Bale Pros® in ideal conditions (reaching maximum height and distance). The results were taken while each Bale Pro® was stationary with each Bale Pro® processing one complete round bale. (While feed and weather conditions can alter these measurements, the general pattern of each Bale Pro® remains consistent.)

• Efficient Processing

The Bale Pro[®] allows you to do double-duty; process one bale while carrying another on the forks. This saves time by allowing for continued operation before having to load again. Loading bales is a simple one person operation from the comfort of the tractor cab.

• Even Bedding

Create an even and lofty spread using a Highline® Bale Pro®. Quality bedding is produced while using less straw, saving on input costs.

2

the FEED CHOPPER™





Feed Chopper™ Blades

The Feed Chopper™ is designed with 128 blades spinning at 3,000 rpm to provide a uniform blend of shorter cut lengths of roughage. The blades are sharpened on both sides; if a blade is worn out or damaged, simply flip the blade over for a sharpened edge.

Spring Tensioner

The spring tensioner has a wide setting range and this ensures adequate tension on the belt throughout its life. It is a maintenance free design, simply check the tension sight window to verify it's within operating conditions and go!

Additional Benefits

Finished feeding and need to bed? The Feed Chopper™ can be easily disengaged and your throw profile adjusted by simply removing the 2 hair pins on either side of the Feed Chopper™ and adjusting the angle of the deflector pan for bedding purposes.

BP 660 / BP 661 / BP 965

The Feed Chopper™

The Feed Chopper[™], exclusively from Highline[®], is a secondary processing option to create shorter cut lengths. Rather than stationary knives that pulverize or drag leaves off of stems, the Highline[®] Feed Chopper[™] truly slices through the hay creating an optimal consistency. The Feed Chopper[™] is a great alternative to tub grinders.

▶ Improves Whole Plant Intake

Chopping reduces particle size of the whole plant improving intake of the stem portion. This is the part cows and sheep sort against. The efficiency of forage utilization improves, reducing the amount of forages for winter feeding the herd.

Reduces Waste While Increasing Palatability

Cattle have preferences in what they eat. For example, longer coarse feed and low quality hay may have adequate nutritional value, but are not eaten, creating feed waste. By chopping low quality hay, intake of feed is increased, cattle will clean up the windrow or feed bunks.

Minimizes Sorting

Consistent shorter cut length hay from the Feed
Chopper™ ensures cattle do not sort different
length material or grain. Now full feed utilization can
occur while the cattle are eating the intended rations.

Flexibility of Feed Types

The Highline® Feed Chopper™ excels at cutting a wide range of bales including silage, corn or old straw bales. Feed sources can include: Corn Stover, Canola Straw, Green Feed, Alfalfa and Silage Bales, processed to an appropriate blend of cut lengths.

The Feed Chopper™ can be added as a field installed option to the BP 660, BP 661 and BP 965 Bale Pros®.

3 the GRAIN TANK

The Grain Tank is a variable speed hydraulic drive feed system that allows for even and consistent flow.

Unique to bale processing, the Highline® metering system ensures uniform mixes each and every time...regardless of feed conditions! Even distribution of grain or pellets within the hay is critical to ensure a good combined feed mix. Because cattle prefer grain to hay, they will sort out the grain and leave the hay if possible. The hydraulic drive feed system inserts the grain directly into the hay stream (as opposed to placing it on top) ensuring an optimal mix. Feeding grain is critically important to cattle in cold weather, backgrounding and during the final stages of gestation. Proper nutrition is required if the cattle body condition is to be maintained which relates directly to healthy calving and desired weight gains.

Auger

Hydraulic motor with ample power along with a proportional valve for precise rate control.



Axle

The speed sensor offsets in the rim keeping it away from mud & twine.





Hydraulic Drive Feed System

With no complex driveline, evenly distribute your grain or pellets.

BP 660 / BP 661 / BP 965

Grain Tank Features

Controlling Rations

It is vital to ensure that the amount of grain added into a ration is controlled. The amount of grain components in the ration needs to match up with the rumen's ability to utilize the grains. Increasing the grain components too quickly can result in acidosis and the animals going off feed. The Highline® hydraulic drive feed system precisely distributes the grain or pellets into the hay or straw windrow.

The hydraulic drive feed system now allows for stationary processing with precise grain addition – perfect for pre-processing for wagon or mixer feeding!



Control System Display

Easily set your rate for any feeding scenario. Enter the output you want, the calibration value, and start feeding.



Variable Speed Hydraulic Drive

Hydraulically driven metering can be instantly adjusted from the cab – no more distance meter or changing sprockets.



Gauge Windo

Easily view current grain levels through multiple gauge windows and confirm with the weight estimate on the display.



Electrical Ground Speed Sensing

No more complex auger driveline. Ground speed is determined from a speed sensor on the axle.



Tank Lid & Ladde

Large, 45 bushel (1587 L) tank with remote opener and a flipdown ladder to easily access the large 2' x 6' (.61 x 1.83 m) tank opening.

The Grain Tank can be added as a field installed option to the BP 660, BP 661 and BP 965 Bale Pros®.

TMR MIXER

models



Perfect for the smaller to mid-size farm

AMX 520T Mixer



Low profile loading height

AMX 690T Mixer

4 MODELS - one to meet your needs.

Highline® Manufacturing is focused on ensuring the equipment we offer is part of a complete solution to feeding livestock in the most efficient and effective way possible.



Simple. Reliable. Cost Effective

AMX 850T Mixer




Allows one operator to perform all cattle feeding with a single machine

AMX 1000S Mixer

PAGE 50 PAGE 54 PAGE 58 PAGE 62

49

4 TMR MIXER MODELS

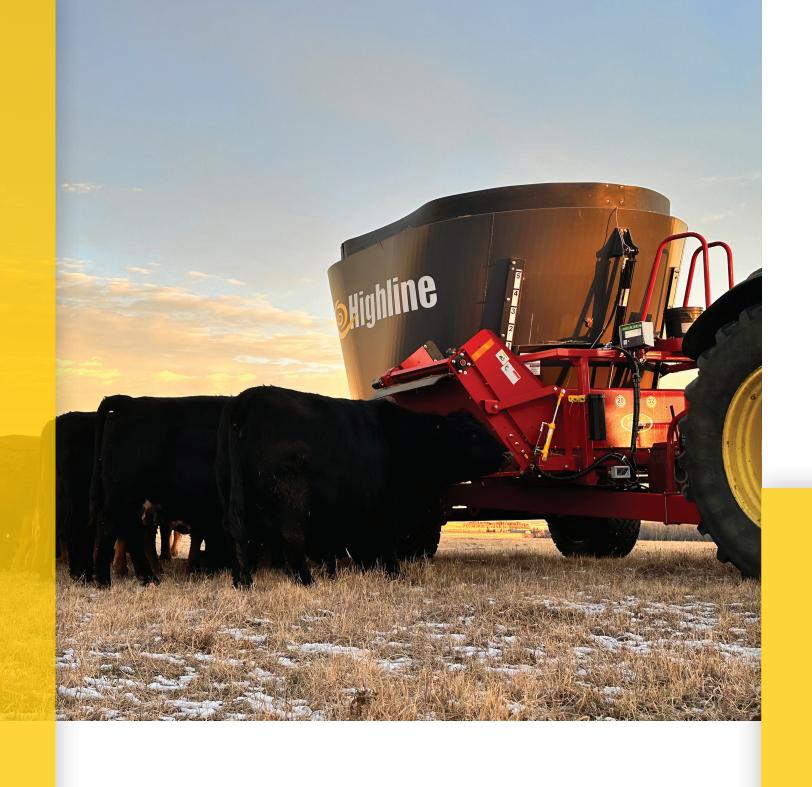

EASY to operate

The AMX 520T single screw mixer is perfect for the smaller to mid-size farm! With features like a wide 58" door and three conveyor options offered, this compact mixer would be an essential part of your feeding program.



51

XIM TOCS XM

AMX 520T Features



AMX 520T SPECIFICATIONS

J	Ų	I	U)	
		۰			

Tub Capacity / with 10" extension	451 ft ³ (12.7 m ³) / 520 ft ³ (14.7 m ³)				
Number of Screws	1				
Screw Speed	39 rpm @ 1000 PTO				
Screw Thickness and Material	5⁄8" (15.9 mm) Steel				
Tub Wall Thickness and Material	1/4" (6.4 mm) AR200 Steel				
Tub Floor Thickness and Material	³¼" (19 mm) Steel				
Aggression Plates	Yes				
Weigh System	4 Point Weighing System				
Unloading					
Conveyors	Chain with Steel Slats				
Unload Height Flat	32" (813 mm)				
Unload Height Dogleg	46" (1168 mm)				
Unload Height Hydraulic	32" - 56" (813 mm - 1422 mm)				
Unload Door Width	58" (1473 mm)				

Hay Ring (Optional)



Drivetrain

PTO Minimum HP	100 hp (75 kW)
PTO Drive	1 %" PTO Yoke, Cat 6 PTO, Shear Protection, 1000 rpm
Tires	Two 445/50-22.5
Suspension	Single Axle, HD 10 Bolt Hubs
Dimensions and Weight	

Dimensions and weight

Unloaded Weight	10600 lb (4818 kg)					
Max Payload	10040 lb at 20 mph (6382 kg at 32 kph)					
Length	227" (5.77 m)					
Height - Standard	117" (2.97 m)					
Height - With 10" Extension	127" (3.23 m)					
Width - Flat Conveyor	109" (2.77 m)					
Wheel Track Width	100" (2.54 m)					

All weights and transport dimensions are estimates and are subject to change. While every effort has been made to ensure that the information is accurate/current at the time of production, all specifications are subject to change.

If livestock is being fed, it is the operator's responsibility to ensure that the materials in the processed feed mix are suitable. Some of the wrapping material (twine, net wrap or other materials) may be discharged with the feed if the wrapping materials are not removed prior to processing.

For the latest product information, please visit: www.highlinemfg.com.



LOW profile

The AMX 690T has a low profile loading height making it easier to load materials into the mixer. The low profile gives you the ability to easily maneuver through low barn door openings.



55

AMX 690T Features

Twin Vertical Mixing Screws

Each screw comes standard with 10 knives installed.

Dividers

Prominent dividers in the tub means minimal mixing dead spots with exceptional clean out.

Hubs

Heavy duty 10 bolt hubs.

Axle and Tires

Single axle and high flotation tires (445/50R-22.5) are standard equipment to meet the extremes of North American weather. A tandem walking axle option is available.

Load Cell Configuration

Four load cells that measure the tub and conveyor to provide accurate measurements.

fast and even feed delivery. The larger door means fewer tractor stops and an

wide front unload door for

An industry leading 58"

Unload Door

2 speed Gear Box (optional)

optimal clean out.

Manual shift or Power shift.



Conveyors •

Aggression Plates

To aid in a shorter cut length of material.

Three different conveyor options available to meet your needs -

Hydraulic Fold, Dogleg and Flat.



AMX 690T SPECIFICATIONS

ıb

Tub Capacity / with 6" extension	625 ft ³ (17.7 m ³) / 692 ft ³ (19.5 m ³)				
Number of Screws	2				
Screw Speed	33 rpm @ 1000 PTO				
Screw Thickness and Material	5⁄8" (15.9 mm) Steel				
Tub Wall Thickness and Material	1/4" (6.4 mm) AR200 Steel				
Tub Floor Thickness and Material	%" (15.9 mm) Steel				
Aggression Plates	Yes				
Weigh System	4 Point Weighing System				
Unloading					
Conveyors	Chain with Steel Slats				
Unload Height Flat	34" (864 mm)				
Unload Height Dogleg	48" (1220 mm)				
Unload Height Hydraulic	34" - 58" (864 mm - 1473 mm)				
Unload Door Width	58" (1473 mm)				

Hay Ring (Optional)



Drivetrain

PTO Minimum HP	120 hp (90 kW)				
PTO Drive	1 %" PTO Yoke, Cat 6 PTO, Shear Protection, 1000 rpm				
Tires - Single Axle	Two 445/50-22.5				
Tires - Tandem Axle	Four 550/45-22.5 20 ply				
Suspension	Single Axle, HD 10 Bolt Hubs or Tandem Walking Beam				
Dimensions and We	eight				
11 - 1 1 1 NAZ - 1 1	40000 11: (7500 1 -:)				

Max Payload - Single or Tandem 19000 lb at 20 mph (8618 kg at 32 kph) Length 316" (8.03 m) Height - Standard 103" (2.62 m) Height - With 6" Extension 109" (2.77 m) Width - Flat Conveyor 109" (2.77 m) Wheel Track Width 102" (2.59 m)	Unloaded Weight	16680 lb (7582 kg) 19000 lb at 20 mph (8618 kg at 32 kph)				
Height - Standard 103" (2.62 m) Height - With 6" Extension 109" (2.77 m) Width - Flat Conveyor 109" (2.77 m)	Max Payload - Single or Tandem					
Height - With 6" Extension 109" (2.77 m) Width - Flat Conveyor 109" (2.77 m)	Length	316" (8.03 m)				
Width - Flat Conveyor 109" (2.77 m)	Height - Standard	103" (2.62 m)				
	Height - With 6" Extension	109" (2.77 m)				
Wheel Track Width 102" (2.59 m)	Width - Flat Conveyor	109" (2.77 m)				
	Wheel Track Width	102" (2.59 m)				

All weights and transport dimensions are estimates and are subject to change. While every effort has been made to ensure that the information is accurate/current at the time of production, all specifications are subject to change.

If livestock is being fed, it is the operator's responsibility to ensure that the materials in the processed feed mix are suitable. Some of the wrapping material (twine, net wrap or other materials) may be discharged with the feed if the wrapping materials are not removed prior to processing.

For the latest product information, please visit: www.highlinemfg.com.



SIMPLE. RELIABLE.

and cost effective

Highline® Manufacturing is focused on ensuring the equipment we offer is part of a complete solution to feeding livestock in the most efficient and effective way possible. The AccuMix™ AMX 850T towed feed mixer is another tool in our lineup that is simple, reliable and cost effective.



AMX 850T Features



AMX 850T SPECIFICATIONS

58" (1473 mm)

								٠												
ty/	w	itŀ	1	1()"	•	e	X.	te	r	19	Sİ	0	r	1					
Scr	ew	s					۰	۰				٠				٠		٠	۰	۰
							۰	۰			0	٠			۰	۰	0	٠	۰	۰

Tub Capacity 745 ft³ (21 m³) / 850 ft³ (24 m³) Number of S **Screw Speed** 33 rpm @ 1000 PTO **Screw Thickness and Material** 5/8" (15.9 mm) Steel **Tub Wall Thickness and Material** 1/4" (6.4 mm) AR200 Steel **Tub Floor Thickness and Material** 3/4" (19 mm) Steel **Aggression Plates** 4 Point Weighing System **Weigh System**

Unloading

Tub

Chain with Steel Slats Conveyors **Unload Height Flat** 36" (914 mm) **Unload Height Dogleg** 50" (1270 mm) **Unload Height Hydraulic** 36" - 60" (914 m - 1524 mm)

Hay Ring (Optional)

Unload Door Width



Drivetrain

PTO Minimum HP	150 hp (112 kW)				
PTO Drive	1 3%" PTO Yoke, Cat 6 PTO, Shear Protection, 1000 rpm				
Tires - Single Axle	Two 445/50-22.5				
Tires - Tandem Axle	Four 550/45-22.5 20 ply				
Suspension	Single Axle, HD 10 Bolt Hubs or Tandem Walking				


imensions and Weight	
nloaded Weight	20200 lb (9182 kg)
ax Payload - Single Axle	17000 lb at 20 mph (7711 kg at 32 kph)
	24000 lb at 7 mph (10886 kg at 11 kph)
ax Payload - Tandem Axle	24000 lb at 20 mph (10886 kg at 32 kph)
ength	316" (8.03 m)
eight - Standard	114" (2.90 m)
eight - With 10" Extension	124" (3.15 m)
idth - Flat Conveyor	109" (2.77 m)
heel Track Width	107" (2.72 m)

All weights and transport dimensions are estimates and are subject to change. While every effort has been made to ensure that the information is accurate/current at the time of production, all specifications are subject to change.

If livestock is being fed, it is the operator's responsibility to ensure that the materials in the processed feed mix are suitable. Some of the wrapping material (twine, net wrap or other materials) may be discharged with the feed if the wrapping materials are not removed prior to processing.

For the latest product information, please visit: www.highlinemfg.com

61

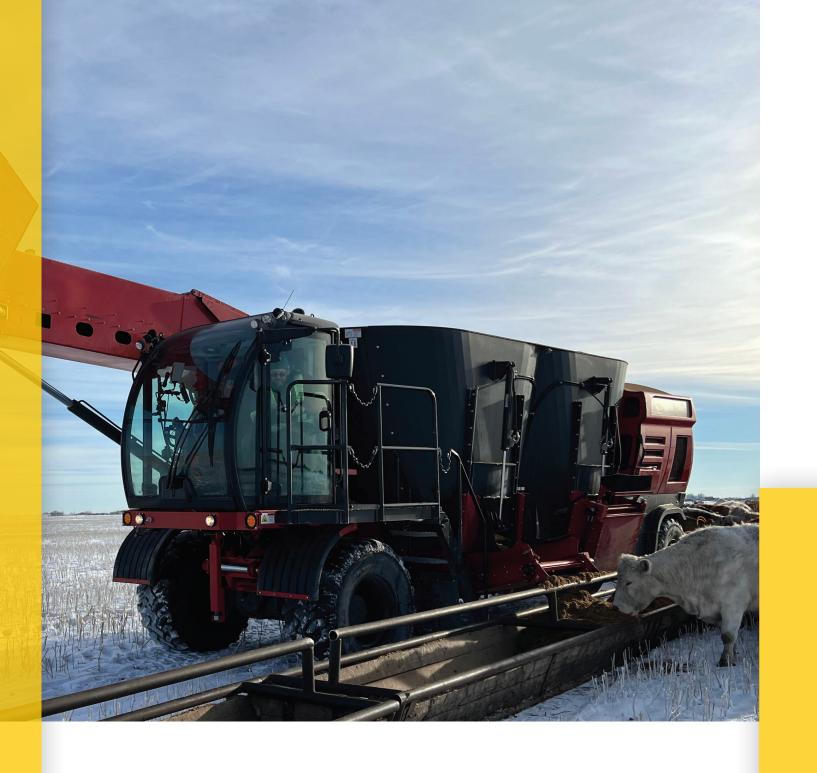

TOUGH. ACCURATE.

and reliable

The AccuMix[™] model AMX 1000S Self Loading Self Propelled Feed Mixer allows one operator to perform all cattle feeding with a single machine, without leaving the seat. It is the only North American designed and manufactured machine of its kind.



AMX 1000s Features The Loading Arm Engine • The self-loading arm option The Cummins B6.7 six allows for a single operator cylinder diesel engine to do all the feeding with

industry. Sliding rear engine cover provides quick and easy hassle-free access for

service.

delivers 310 HP, offering



the highest torque in the

Hydraulics

one machine.

Highline® uses proven brand name hydraulic pumps, motors and valves for ultimate reliability.

Drive

Built for Here™, the AMX 1000S boasts aggressive high-flotation tires, fully hydrostatic AWD, leaf-spring suspension for a comfortable ride, three steering modes for easy maneuvering, and two operating modes - work and travel.



Tub

The mixing tub contains two hydraulically driven vertical screws, with three user-customized speeds, from 1-50 rpm.



Controls

view!

Touchscreen display and ergonomic joystick allows the operator to easily control the functions of the machine.



The stairs extend out when the park brake is applied and fold away when brake is disengaged. This feature allows for improved access and safety to the cab area, in addition to narrower machine width.







AMX 1000S SPECIFICATIONS

Tub	
Tub Capacity	1000 ft³ (28.3 m³)
Screw Speed	3 Adjustable Presets, Range 1-50 rpr
Screw Thickness and Material	5⁄8" (15.9 mm) 44W Steel
Tub Wall Thickness and Material	½" (6.4 mm) AR200 Steel
Tub Floor Thickness and Materia	l 3/4" (19 mm) 44W Steel
Engine	
Engine	Cummins B6.7 Six Cylinder Diesel - Tier 4 Fin
Engine Power	310 HP (232 kW)
Loading Arm	
Milling Head Power	150 HP (112 kW)
Milling Head Speed	Variable 0-600 rpm
Milling Head Width	92" (2.34 m)
Max. Load Height	260" (6.6 m)
Unloading	
Conveyors	Chain with Steel Slats
Positions - Standard	Standard front LHS conveyor OR drop-chur
Positions - Optional	Optional rear conveyor OR drop-chute (LHS or RHS
Maximum Feedout Height	42" (1.06 m)
Cab and Cooling Features	5
Engine Cooler	Flexxaire Auto Reversing Fan
Hydraulic Cooler	Hydac Cooler with Auto Reversing Fa
Cameras	Back up, Tub and Right Side View (Optional 360° Birds-eye Vie
Mirrors	Heated and Motorized

Seat	Adjustable Air-ride				
Climate Aut	o Heat, A/C and Diesel Cab Heater with Auto-start Timer)				
Electrical System	12V				
Drivetrain					
Drive Modes	Work (4 Adjustable Speed Ranges - max 25 km/h) and Travel (max 40 km/h)				
Speed Ranges	4 in Work Mode				
Max. Speed	25 mph (40 km/h)				
Transmission	Full Hydrostatic (AWD)				
Tires	600/55R26.5 - 70 psi (483 kpa)				
Suspension	Mechanical - Leaf Springs & Stabilizer Bars				
Steering	Front, Circle and Crab				
Dimensions and Weight					
Unloaded Weight with Arm	46000 lb (20909 kg)				
Unloaded Weight without Arm	40000 lb (18182 kg)				
Max Payload	26000 lb (11793 kg)				
Length - With Loading Arm	478" (12.14 m)				
Length - Without Loading Arm	380" (9.65 m)				
Height - Top of Cab Antenna	137" (3.47 m)				
Width - LHS Conveyor Only (Up/Down)	132" (3.35 m) / 141" (3.58 m)				
Width - Conveyor both sides (Up/Down)	138" (3.50 m) / 171" (4.34 m)				
Width - LHS Drop Chute Only (Up/Down)	126" (3.20 m) / 126" (3.20 m)				
Width - Drop Chute Both Sides (Up/Down)	127" (3.22 m) / 133" (3.37 m)				
Wheel Base	275" (6.99 m)				
Ground Clearance	19" (.48 m)				

YOUR LOCAL PROFESSION	NAL HIGHLINE DEALER:	
		Printed in Canada - 04.24



Highway #27, PO Box 307 Vonda, SK, Canada SOK 4N0

www.highlinemfg.com






OUR MISSION

Our mission is to design, manufacture and distribute the highest quality, most durable and reliable farm equipment in the world, which is affordable and meets or exceeds the expectations of our most demanding customers.

Highline Manufacturing is a division of Bourgault Industries Ltd. and as such shares a common standard of "pursuing perfection" in their business approach. Highline's shared approach is to develop relevant products of the highest quality that exceed the expectations of our most discerning customers.





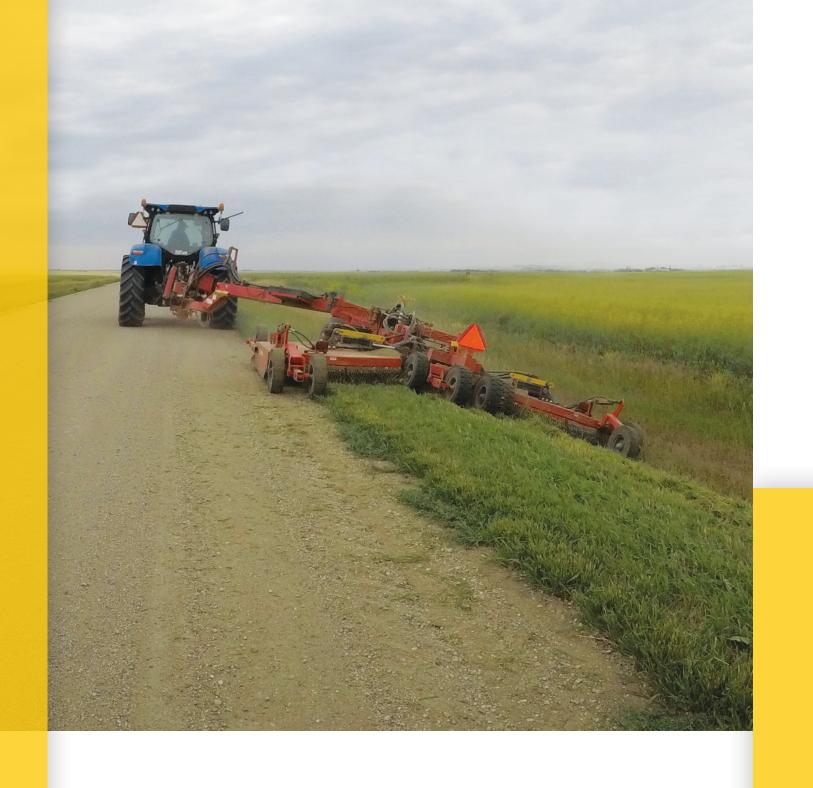

THE RCH™ HYDRO


within ReaCH

The next generation of the RCH™ Hydro Mower is compact with exceptional maneuverability.

The unique hydraulic drive system provides the benefits of minimal maintenance and extended blade life which both increase your daily cutting time. Just ask one of our current operators!



An industry exclusive feature of a Highline[®] mower is the integrated Radial Contouring Hitch (RCH[™]). The RCH[™] is designed to keep the tractor on the road and the Operator safe while achieving a quality cut.



Versatility - Mow on Both Sides of the Road Without Switching Configurations

Mow to the left or the right, or behind on flat areas. The mower can ReaCH either side without requiring a configuration change. The mower can be easily manipulated for backing up and turning around in tight spaces.



Independent Wing Lift

Mow in areas that are restricted for space by lifting each wing independently.

The ability to turn off the deck motors and lift the wings independently is exclusive to a hydraulic mower.




Save **TIME** and **INCREASE** Productivity.

Greasing and maintenance have always been time consuming and cumbersome tasks. Care and greasing on traditional, mechanically-driven ditch mowers can take from 30 minutes up to an hour of preparation time every day! With the RCH™ Hydro Mower greasing and maintenance takes approximately 10 minutes.

In a mowing season of 100 days this translates into an extra 100 miles (160 kms) of mowing!

Gradient Steering

The gradient steering, available on the RCH™ Hydro Mower, in steep application minimizes side drag on tractor and excessive tractor tire wear

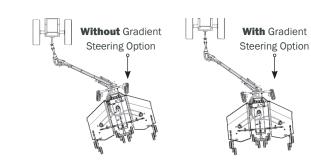


In this illustration the front wheels are free to caster and the mower is skewed noticeably.

In this illustration, the front wheels are steering the mower up the ditch, so the skew is reduced.





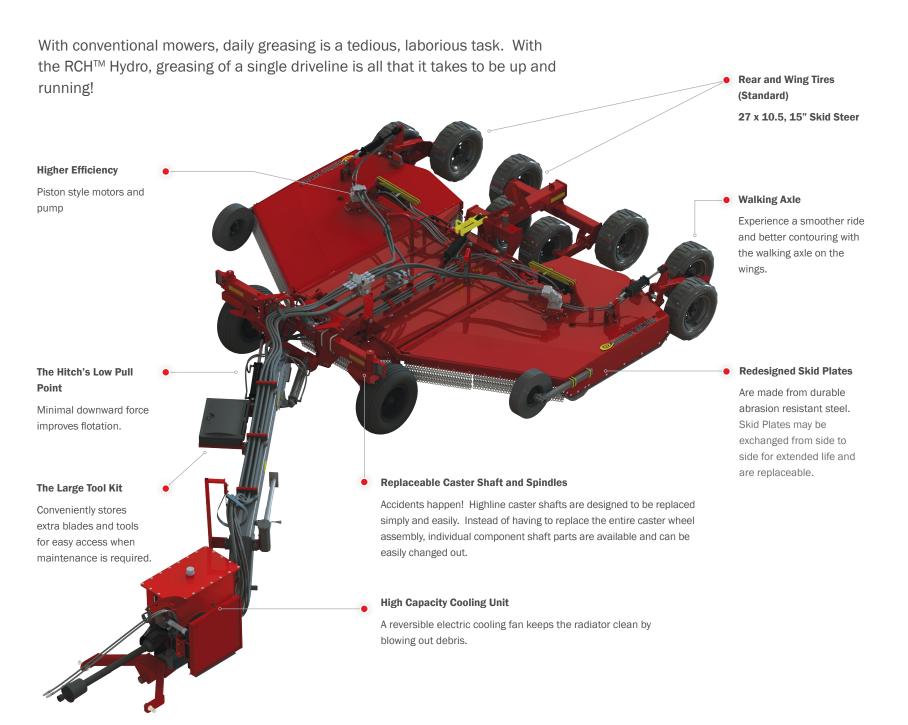



The RCH™ HYDRO MOWER



THE OPTIONAL JOYSTICK

IS SIMPLY MORE INSTINCTIVE!

With all hydraulic functions on one control, the Operator can easily operate the RCH™ Hydro Mower with minimum effort. Operators are raving about the ease of use the joystick provides.



LARGE, SMOOTH

UNDERSIDE SHREDS MULCH.

A depth of 11" from the underside of the deck to the blade allows for a larger volume of material to be mulched, resulting in a better cut.

The deck protection rings protect the underdecks from damage due to the rotary blade, flying rocks, or debris.

THE HYDRAULIC DRIVE ADVANTAGE



The hydraulic drive advantage translates into less time doing maintenance and more time operating! This is because the hydraulic drive system eliminates a number of moving parts including slip clutches which can wear over time reducing overall performance. Also, when a mower blade hits an obstacle, the hydraulic pressure is relieved, reducing force being applied on the blade and potential damage.

The hydraulic drive system reduces the number of PTO drive shafts which means less time greasing.

11



RCH 415 SPECIFICATIONS

Cutting Swath	180" (4.57 m)
Cutting Capacity	3 ½" (89 mm)
Cutting Height 2	" to 15" (51 mm to 381 mm)
Overall Width (to outside of wings lowered)	196" (4.98 m)
Overall Length	392" (10 m)
Transport Width	120" (3.05 m)
Weight	9735 lb (4416 kg)
Blade Size	½" x 4" (13 mm x 102 mm)
Wing Working Range	25° Down, 55° Up
Double Safety Chains All Round	Standard
Minimum	140 hp (104 kW)
Recommended HP	

Deck Thickness	$^{3}\!\!/_{16}$ " High Impact Resistant
Blade Tip Speed	15250 FPM (4650 mpm)
Standard Front Tires	32 x 11.5 x 15 22 Ply
Rear Tires (Wing)	27 x 10.5, 15" Skid Steer (Standard)
Rear Tires (Center)	27 x 10.5, 15" Skid Steer (Standard)
Hydraulic Fluid	AW68
Oil Capacity	20 Imp Gal (94 L)
Deck to Blade Clearance	11" (279 mm)
Tongue Weight	1275 lb (578 kg)
Driveline	Cat 4 1000 PTO -1 3/8" 21 Spine

While every effort has been made to ensure that the information is accurate/current at the time of production, all specifications are subject to change.

For the latest product information, please visit: www.highlinemfg.com.

13













YOUR LOCAL PROFESSIONAL HIGHLINE DEALER:	
	Printed in Canada - 09.22



Highway #27, PO Box 307 Vonda, SK, Canada SOK 4N0

www.highlinemfg.com



Mapleside

SKIDSTEER & TRACTOR ATTACHMENTS

BUCKETS | BOX BLADES | BALE SPEARS | PALLET FORKS | MANURE FORKS







BUCKETS





Standard Profile Bucket

Product ID	Standard Features	Optional
72SPB	• 6"x5/8" HARDENED STEEL	
78SPB	CUTTING EDGE	 DIGGING TEETH
84SPB		BOLT-ON CUTTING
90SPB	PRE DRILLED HOLES FOR OPTIONAL CUTTING FDGE	EDGE
96SPB	CUTTING EDGE	

AVAILABLE IN SKID STEER, EURO & JDQA



H.D Back Grill Bucket

Product ID	Standard Features	Optional
HD72BGB	• 6"x3/4" HARDENED STEEL	
HD78BGB	CUTTING EDGE	 DIGGING TEETH
HD84BGB	• 21.5" HIGH AND 33" DEEP	BOLT-ON CUTTING
HD90BGB	PRE DRILLED HOLES FOR OPTIONAL	EDGE
HD96BGB	CUTTING EDGE	

AVAILABLE IN SKID STEER & EURO QUICK ATTACH



Low Profile Bucket

Product ID	Standard Features	Optional
66LPB	• 6"x5/8" HARDENED STEEL	
72LPB	CUTTING EDGE	DIGGING TEETH
78LPB		
84LPB	• 18" HIGH AND 36" DEEP	BOLT-ON CUTTING
90LPB	PRE DRILLED HOLES FOR OPTIONAL	EDGE
96LPB	CUTTING EDGE	

AVAILABLE IN SKID STEER, EURO & JDQA



Reg. Duty Back Grill Bucket

Product ID	Standard Features	Optional
72BGB	• 6"x5/8" HARDENED STEEL	
78BGB	CUTTING EDGE	 DIGGING TEETH
84BGB	• 21.5" HIGH AND 33" DEEP	BOLT-ON CUTTING
90BGB	PRE DRILLED HOLES FOR OPTIONAL	EDGE
96BGB	CUTTING EDGE	

AVAILABLE IN SKID STEER & EURO QUICK ATTACH



High Dump Bucket

	-
Product ID	Standard Features
HDB86	
HDB92	6"x5/8" HARDENED STEEL CUTTING EDGE
HDB98	HYDRAULIC CYLINDERS FOR DUMPING AT INCREASED HEIGHT
HDB104	
HDB110	

AVAILABLE IN SKID STEER QUICK ATTACH







High Volume Bucket

Product ID	Standard Features	Optional
HVB72		
HVB78		
HVB84	• 6"x5/8" HARDENED STEEL	
HVB90	CUTTING EDGE	
HVB96	• 34.5" HIGH AND 48" DEEP	BOLT-ON CUTTING
HVB102	PRE DRILLED HOLES FOR OPTIONAL	EDGE
HVB108	CUTTING EDGE	
HVB120		
HVB144		

AVAILABLE IN SKID STEER & EURO QUICK ATTACH



Rock Bucket

Product ID	Standard Features
RBSQA	• 20" HIGH 40" DEEP
RBEQA	VERTICAL SHEET METAL TINES FOR ADDED STRENGTH
RBJDQA	• 2.5" BETWEEN TINES
AVA	ILARIE IN SKID STEER FIIRO & IDOA



High Volume High Dump Bucket

0	U
Product ID	Standard Features
HVHDB84	
HVHDB86	• 6"x5/8" HARDENED STEEL CUTTING EDGE
HVHDB96	HYDRAULIC CYLINDERS FOR DUMPING AT INCREASED HEIGHTS
	LARGER VOLUME FOR LESS LOADS



AVAILABLE IN SKID STEER & EURO QUICK ATTACH



3 Point Hitch Dump Boxes

Product ID	Standard Features
3X3DB3PH	ADD SPACE TO CARRY EXTRA CARGO AND AGGREGAT
4X4DB3PH	• EASY TO USE
	QUICK LATCH FOR EASY DUMPING

TREE PULLER

Tree Puller Stump Bucket

Tree Puller Stuffip Bucket			
	Product ID	Standard Features	
	TPSB	REPLACEABLE TEETH ON THE FRONT	
		SERRATED ARMS FOR MAXIMUM GRIP	
		STANDARD WITH BOLT ON OUTSIDE SERRATED PLATES	
		REMOVABLE PROTECTIVE BACK GRILL	
	A 1/ A /	I A DI E INI CVID STEED OILICV ATTACH	



BOX BLADE & GRADER BLADES





3 Point Hitch Box Blades

Product ID

Standard Features

BB3PH

- MULTIPLE SIZES FOR EVERY RATING OF TRACTOR
- TWO REVERSIBLE CUTTING EDGES
- CUTTING EDGE ON THE BACK FOR PUSHING APPLICATIONS



3 Point Hitch Grader Blades

Product ID Standard Features

3PHGB 3PHGBHD

- MULTIPLE SIZES FOR EVERY RATING OF TRACTOR
- REVERSABLE CUTTING EDGE
- ROTATING BLADE FOR PUSHING AND PULLING APPLICATIONS
- CYLINDER KIT AVAILABLE FOR THE HD GRADERS



3 Point Hitch Land Planes

Product ID

Standard Features

LP3PH

- MULTIPLE SIZES FOR EVERY RATING OF TRACTOR
- TWO REVERSABLE CUTTING EDGES
- ADJUSTABLE STEEL DIGGING SHANKS
- ADJUSTABLE HEIGHT HARDENED SKID SHOES

BRUSH GRAPPLE

H.D Brush Grapple

Product ID

Standard Features

80HDBG

- DOUBLE GRAPPLE FOR SECURE HANDLING.
- CYLINDER GUARDS TO PROTECT FROM DAMAGING THE CYLINDERS
- TOTAL WEIGHT OF 1050 LBS







BALE SPEARS





Single Prong Bale Spear

Product ID

Standard Features

SQASPBS

- CONUS 2 TINES
- COMPATIBLE WITH 39" OVERALL & 49" OVERALL TINES
- TWO STABALIZER TINES
- 45.25" WIDE FRAME
- FRAME IS 175 LBS

AVAILABLE IN SKID STEER QUICK ATTACH



Double Prong Bale Spear

Double Prong Bale Spear						
Product ID	Standard Features	Optional				
SQABSRD	 CONUS 2 TINES COMPATIBLE WITH 39" OVERALL & 49" OVERALL TINES 45.25" WIDE FRAME 30" CENTER TO CENTER BALE TINES FRAME IS 141 LBS 	DROP IN POSTS FOR CARRYING STACKED BALES				
	SKID STEER QUICK ATTACH					
SQASPBS	• CONUS 2 TINES					
EQABS	 COMPATIBLE WITH 39" OVERALL & 49" OVERALL TINES 30" CENTER TO CENTER BALE TINES 52" WIDE FRAME FRAME IS 198 LBS 	SIDE POSTS FOR CARRYING STACKED BALES				
AVAILABI	LE IN EURO & SKID STEER (QUICK ATTACH				
SQABSHDW	 CONUS 2 TINES COMPATIBLE WITH 39" OVERALL & 49" OVERALL TINES 41" CENTER TO CENTER BALE TINES 52" WIDE FRAME FRAME IS 198 LBS 	SIDE POSTS FOR CARRYING STACKED BALES				
SKID STEER QUICK ATTACH						





Tripple Prong Bale Spears

Product ID	Standard Features	Optional			
SQABSTP	CONUS 2 TINES				
	• COMPATIBLE WITH 39" OVERALL & 49" OVERALL TINES	BACK RACK FOR CARRYING			
	• 61.5" WIDE	STACKED BALES			
	• FRAME IS 243 LBS				
	SKID STEER QUICK ATTACH				
EQABSTP	CONUS 2 TINES				
	• COMPATIBLE WITH 39" OVERALL & 49" OVERALL TINES	BACK RACK FOR CARRYING			
	• 61.5" WIDE	STACKED BALES			
	• FRAME IS 243 LBS				



ROUND BALE UNROLLER BALE SQUEEZERS



Round Bale Unroller

Product ID

Standard Features

RBU3PH

- HANDLES BALES UP TO 6FT IN DIAMETER AND 5 FEET LONG
- UNROLLS UP TO 1500 LBS BALES
- TOTAL WEIGHT OF 335 LBS



Bale Squeezer

Product ID Standard Features BSSQA • TOTAL OPENING WIDTH OF 71" • GENTLE HANDLING OF WRAPPED BALES • TOTAL WEIGHT OF 580 LBS SKID STEER QUICK ATTACH BSEQA • TOTAL OPENING WIDTH OF 71" • GENTLE HANDLING OF WRAPPED BALES • TOTAL WEIGHT OF 580 LBS EURO QUICK ATTACH

SNOW BLADES





Angle Snow Blade

Product ID

Standard Features

HYDSQASB

- AVAILABLE IN 8' AND 10'
- MULTIPLE ATTACHMENT STYLES LARGER VOLUME FOR LESS LOADS
- TRIP EDGE TO PROTECT HYDRAULIC CYLINDERS
- REVERSABLE HARDEND CUTTING EDGE

AVAILABLE IN SKID STEER & EURO QUICK ATTACH



Snow Pusher

Product ID	Standard Features
6SP	MULTIPLE ATTACHMENT STYLES
8SP	ADJUSTABLE HARDENED SKID SHOES FOR ADJUSTING HEIGHTS
10SP	ADJUSTABLE MOUNTING PLATES FOR DIFFERENT HEIGHTS
12SP	AND ANGLES
	STANDARD WITH A BACK DRAG BLADE
AVALLAD	IE IN CUID CTEED & EUDO OUICE ATTACH

AVAILABLE IN SKID STEER & EURO QUICK ATTACH





PALLET FORKS





1200 lb Pallet Fork

Product ID

Standard Features

12SQAPF 12JDQAPF

- STANDARD 16" CARRAGE
- AVAILABLE WITH 42", 48", OR 54" FORKS
- FRAME WEIGHT OF 200 LBS
- 50.5" WIDE FRAME



5500 lb Pallet Fork

Product ID

55SQAPF 55JDQAPF 55EQAPF

Standard FeaturesSTANDARD 16" CARRAGE

- AVAILABLE WITH 42", 48", OR 54"
 FORKS
- FRAME WEIGHT OF 390 LBS
- 50.5" WIDE FRAME

Optional

 UPGRADED TOP AND BOTTOM FORK RAILS FOR EXTRA STRENGTH 55SQAPF-AR400



2000 lb Pallet Fork

Product ID

20SQAPF • STANDARD 16" CARRAGE

20JDQAPF 20EQAPF

- AVAILABLE WITH 42", 48", OR 54" FORKS
- FRAME WEIGHT OF 230 LBS
- 50.5" WIDE FRAME

Standard Features



Product ID Standard Features

LGFA

• AVAILABLE WITH 42", 48", OR 54" FORKS

- CYLINDER GUARD TO PROTECT FROM DAMAGING THE CYLINDER
- MOVE LOGS AND POSTS WITH EASE
- STANDARD 16" CARRAGE



MANURE FORK

ROTARY CUTTER



Manure Fork

Product ID

Standard Features

MFSQA MFEQA

- CONUS 1 SLEEVES
- 35" CRANKED CONUS 1 TINES
- TINES ARE SPACED 8" APART



Rotary Cutter

Product ID

Standard Features

72RCSS

- 3 SWINGING BLADES FOR A PERFECT CUT
- HARDENED SKID SHOES TO PREVENT DIGGING INTO THE GROUND



SKIDSTEER & TRACTOR ATTACHMENTS

VISIT WWW.MAPLESIDEMFG.CA FOR MORE PRODUCT INFORMATION

Mapleside Manufacturing is a Canadian producer of quality attachments for skidsteers and tractors. We offer a wide range of attachments including buckets, box blades, bale spears, pallet forks and manure forks. Our products are made with high quality steel and are powder coated to reduce the risk of rusting and chipping. We stand behind our products with a 2 year limited warranty.







john@maplesidemfg.ca 705.481.1378 www.maplesidemfg.ca Mapleside Manufacturing 793202 Grey Road 124 Creemore, Ontario, LOM 1G0



STRENGTH

DESIGN





INNOVATION



Feeding Range

MANUFACTURERS OF QUALITY MACHINERY ATTACHMENTS FOR AGRICULTURAL AND CONSTRUCTION SECTOR



Shear Genius









Shear Genius

The Prodig Shear Genius is the ultimate attachment for the farmer who diet feeds. This unit is a shear grab, bale splitter with plastic/net retainer and loading bucket all in one unit. This unit reduces feed waste by up to 15% and feeding time by up to 30%, making farmers more efficient, increasing profits.

- Available in widths from 1.5m to 2.5m.
- The ideal attachment for use in conjunction with a diet feeder wagon.
- Cuts clamp/pit silage, maize, whole crop, etc.
- Large capacity bucket for handling ration, concentrate, root crop etc.
- Wide opening shear to split round bales in half.
- Plastic film retainer to hold film and netting when splitting bales.
- Manufactured using Hardox plates and other high tensile steels.
- Hardened cutting edge and heat treated shear blades for superior cut and long life.
- Nickel chrome plated hydraulic rams for long life in an aggressive environment.

Shear GENIUS	GS 1500	GS 1800	GS 2200	GS 2500
Height (mm)	1046	1046	1046	1046
Width (mm)	1520	1820	2220	2520
Depth (mm)	1154	1154	1154	1154
Capacity (m³)	1.20	1.43	1.75	2.00
Weight (kg)	720	822	920	982
Rams	2x110mm Bore	2x110mm Bore	2x110mm Bore	2x110mm Bore
Opening hight (mm) Weight includes bolt on fram	1215	1215	1215	1215
Weight includes bolt on fran	ne for hitch. All of our a	attachments are design	ned to operate at 200) BAR hydraulic











Mega Bite

The Prodig Mega Bite is an all in one large capacity shear grab that can cut large blocks from the silage clamp/pit and split round bales while retaining the net and plastic. This unit reduces feeding time by up to 30%, making farmers more efficient and increasing profits.

- Large capacity grab in widths of 1.5m, 1.8m & 2.2m.
- The ideal attachment for use in conjunction with diet feeders.
- Cuts clamp/pit silage, maize, whole crop, etc.
- Wide opening shear to split round bales in half.
- Plastic film retainer to hold film and netting when splitting bales.
- 35mm Hardox tines use in fork base for extreme strength.
- Our full range of Hardox tines are manufactured incorporating a replaceable wear tip meaning the tine never has to be replaced
- Heat treated hardened shear blades for superior cut and long life.
- Nickel chrome plated hydraulic rams for long life in an aggressive environment

Mega Bite	MB 1500	MB 1800	MB2200	
Height (mm)	1044	1044	1044	
Width (mm)	1520	1820	2220	
Depth (mm)	1154	1154	1154	
Capacity (m³)	1.33	1.60	1.96	
Weight (kg)	691	780	885	
Number of tines	10 Hardox	12 Hardox	15 Hardox	
Tine spacing (mm)	121	121	121	
Tine Size(mm)	35 X 885	35 X 885	35 X 885	
Rams	2x110mm Bore	2x110mm Bore	2x110mm Bore	
Opening hight (mm)	1220	1220	1220	

All of our attachments are designed to operate at 200 BAR hydraulic pressure. Machines operating above 200 BAR will require a relief valve.













Pro Slice

Stemming from the success of the Shear Genius & Megabite combination units comes the Prodig Pro Slice. Designed and manufactured using Hardox & Domex plates, heat treated hardened cutting blades and bushed pivot points, this bale splitter will outlast any other on the market.

- Compatable with 1.2m (4ft) & 1.5m (5ft) bales of Silage, Hay & Straw
- Fitted with our reliable 6 claw Plastic/Net Gripper system.
- Fitted with five 985mm (39") Heavy Duty Stonefork tines with the option of two additional tines.
- Heat treated hardened cutting blades as standard for superior cut and long life.
- Manufactured using high strength Domex and Hardox steels.
- All pivot points fitted with replaceable, greaseable bushings.
- Nickel chrome plated hydraulic rams for long life in an aggressive environment.
- Bolt on hitch brackets to suit all machines.
- Optional pressure relief valve for machines in excess of 200 Bar hydraulic pressure.

Pro Slice
Height (mm) 1063
Width (mm) 1770
Depth (mm) 1120
Weight (kg) 452
Number of tines 5 Forged
Tine lenght(mm) 985
Rams 2x90mm Bore

All of our attachments are designed to operate at 200 BAR hydraulic pressure.

Machines operating above 200 BAR will require a relief valve.







Pro Shear

The Prodig Shear Grab is one of the strongest and most robust shear grabs on the market. It is manufactured with Hardox tines & heat treated hardened blades to reduce feed waste and down time due to breakages.

- Shear grabs available in widths from 1.3m to 2.2m.
- Fitted with 885mm Hardox tines.
- Our full range of Hardox tines are manufactured incorporating a replaceable wear tip meaning the tine never has to be replaced.
- · Heat treated hardened cutting blades as standard for superior cut and long life.
- Manufactured using high tensile Domex and hard wearing Hardox steels.
- All pivot points fitted with replaceable, greaseable bushings.
- Nickel chrome plated hydraulic rams for long life in an aggressive environment.
- · Bolt on hitch brackets to suit all machines.
- Optional pressure relief valve for machines in excess of 200 Bar hydraulic pressure.

Shear Grab	SG 1300 HX	SG 1500 HX	SG 1800 HX	SG 2200 HX				
Height (mm)	1034	1034	1034	1034				
Width (mm)	1320	1520	1820	2220				
Depth (mm)	1100	1100	1100	1100				
Capacity (m ³)	0.92	1.06	1.28	1.56				
Weight (kg)	561	603	687	793				
Number of tines	9 Hardox	10 Hardox	12 Hardox	15 Hardox				
Tine spacing (mm)	116	122	121	116				
Tine lenght(mm)	885	885	885	885				
Rams	2x90mm Bore	2x90mm Bore	2x100mm Bore	2x100mm Bore				
Opening hight(mm)	800	800	800	800				
All of our attachments are designed to operate at 200 BAR hydraulic pressure. Machines operating above 200 BAR will require a relief valve.								



Heavy Duty Shear Grab











Heavy Duty Shear Grab
The Prodig Heavy Duty Shear Grab is designed for wheeled loaders and large telehandlers where high volume feeding is required. The Heavy Duty Shear Grab is one of the strongest and most robust shear grabs on the market. It is manufactured with Hardox tines & heat treated hardened blades to reduce waste and down time due to breakages.

- Shear grabs available in widths from 2.2m to 2.75m.
- Manufactured with 40mm Hardox tines.
- Hardened cutting edge and heat treated shear blades for superior cut and long life.
- · High yeild steel used in fabricated bottom bar on fork.
- Nickel chrome plated hydraulic rams for long life in aggressive environment.
- · Bolt on hitch brackets to suit all machines.
- Optional pressure relief valve for machines in excess of 200 Bar hydraulic pressure.

		· ·	
Heavy Duty Shear Grab	HD-SG 2200	HD-SG 2500	HD-SG 2750
Height (mm)	1050	1050	1050
Width (mm)	2200	2500	2750
Depth (mm)	1150	1150	1150
Capacity (m ³)	2.0	2.2	2.5
Weight (kg)	1079	1175	1242
Number of tines	11 Hardox	13 Hardox	14 Hardox
Tine lenght(mm)	940	940	940
Rams	2x125mm Bore	2x125mm Bore	2x125mm Bore
Opening hight(mm)	1015	1015	1015
All of our attachments are	designed to oper	ate at 200 BAR	hydraulic pressure
Machines operating above	200 BAR will req	juire a relief val	ve.



Tractor Tine Grab









Tractor Tine Grab

Tractor Tine Grab

Tine lenght (mm)

Opening hight (mm)

Rams

The Prodig Tractor Tine Grab is an extremely versatile heavy applications, in the agri sector.

- Tractor tine grabs available in widths from 1.3m to 1.8m.
- · Ideal for efficient handling of silage, maize, manure, bales
- 25mm thick profiled Hardox tines on grapple and fork.
- Our Hardox tines are made incorporating a replaceable wear tip meaning the tine never has to be replaced.
- Engineered and fabricated bottom section for superior struc- construction. tural strength and rigidity.
- Twin double acting hydraulic rams mounted on the top of the 25mm thick profiled Hardox tines in fork for extreme strength.
- All moving parts fitted with greasing points.

680

795

2x 70mm

Telehandler Tine Grab

The Prodig Tele-Handler Tine Grab is an extremely versatile duty, robust attachment which can be used for a wide variety of heavy duty, robust attachment which can be used for a wide variety of applications, including agri, waste handling and industrial sectors.

- Tine grabs available in widths from 1.5m to 2.5m.
- Ideal for efficient handling of silage, maize, manure, bales etc.
- Wide opening grab for large items and cleaning up to walls.
- Heavy duty 8mm wall box section, and 10mm plate in grapple
- 25mm thick curved profiled Hardox tines on grapple.
- Heavy duty fork back with vision windows to view outer tines when loading.
- Three double acting hydraulic rams in 2.2m & 2.5m models.

920

1500

3x 70mm

920

1500

3x 70mm

All moving parts fitted with greasing points.

920

1500

2x 70mm

Telehandler Tine Grab

920

1500

2x 70mm

TTG1300 TTG1500 TTG1800 TG1500 TG1800 **TG2200 TG2500** Height (mm) 830 830 830 990 990 990 990 Width (mm) 1300 1520 1766 1500 1800 2200 2500 Depth (mm) 865 865 865 1150 1150 1150 1150 0.9 1.35 1.55 Capacity (m³) 0.4 0.5 0.6 1.1 304 386 555 592 Weight (kg) 265 333 430 9 Number of base tines 8 9 8 11 12 Tine spacing (mm) 185 185 190 185 195 190 195

All of our attachments are designed to operate at 200 BAR hydraulic pressure. Machines operating above 200 BAR will require a relief valve. Weights include bolt on frame.

680

795

2x 70mm

680

795

2x 70mm



Chop 'N' Feed Bucket







Chop'N'Feed Bucket

ProDig Beet Chopper and Meal Feeding Bucket is available in three sizes from 2m to 2.5m which will suit tractor loaders, telehandlers, articulated loaders & Tractor 3 Point Linkage. This versatile unit is equipped with a hydraulic motor which drives a heavy-duty auger for both chopping and feeding out so there is no need for a PTO drive. The large output on the bucket allows the bucket to unload and chop in a minimal amount of time.

- Auger motor is fitted on the rear of the bucket rather than the side to allow use in close proximity with walls.
- Easy access to all moving parts.
- Heavy duty buckets construction to allow for use on all machines.
- Bolt on hitch system mean the bucket can be mounted off centred if required.
- · Hardened cutting edge and leading edge
- · Available with bolt on hitch system to fit all machines
- Option of right or left-hand side chopping.
- Four minutes per cubic meter chop rate

Chop'N'Feed Bucket Width of Edge (mm) Height (mm) Depth (mm) Capacity (m3) Weight (kg)	CNF2000 2000 1025 1275 1.45 615	CNF2300 2300 1025 1275 1.64 676	CNF2500 2500 1025 1275 1.78 725
Shell (mm)	6	6	725 6
Sides (mm)	6	6	6
Cutting edge (mm) Weights include bolt on frame.	- -	16x150	16x150





ProDig Attachments Newtown, Bangenalstown Carlow, Ireland

+353 (0)59 972 7494

+353 (0)86 7809888

 $ar{ar{\otimes}}$

sales@prodigattachments.com

8

www.prodigattachments.com

Your Contact:

Version 01/22



STRENGTH

D E S I G N





INNOVATION



Grass Handling Range

MANUFACTURERS OF QUALITY MACHINERY ATTACHMENTS FOR AGRICULTURAL AND CONSTRUCTION SECTOR



Bale Handler










Bale Handler

The Prodig Bale Handler is designed and manufactured for reliability and extremely long service life. The unit is manufactured with high operator visibility, the main legs are engineered and fabricated from High Yield plate combined with large diameter quick release rollers make this a fast, efficient and versatile attachment that can be fitted to tractor, telehandler or articulated loader.

- · Hydraulic bale handler for quick and efficient moving and stacking of bales.
- · Large diameter 115mm rollers reduce plastic stress and ensure safe handling of wrapped bales.
- · Heavy duty legs fabricated using Hardox plate and heavy wall tine bush for long life.
- 1250mm stone fork tines as standard.
- Bushings and grease points on all pivot points.
- Oversize hydraulic ram means the handler can easily rip bales apart in feeding season.
- Open centers 1575mm, closed centers 815mm.
- Uniquely designed bale handler means it is suitable for both tractors and telehandlers.
- · Bolt on hitches available to fit all machines.
- Optional unique locking system on the tubes means removal takes seconds, without tools.
- The best tube roller system on the market for free spinning greasable tubes.


Bale Handler BH 500 600 (main frame) Height (mm) 1235 Width (mm) Depth (mm) 306 (depth of main frame) 1490(depth of full assembly) 183 (including roller tubes) Weight (kg) Open centres (mm) Closed centres(mm) All of our attachments are designed to operate at 200 BAR hydraulic pressure. Machines operating above 200 BAR will require a relief valve.

Standard Tubes





Optional Roller Tubes

















Bale Grab

The Prodig Bale Grab is an extremely robust unit for moving bales with minimal damage to the plastic wrap. The unit is suitable for tractor, telehandler and articulated loader.

- Hydraulic bale grab for quick and efficient moving and stacking of bales.
- Wrap damage is eliminated by our tubular arms covering a large area of the wrapped bales.
- Arms can be locked in multiple positions on either side for stacking purposes.
- The grab allows for stacking bales on their end or on their side.
- Excellent width capabilities from 1870mm to 413mm.
- Can handle round or small square bales for loading or unloading.
- The frame depth is kept at a minimum so the bale sits closer to the machine.
- Bushings and grease points on all pivot points.
- · Bolt on hitches available to fit all machines.
- · Optional add-on check valve available for constant grip and safety

_	phonai add on oncok valve avanable i	or constant grip and salety.
	BALE GRAB	BG 500
	Height (mm)	700 Height of paddle
		415 Height of frame
	Width (mm)	1384
	Depth (mm)	216 Depth of main frame
		1370 Depth of full assembly
	Weight (kg)	171
	Open centres(mm)	1870
	Closed centres(mm)	413
	All of our attachments are designed to ope	
	- Wallings obelanno above 700 bak will re	CONTRACTOR VALVE

Optional check valve









Bale Stacker









Bale Stacker

The Prodig Bale Stacker is an attachment designed to increase efficiency when handling large numbers of round and square bales with units available to suit tractor loader, telehandler and wheel loader.

- Hydraulic grab for moving and stacking large square and round bales.
- Available in two models, C320 for handling 3qty 900X1200mm or 2qty round bales. C430 for handling 4qty 900X1200mm or 3qty round bales.
- Removable bottom tine bar which can be floating, or fixed up or down as standard with the option of hydraulic folding.
- Curved Hardox tines in arm spaced to catch all bale types.
- Double hydraulic cylinder system with no troublesome linkage bars.
- Top push bar with height adjustment to stabilize the stack when retracting bottom tines.
- Heavy duty construction using structural grade section and high yeild plate throughout.
- Greasable hinge points throughout.
- Robust locking system on bottom bar allows it to be removed easily.
- Bolt on hitches available to fit all machines.

Polo	Stacker	C320	C430
Daie	Stacker	6320	
Heigh	nt (mm)	2080	2750
Width	n (mm)	1840 when opened	1840 when opened
Deptl	n (mm)	715 when closed	715 when closed
Capa	city	3(900mm)square bales	4 (900mm)square bales
		or 2 round bales	or 3 round bales
Weig	ht (kg)	561 including bottom bar	654 including bottom bar
		456 excluding bottom bar	537 excluding bottom bar
Hydra	aulic Cylinders	2 x 70mm Bore	2 x 70mm Bore
All of o	our attachments are designe	d to operate at 200 BAR hydraulic p	pressure.
Macnir	ies operating above 200 BA	R will require a relief valve.	



Push Off Grass Fork









Push Off Grass Forks

The Prodig Push Off Grass Fork is designed to quickly and efficiently handle high volumes of grass silage on large horsepower tractors, telehandlers and wheeled loaders.

- Designed for use on large tractors & loaders.
- Heavy duty construction using high yield structural hollow sections and plates.
- Available in widths from 2.5m to 4.0m with Hardox or KV type tines
- 1400mm square profile Hardox tines used in bottom bar for long service life. Our full range of Hardox tines are manufactured incorporating a replaceable wear tip meaning the tine never has to be replaced.
- 40mm pivot point pins fitted with greasable bushings.
- Full length hardened cutting edge wear plates on bottom section.
- Fitted with hydraulic flow divider valve and buffer pads to reduce impact on gate.
- Bolt on frame can be fitted with 3pt Linkage (CAT 2, 3 or 4) or loader brackets
- · Greasable bushings on all pivot points.
- Optional extras: Lighting kit -(no:2 front facing work lights & transport front & rear facing side markers lights) or (transport front & rear facing side markers lights), Bolt on 3pt linkage or bracket options, colour options, gate

IUCK.						
Push Off	POGF 2500	POGF 2750	POGF 3000	POFG 3300	POGF 3600	POGF 4000
Grass Forks						
Height (mm)	1475	1475	1475	1475	1475	1475
Width (mm)	2500 (8ft)	2750 (9ft)	2995 (10ft)	3300 (11ft)	3600 (12ft)	4000 (13ft)
Depth (mm)	1420	1420	1420	1420	1420	1420
Weight (kg)	1150*	1220*	1285*	1360*	1420*	1525*
Tine lenght	1400mm (55")	1400mm (55")	1400mm (55")	1400mm (55")	1400mm (55")	1400mm (55")
Number of Tines	10	11	12	13	14	16
Tine Spacing(mm)	230	230	230	230	230	220
Hydraulic cylinder	2 x 70mm Bore	2 x 70mm Bore	2 x 70mm Bore	2 x 70mm Bore	2 x 70mm Bore	2 x 70mm Bore
All of our attachments				lic pressure.		
Machines operating a						
*Weight shown is for	bolt on frame (no brackets) &	Hardox tines			



Mammoth Folding Fork













Mammoth Folding Fork

The Prodig Mammoth Folding Fork is designed and built to handle the increased output from a new generation of large capacity loading shovels. Our fork is designed to withstand the rigorous demands of today's busy contractor with clever designs to reduce down time.

- · Designed for use on large wheel loaders.
- Heavy duty construction using high yield structural hollow section and plate.
- Available in widths from 3.6 meters (12ft) to a massive 5.5 meters (18ft).
- 1830mm (6ft) X 50mm Hardox tines as standard with optional 2100mm (7ft) long tines available.
- Our Hardox tines are made incorporating a replaceable wear tip meaning the tine never has to be replaced.
- 80mm pivot point pin fitted with replaceable hardened steel bushings.
- Hardox wear plate fitted to the full length of the bottom section.
- Fitted with hydraulic check valve for road safety & to increase pivot point lifespan.
- Double acting cushioned hydraulic cylinder on each wing.
- Incorporates a unique wing locking system when open which absorbs the stress and strain which would otherwise be all loaded on the pivot pin.
- Fitted with a spill frame with removable center for Z-linkage loaders.
- Greasable bushings on all pivot points.
- Optional extras: Lighting kit -(no:2 front facing work lights), colour options, transport tine guard, hydraulic flow divider valve.

Mammoth	Mammoth 36	Mammoth 42	Mammoth 49	Mamoth 55
Height (mm)	1750	1750	1750	1750
Width Open (mm)	3658mm (12ft)	4268mm (14ft)	4876mm (16ft)	5485mm (18ft)
Width Closed (mm)	2890mm (9ft5")	2890mm (9ft5")	2890mm (9ft5 ¹)	2890mm (9ft5")
Depth (mm)	2010	2010	2010	2010
Weight (kg)	1675*	1835*	1990*	2150*
Tine lenght (standard)	1830mm (6ft)	1830mm (6ft)	1830mm (6ft)	1830mm (6ft)
Tine width	50mm Hardox	50mm Hardox	50mm Hardox	50mm Hardox
Number of bottom Tines	14	16	18	20
Tine Spacing (mm)	227	227	227	227
Ram	2 x 75mm Bore	2 x 75mm Bore	2 x 75mm Bore	2 x 75mm Bore
*Weights shown are for t				
All of our attachments ar			ulic pressure.	
Machines operating above	ve 200 BAR will requ	ire a relief valve.		



Taurus Folding Fork











Taurus Folding Fork

The Prodig Taurus Folding Fork is built with the same strength and durability as our Mammoth folding fork but is designed for continental conditions with longer drier grass and large quantities of maize silage.

- The fork is fitted with wider tine spacing than our standard folding fork. This is to help longer, dryer grass silage to flow through the fork, making it easier to disperse on the pit.
- During maize season, the fork can then be fitted with a bolt on maize blade and tine infills which allows the fork to carry, disperse and level maize silage with ease.
- Available in widths from 3.6 meters (12ft) to 5.5 meters (18ft)
- 1830mm (6ft) X 50mm Hardox tines as standard with optional 2100mm (7ft) long tines available.
- Our Hardox tines are made incorporating a replaceable wear tip meaning the tine never has to be replaced.
- Incorporates a unique wing locking system when open which absorbs the stress and strain which would otherwise be all loaded on the pivot pin.
- Fitted with a hydraulic check valve & ram cushioning which assists with prolonging pin and bushing lifespan.
- 80mm pivot pin fitted with replaceable hardened steel bushings.
- Hardox wear plate fitted to the full length of the bottom section.
- Optional extras: Lighting kit (no:2 front facing work lights), colour options, transport tine guard, maize blade, hydraulic flow divider valve.

Taurus Height (mm) Width Open (mm) Width Closed (mm) Depth (mm) Weight (kg) Tine lenght Tine width	Taurus 36 1750 3658mm (12ft) 2890mm (9ft5") 2010 1520* 1830mm (6ft) 50mm Hardox	Taurus 42 1750 4268mm (14ft) 2890mm (9ft5") 2010 1685* 1830mm (6ft) 50mm Hardox	Taurus 49 1750 4876mm (16ft) 2890mm (9ft5'") 2010 1850* 1830mm (6ft) 50mm Hardox	Taurus 55 1750 5485mm (18ft) 2890mm (9ft5") 2010 2000* 1830mm (6ft) 50mm Hardox
O (O/				
Tine lenght	1830mm (6ft)	1830mm (6ft)	1830mm (6ft)	
Tine width	50mm Hardox	50mm Hardox	50mm Hardox	50mm Hardox
Number of bottom tines	10	12	14	16
Tine spacing (mm)	328	328	328	328
	2 x 75mm Bore		2 x 75mm Bore	2 x 75mm Bore
*Weights shown are for the All of our attachments are Machines operating above	designed to operate	e at 200 BAR hydrau		



Grass Fork & Contractor Grass Fork



Grass Fork (GF)

The Prodig Grass Fork is designed to utilise smaller machines when handling grass or maize silage such as tractor loader, tele-handler or small articulated loader.

- Designed for farmers utilising their own machinery for maize and silage.
- Available in widths from 2.2m to 3m.
- · Heavy duty fork back with vision windows to view outer tines when loading.
- 1250mm x 25mm square profile Hardox tines used in bottom bar for long service life.
- Our Hardox tines are made incorporating a replaceable Our full range of Hardox tines are manufactured wear tip meaning the tine never has to be replaced.
- · Engineered and fabricated bottom section for superior structural strength and rigidity.
- Also available with 1250mm forged stone fork tines Full width spill frame to increase capacity and prevent in steel bushes.
- Top spill frame as standard on all grass forks to increase volume and prevent spillage onto the loader.
- · Bolt on or welded hitch system to suit all machines.



Contractor Grass Fork (CF)

The Prodig Contractor Grass Fork is designed for large and medium wheeled loaders and large telehandlers handling grass silage in compact areas or with lower volumes.

- Designed for use on articulated loaders.
- Available in widths from 2.5m to 3.6m.
- Heavy duty construction using high yield structural hollow section and plate.
- 1400mm x 40mm square profile Hardox tines used in bottom bar for long service life.
- incorporating a replaceable wear tip meaning the tine never has to be replaced.
- Bottom wear pads made from 400 Brinell cutting edge.
- spillage of material onto the loader.
- · Hitches available to suit all machines.
- Optional extras: double side tines, bolt on centre spill frame for z-linkage, transport tine guard.

Grass Fork	GF2200	GF2500	GF2700	GF3000	CF 2500	CF 2750	CF 3000	CF 3300	CF 3600
Height (mm)	1150	1150	1150	1150	1415	1415	1415	1415	1485
Width (mm)	2200	2500	2700	3000	2500	2750	2995	3300	3600
Depth (mm)	1300	1300	1300	1300	1470	1470	1470	1470	1470
Weight (kg)	310	350	365	380	570	620	670	720	770
Tine lenght(mm)	1240 (48'')	1240 (48'')	1240 (48'')	1240 (48'')	1400(55'')	1400(55'')	1400(55'')	1400(55'')	1400(55'')
Tine spacing(mm)	220	200	220	220	225	225	225	230	230
Tine thickness(mm)	25	25	25	25	40	40	40	40	40
Number of tines	10	12	12	13	10	11	12	13	14

ProDig Attachments Newtown, Bangenalstown Carlow, Ireland

+353 (0)59 972 7494

+353 (0)86 7809888

sales@prodigattachments.com

www.prodigattachments.com

Your Contact:



STRENGTH

D m s -G z





INNOVATION



Grain-Industrial Handling Range

MANUFACTURERS OF QUALITY MACHINERY ATTACHMENTS FOR AGRICULTURAL AND CONSTRUCTION SECTOR



Hi-tip Bucket













Hi-Tip Bucket

- Available in our standard range of capacities from 1.6m³ up to 6.0m³.
- Discharge height and forward reach increased by 600mm to 1825mm respectively.
- For use with various bulk materials such as gravel, grain, woodchips, compost, etc.
- Soft close twin double acting hydraulic rams that are protected within double skin sides.
- Flat floor for easy loading, with 400 Brinell steel cutting edge.
- Can be fitted with optional 400 Brinell bolt on reversible cutting edge.
- High yield alloy steel used in the carriage frame for a longer working life.
- Designed with water level crowd-back to retain more material.
- Weld on or bolt on hitch brackets to suit any machine type.

Machines operating above 200 BAR will require a relief valve.

• Optional Extras: bolt on brackets (HTB 1.6m³ - 2.4m³ only), 3 part bolt on cutting edge, second weld on cutting edge, bolt on spill frame, Z-linkage cut out, colour options.

Code	Width(mm)		Capacity(m³)	Weight (kg)	Code	Width(mm)	Height(mm)	Capacity(m³)	Weight (kg)
HTB 1.6	1800	1225	1.6	725	HTB 4.15	2500	1500	4.15	1400
HTB 2.0	2280	1225	2 .0	920	HTB 4.6	2750	1500	4.6	1540
HTB 2.2	2500	1225	2.2	1010	HTB 5.0	3000	1500	5 .0	1680
HTB 2.4	2750	1225	2.4	1110					
					HTB 5.1	2500	1700	5.1	1650
HTB 2.55	2280	1360	2.7	1030	HTB 5.5	2750	1700	5.5	1815
HTB 2.8	2500	1360	2.8	1130	HTB 6.0	3000	1700	6.0	1980
HTB 3.0	2700	1250	3.0	1 240					
HTB 3.3	2750	1360	3.3	1240					
HTB 3.4	2500	1415	3.4	1200					
HTB3.5	2700	1415	3.5	1300					
HTB3.65	2750	1415	3.65	1325					
HTB 4.0	3000		4 .0						
		1415	d to operate a	1440	avdraulia pr				



Heavy Duty Hi-tip Bucket







Hi Tip Bucket

The Prodig Heavy Duty Hi-Tip backet is designed for large wheel loaders for agri & industrial use. This bucket is designed for use on loaders with up to 18 tonne break-out force.


- Available in our standard range of capacities from 3.65m³ up to 8.0 m³.
- Discharge height and forward reach increased by 1800mm to 2400mm respectively.
- For use with various bulk materials such as gravel, grain, woodchips, compost, etc.
- Soft close twin double acting hydraulic rams that are protected within double skin sides.
- Made with Hardox steel in the shell, leading edge, inner & outter bucket side.
- Hardox arms & high yield alloy steel used in the carriage frame for a longer working life
- Flat floor for easy loading, with 400 Brinell steel cutting edge.
- Can be fitted with optional 500 Brinell bolt on reversible cutting edge.
- Designed with water level crowd-back to retain more material.
- Weld on hitch brackets to suit any machine type.
- Optional Extras: 3 part bolt on cutting edge, second weld on cutting edge, Z-linkage cut out, bolt on spill frame & colour options.

Code	Width (mm)	Height (mm)	Depth (mm)	Capacity (m ³)	Weight (kg)
HD-HTB 3.65	2500	1575	1830	3.6	2245
HD-HTB 3.95	2750	1575	1830	3.95	2350
HD-HTB 4.3	3000	1575	1830	4.3	2455
HD-HTB 4.15	2500	1415	1730	4.15	2465
HD-HTB 4.6	2750	1415	1730	4.6	2565
HD-HTB 5.0	3000	1415	1730	5.0	2665
HD-HTB 5.1	2500	1715	1800	5.1	2780
HD-HTB 5.5	2750	1715	1800	5.5	2880
HD-HTB 6.0	3000	1715	1800	6.0	2980
HD-HTB 6.65	2500	1830	1900	6.65	2945
HD-HTB 7.35	2750	1830	1900	7.35	3045
HD-HTB 8.0	3000	1830	1900	8.0	3145

Weights may vary depending on add-on extras and hitch. All of our attachments are designed to operate at 200 BAR hydraulic pressure. Machines operating above 200 BAR will require a relief valve.



Mini Hi-tip Bucket

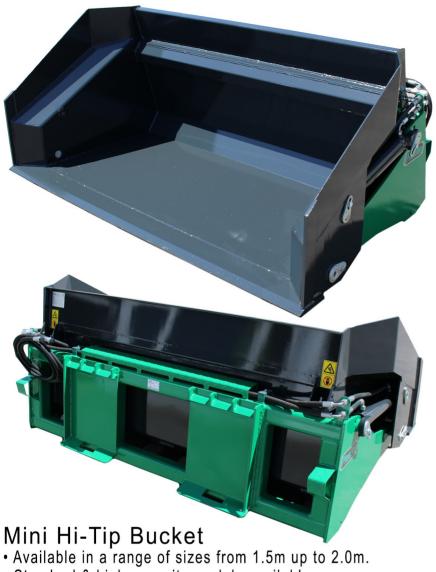







- Standard & high capacity models available.
 Discharge height and forward reach increased.
- For use with various materials such as gravel, grain, woodchips, compost, etc.
- Soft close twin double acting hydraulic rams that are protected within double skin sides.

- Flat floor for easy loading, with 400 Brinell steel cutting edge.
 Can be fitted with optional 400 Brinell bolt on reversible cutting edge.
 High yield alloy steel used in the carriage frame for a longer working life.
 Hitch system available to fit all machines.

Code Standard	Width(mm)	Height(mm)	Depth(mm)	Capacity(m³)	Weight(kg)
HTBSS 1500	1500	620	1200	0.57	330
HTBSS 1800	1800	620	1200	0.68	375
HTBSS 2000	2000	620	1200	0.80	435
High Capacity					
HTBSS 1500-H	1500	820	1200	0.80	370
HTBSS 1800-H	1800	820	1200	0.95	415
HTBSS 2000-H	2000	820	1200	1.1	480



Grain Bucket













Grain Bucket

- Grain buckets available in capacities from 1.9m³ to 4.9m³.
- Designed to handle bulk materials such as grain, wood-chip etc.
- Pressed steel curved shell retains less material when emptied.
- Hardened 200mm x 25mm to 250mm x 30mm steel cutting edge as standard respectively.
- 12mm wear straps for superior structural integrity.
- Side wear strips as standard.
- · Crowd back to water level on most machines.
- Optional extras: Reversible bolt on edge

Code	Width (mm)	Height (mm)	Depth (mm)	Capacity(m ³)	Weight (kg)
GB 1.9	2280	1060	1265	1.9	540
GB 2.1	2500	1060	1265	2.1	570
GB 2.3	2750	1060	1265	2.3	600
GB 2.5	2995	1060	1265	2.5	640
GB 2.7	2280	1300	1560	2.7	745
GB 3.0	2500	1300	1560	3.0	820
GB 3.3	2750	1300	1560	3.3	900
GB 3.6	2995	1300	1560	3.6	980
GB 4.0	2500	1490	1625	4.0	955
GB 4.5	2750	1490	1625	4.5	1055
GB 4.9	2995	1490	1625	4.8	1155



Agri Loader Bucket













- Agri Loading Shovel Bucket

 Articulated Loading Shovel Buckets available in capacities from 1.9m³ to 2.6m³.

 Designed for intense heavy duty use such as loading, re-handling etc.

 Manufactured with a various range of high yield plates.
- Rolled high yield steel curved shell retains less material when emptied.
 Hardened 400 Brinell 250 X 30 leading edge.
- · Optional extras:
 - Reversible bolt on 400 Brinell edge or replaceable tip heavy duty teeth, high volume sides.
- Fitted with bucket level indicator as standard.
- Angled fin plates brace the top deflector and guide debri away from hitch.

Agri Loading Shovel Bucket	ALB 1.9	ALB 2.1	ALB 2.3	ALB 2.5	ALB 2.6
Width (mm)	2280 1235	2500 1235	2750 1235	2995 1235	3100 1235
Height (mm) Depth (mm)	1200	1200	1200	1200	1200
Capacity (m³) Weight (kg)	1.9 835*	2.1 900*	2.3 965*	2.5 1020*	2.6 1055*
Shell (mm)	8	8	8	8	8
Sides (mm) Cutting edge (mm) *weight including Ir		10 30x250 ro 50 hitch	10 30x250	10 30x250	10 30x250



Industrial Loader Bucket



- Industrial Loading Shovel Bucket
 High Capacity Articulated Loading Shovel Buckets available in capacities from 3.15m³ to 3.9m³.
 Designed for intense heavy duty use such as loading, re-handling etc.
 Manufactured with a various range of high yield plates.
 Rolled high yield steel curved shell retains less material when emptied.
 Floor of bucket angled 5 degrees from the ground. This means the heel takes most of the wear and saves the shell from wear. of the wear and saves the shell from wear.
- Hardened 400 Brinell 300 X 30 leading edge and heel plate.
- Optional extras: Reversible bolt on 500 Brinell edge, replaceable tip heavy duty teeth, high volume sides, also a wide range of armoured protection parts.

Industrial Loading Shovel Bucket	ILB 3.15	ILB 3.45	ILB 3.8	ILB 3.9
Width (mm)	2500	2750	2995	3100
Height (mm)	1585	1585	1585	1585
Depth (mm)	1320	1320	1320	1320
Capacity (m³)	3.15	3.45	3.8	3.9
Weight (kg)	1280*	1350*	1420*	1445*
Shell (mm)	8	8	8	8
Sides (mm)	10	10	10	10
Cutting edge (mm) *weight including Inc		30x250 50 hitch	30Xx50	30x250



Bag Filler Bucket















Bag Filler Bucket

The Prodig Bag Filler Bucket is a clever unit that can be used to pick up material, fill and move bulk bags which increases productivity and eliminates spillages while loading bags. Also ideal for loading small trailers and hoppers.

- Available in 0.6m3, 1.0m3, 1.4m3 and 2.0m3 capacity to suit different size bags.
- Designed to fill various types of materials into bulk bags with ease.
- Economical one-person operation to fill and move bags with a single machine.
- 400 brinell Hardened steel 150 x 20 cutting edge with wear strips on bucket floor.
- Adjustable two-way hydraulic ram with check valve used to open heavy duty 20mm doors.
- Fitted with pressure relief valve to prevent damage with doors are obstructed.
- Bolt on hitch system available to fit all machines.
- optional extras: bolt on cutting edge, weigh load system, weigh load system complete with bluetooth transmitter.

Bag Filler Bucket	BF600	BF1000	BF1400	BF2000			
Height (mm)	775	985	1125	1300			
Width (mm)	1700	2020	2260	2560			
Depth (mm)	1170	1315	1450	1620			
Weight (kg)	400*	565*	669*	845*			
Capacity (m³)	0.6	1.0	1.4	2.0			
Cutting edge (mm)	150x20	150x20	150x20	200x25			
Ram	1x50mm Bore	1x50mm Bore	1x50mm Bore	1x50mm Bore			
All of our attachments are designed to operate at 200 BAR hydraulic pressure. Machines operating above 200 BAR will require a relief valve. *Weight including bolt on frame.							



Fork Lift Bagfiller













Forklift Bag Filler Bucket

The Prodig Forklift Bag Filler Bucket is a unique attachment to utilise your forklift to pick up material, fill and move bulk bags which increases productivity and eliminates spillages. This unit can be fitted with load cells allowing it to weigh the material filled into bulk bags.

- Available in 0.6m³, 1.0m³ & 1.4m³ capacity to suit different size bags.
- Designed to fill various types of materials into bulk bags with ease using your forklift.
- Economical one-person operation to fill and move bags with your forklift.
- optional extras: bolt on cutting edge, weigh load system, weigh load system complete with bluetooth transmitter.
- Hardened steel 150mm x 20mm cutting edge with wear strips on bucket floor.

Forklift Bagfiller Bucket	FBF600	FBF1000	FBF1400		
Height (mm)	760	960	1080		
Width (mm)	1700	2020	2260		
Depth (mm)	1440	1550	1650		
Weight (kg)	555	670	760		
Capacity (m³)	0.6	1.0	1.4		
Cutting edge (mm)	150x20	150x20	150x20		
Ram	2x70mm Bore	2x70mm Bore	2x70mm Bore		
All of our attachments are designed to operate at 200 BAR hydraulic pressure. Machines operating above 200 BAR will require a relief valve.					













Stone Fork

The Prodig Stone Fork has a uniquely designed Hardox cranked tine which allows the fork to move through soil more efficiently. The forks design allows it to be attached to a tractor three point linkage as well as front loader.

- Forks available in widths from 1.8m to 2.5m.
- Manufactured with unique cranked 25mm Hardox tines which easily slide under stones in soil.
- Heavy duty fork back with top vision grid to view all tines when loading.
- Engineered and fabricated bottom section for superior structural strength and rigidity.
- Fitted with side tines for better load retention.
- Available with bolt on or welded hitch system to fit all machines. 3 point linkage combo hitch available on request.

Stone Fork Height (mm) Width (mm) Depth (mm) Weight (kg) Tine lenght (mm) Number of tines	SF1800	SF2200	SF2500
	885	885	1150
	1800	2200	2500
	1050	1050	1050
	387*	454*	540*
	990 (39'')	990 (39'')	990 (39")
	18	22	25
Tine spacing(mm) *Weight including bolt on fr		100	100













Pallet Forks

The Prodig Pallet Forks are a heavy duty certified set of forks that can be used in the agri, construction and recycling sectors.

• Ideal attachment for tractors and industrial loaders for safe loading and unloading.

- Available in 2 tonne up to 10 tonne.
- Fully certified forks with spring loaded locking pins for secure width adjustment.
 All forks comply to ISO 2328

- Heavy duty fork back with heavy top and bottom rail.
 Welded hitch brackets to suit all machines including excavators.
- Optional load guard can be fitted to any type of fork carriage.

Pallet Forks	PF 2000	PF 3000	PF 4900	PF 7000	PF 1000
Spec of Fork Carriage					
Height (mm)	410	510	510	630	630
Width (mm)	1250	1270	1270	1800	2100
Depth (mm)	75	75	95	120	170
Weight (kg)	70	80	90	250	425
Fork size (mm)	100x40x1250	100x45x1250	120x60x1250	150X60X1250	150X70X1250













Pro Sweep

ef

The Prodig Pro Sweep efficiency and reduce of and other areas. Push broom sweeper Available in widths of Long life polypropyler No hoses, chains or reduced bristle ho Hitches to fit back an Low dust generation of Fold away stands for	osts when maintaining suitable for use on a 2.0m and 2.5m with the bristles which can noving parts to maintalders to ensure longed front end of all type due to design make it			
ProSweep Height (mm) Width (mm)	PS 2000 330 2000	PS 2500 330 2500		

ProSweep	PS 2000	PS 2500
Height (mm)	330	330
Width (mm)	2000	2500
Depth (mm)	685	685
Weight (kg)	140	170
Rows of bristles	11	11

Hitches available: Pallet Fork Sleeves, 3 Point Linkage, Pallet Fork Sleeves & 3 Point Linkage Combo, Tractor/Loader Hitches, Skid-Steer Hitch, Swivel Hitch

ProDig Attachments Newtown, Bangenalstown Carlow, Ireland

+353 (0)59 972 7494

+353 (0)86 7809888

sales@prodigattachments.com

www.prodigattachments.com

1	1-			0	_	_ 1		_ 1	L .
1	ſ O) U	r	C	OI	nτ	a	CI	