

# 316 VP

## Skid Steer



JOHN DEERE



316 P-TIER SKID STEER

## SMALL MACHINE, SIZABLE RESULTS

When you need small equipment that can rise high, master heavy loads, and deliver impressive boom- and bucket-breakout forces, the John Deere 316 P-Tier Skid Steer can be the do-it-all machine that fits the work you do. Its radial-boom configuration, amped-up performance, and wide range of options are the result of some of the best ideas we've heard — and put into action — from users just like you. Whether you're buying your first machine or boosting the flexibility of an existing fleet, this multipurpose compact is designed to elevate your bottom line.

## FEATURES



**EASY TO TRAILER  
BEHIND A STANDARD  
PICKUP TRUCK**



### **It's easy to take control**

Electrohydraulic (EH) ISO-pattern joystick controls that allow customized machine operations based on operator preference are standard on the 316 P-Tier.

### **Elevated by design**

Radial-lift boom provides generous reach at mid-range lift heights and enables the 316 P-Tier to excel at digging, grading, and backfilling applications.

### **Try it on for size**

Weighing only 6,180 pounds, this compact is easy to trailer behind a standard pickup truck using the convenient front and rear tie-downs. Heavy-duty tire option slims the 316 P-Tier down to a narrow 60-inch width.

### **Imagine the possibilities**

Ample axle torque and optimized boom- and bucket-breakout forces help carve out clay, push through piles, and heap the load.

### **Step up the pace**

Two-speed transmission option provides faster transport speeds of up to 10 miles per hour, to move around the jobsite quicker and push productivity even further.

### Packed for productivity

Low center of gravity, 30-degree bucket rollback, optional ride control, and optional hydraulic self-leveling help keep forks loaded and buckets full. Add capacity with up to two sets of rear counterweights.

### Big ideas that deliver

Large cab entryway with swing-out door, generous foot- and legroom, sealing and pressurization to minimize dust and noise, and adjustable high-back sculpted seat optimize operator comfort. Overhead panel conveniently puts machine data on the left and control switches on the right. Easy-to-read LCD monitor reveals a wealth of vital operating info and advanced diagnostics.

### Seeing is believing

Clear sightlines to the cutting edge and bucket corners, above and below the lift arms, and the jobsite ahead and behind instill confidence in close quarters. Optional LED side lighting and rearview camera further enhance visibility.

### Tackle the to-do list

Swing-out rear door enables easy, ground-level access to daily service checkpoints and cooling system components. Neat freaks and rental yards can appreciate the convenient cab-footwell access that helps speed cleaning.

### Work your connections

Equip your skid steer with your choice of over 100 available John Deere attachments to expand the flexibility of your operation. Increased auxiliary hydraulic flow and power compared to previous models boosts attachment performance. Add a snow blower, snow pusher, or angle broom to make quick work of winter's white stuff.



## 316 P-TIER SKID STEER



**SWITCHING ATTACHMENTS  
ENABLES VERSATILITY IN  
ANY WEATHER OR SEASON**

### Safety first

Standard personal-protection features include in-cab-activated boom lock and triple-interlock system that detects the presence of the operator.

### Connected machines


John Deere construction equipment comes with in-base connectivity – free from subscriptions or annual renewals. Analyze critical machine data, track utilization, review diagnostic alerts, and more from **the John Deere Operations Center™**. The Operations Center also enables John Deere Connected Support™, which uses data from thousands of connected machines to proactively address issues before they arise. With your approval, your dealer can also remotely monitor machine health, diagnose problems, and even update machine software without a trip to the jobsite.\*

\*Availability varies by region and product. Options not available in every country.

316 P-TIER		
Manufacturer and Model	Yanmar 4TNV86CHT	Yanmar 4TNV86HT
Non-Road Emission Standard	EPA Final Tier 4	Conforms to UN R96 (EU Stage IIIA equivalent)
Cylinders	4	4
Net Power (SAE J1349 / ISO 9249)	45.6 kW (61 hp) at 2,600 rpm	41.5 kW (56 hp) at 2,600 rpm
Gross Rated Power (ISO 14396)	48.5 kW (65 hp) at 2,600 rpm	44.4 kW (60 hp) at 2,600 rpm
Peak Torque	207 Nm (153 ft.-lb.) at 1,690 rpm	207 Nm (153 ft.-lb.) at 1,690 rpm
Displacement	2.1 L (128 cu. in.)	2.1 L (128 cu. in.)
Rated Engine Speed	2,600 rpm	2,600 rpm
Torque Rise	21% at 1,690 rpm	27% at 1,690 rpm
Aspiration	Turbocharged	Turbocharged
Air Cleaner	Dry dual element	Dry dual element
<b>Cooling</b>		
Fan Type	Direct belt drive	
<b>Powertrain</b>		
Type	Hydrostatic-manual or electrohydraulic (EH); 4 – 80 heavy-duty (HD) continuous-loop chain	
Speeds		
Single	11.1 km/h (6.9 mph)	
2 Speed, High	16.3 km/h (10.1 mph)	
Axles	Induction-hardened, 1-piece forged axle shafts with maintenance-free oil-bath lubrication of inner and outer axle bearings	
Maximum Axle Torque	6459 Nm (4,764 lb.-ft.)	
Tractive Effort	3552 kgf (7,831 lbf)	
<b>Final Drive</b>		
Brakes	High-strength, adjustment-free chains	
<b>Hydraulics</b>		
Pump Flow (maximum), Standard	63 L/m (17 gpm)	
System Pressure at Couplers	23 787 kPa (3,450 psi)	
Hydraulic Horsepower Flow (calculated), Standard	25 kW (33 hp)	
Auxiliary Hydraulics	Standard connect-under-pressure with flat-faced couplers	
<b>Cylinders</b>		
Type	John Deere heat-treated, chrome-plated polished cylinder rods, hardened steel (replaceable bushings) pivot pins	
<b>Electrical</b>		
Voltage	12 volt	
Battery Capacity	750 CCA standard / 925 CCA optional	
Alternator Rating	75 amp with no air conditioning (A/C) / 90 amp with A/C	
<b>Lights</b>		
Standard	Halogen: 2 front and 1 rear	
Deluxe	LED: 2 front, 2 side, and 1 rear	
<b>Operator's Station</b>		
ROPS (ISO 3471) / FOPS (ISO 3449) structure with quick pivot standard		
<b>Tires/Wheels</b>		
Standard Tire Size	10 x 16.5	

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

316 P-TIER	
<b>Serviceability</b>	
<b>Refill Capacity</b>	
Fuel Tank	71 L (19 gal.)
<b>Operating Weight</b>	
Base Machine	2806 kg (6,180 lb.)
<b>Machine Dimensions</b>	
A Length Without Bucket	2.63 m (103.0 in.) (8 ft. 7 in.)
B Length With Foundry Bucket	3.24 m (127.6 in.) (10 ft. 8 in.)
C Width Without Bucket	1.60 m (62.9 in.) (5 ft. 3 in.)
D Height to Top of ROPS	1.96 m (77.2 in.) (6 ft. 5 in.)
E Height to Hinge Pin	2.92 m (115.1 in.) (9 ft. 7 in.)
F Dump Height With Foundry Bucket	2.25 m (88.6 in.) (7 ft. 5 in.)
G Dump Reach	
With Foundry Bucket	0.40 m (15.8 in.)
With Construction Bucket	0.58 m (22.8 in.)
H Wheelbase	1.05 m (41.5 in.) (3 ft. 5 in.)
I Ground Clearance	0.18 m (7.0 in.)
J Angle of Departure	22.3 deg.
K Front Turn Radius With Foundry Bucket	2.01 m (79.0 in.) (6 ft. 7 in.)
L Dump Angle (full lift height)	45 deg.
M Bucket Rollback (ground level)	30 deg.

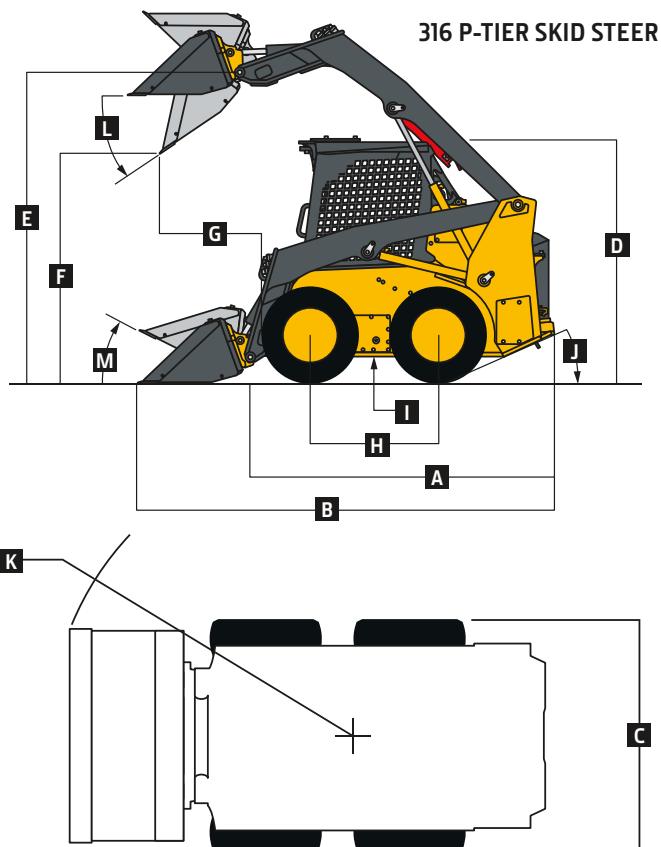

Loader Performance	
Tipping Load	1589 kg (3,500 lb.)
SAE Rated Operating Capacity	795 kg (1,750 lb.)
With Counterweight	863 kg (1,900 lb.)
Boom Breakout Force	
With Foundry Bucket	2157 kg (4,750 lb.)
Bucket Breakout Force (continued)	
With Construction Bucket	2043 kg (4,500 lb.)
Bucket Breakout Force	
With Foundry Bucket	2384 kg (5,250 lb.)
With Construction Bucket	1816 kg (4,000 lb.)

While general information, pictures, and descriptions are provided, some illustrations and text may include product options and accessories NOT AVAILABLE in all regions, and in some countries products and accessories may require modifications or additions to ensure compliance with the local regulations of those countries.

Net engine power is with standard equipment including air cleaner, exhaust system, alternator, and cooling fan, at standard conditions per SAE J1349 and DIN 6270B, using No. 2-D fuel at 35 API gravity. Gross power is without cooling fan. No derating is required up to 3050-m (10,000 ft.) altitude. Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with SAE standards. Except where otherwise noted, these specifications are based on a unit with standard equipment, full fuel tank, and 79-kg (175-lb.) operator.



MK316PAM (25-04)



**JOHN DEERE**