


ZX210F-3

ZAXIS | DASH-3 FORESTERS


PROCESSOR

Operating Weights		ZX210F-3
With 840-kg (1818 lb.) Full Fuel Tank; 79-kg (175 lb.) Operator; 4000-kg (8,818 lb.) Counterweight; 2120-kg (4,673 lb.) Processor and 700-mm (28 in.) Double-Grouser Shoes		
SAE Operating Weight		27 864 kg (61,430 lb.)
Operating Dimensions		
Lifting Capacity Over Front at Ground Level 6.1 m (20 ft.)		
Reach with Power Boost, with attachment		5806 kg (12,800 lb.)
A	Maximum Reach	8.76 m (28 ft. 9 in.)
A'	Maximum Reach at Ground Level	8.51 m (27 ft. 11 in.)
B	Maximum Depth	4.80 m (15 ft. 9 in.)
C	Maximum Height	9.64 m (31 ft. 7 in.)
D	Maximum Level Log Height	7.36 m (24 ft. 2 in.)
E	Minimum Swing Radius	3.10 m (10 ft. 2 in.)

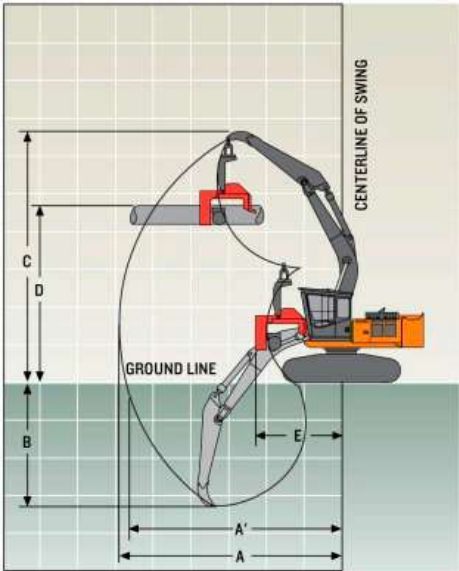

PROCESSOR

Machine Dimensions		ZX210F-3
A	Height	3.61 m (11 ft. 10 in.)
B	Overall Length	9.88 m (32 ft. 5 in.)
C	Rear-End Length/Swing Radius	3.10 m (10 ft. 2 in.)
D	Distance Between Idler/Sprocket Centerline	3.66 m (12 ft.)
E	Undercarriage Length	4.45 m (14 ft. 7 in.)
F	Counterweight Clearance	1.33 m (4 ft. 4 in.)
G	Maximum Shipping Width	3.36 m (11 ft.); 3.49 m (11 ft. 6 in.)
H	Cab Height	3.68 m (12 ft. 1 in.)
I	Track Width w/ Double-Grouser Shoes	700 mm (28 in.)
J	Gauge Width	2.62 m (8 ft. 7 in.); 2.79 m (9 ft. 2 in.)
K	Ground Clearance	0.66 m (2 ft. 2 in.)
L	Undercarriage Width	3.33 m (10 ft. 11 in.)

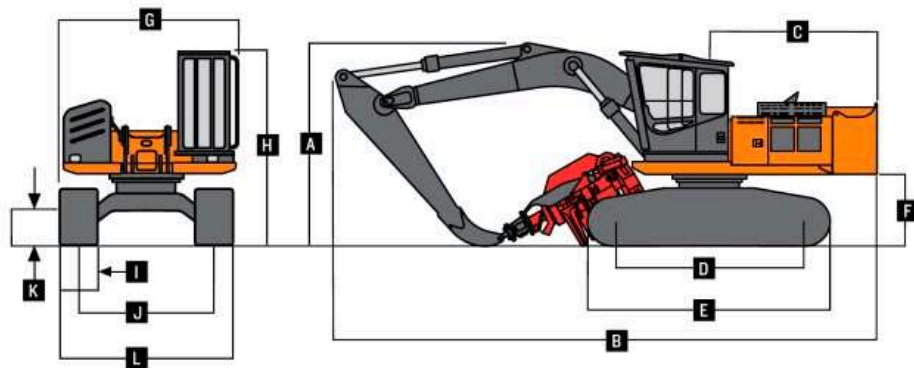

Lift Charts												
Load Point Height 1.5 m (5 ft.) 3.1 m (10 ft.) 4.6 m (15 ft.) 6.1 m (20 ft.) 7.6 m (25 ft.) 9.1 m (30 ft.)												
Horizontal Distance from Centerline of Rotation												
	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side	Over Front	Over Side
9.2 m (30 ft.)					3221 (7,100)	3221 (7,100)						
7.6 m (25 ft.)							2948 (6,500)	2948 (6,500)				
6.1 m (20 ft.)					3175 (7,000)	3175 (7,000)	3084 (6,800)	3084 (6,800)	2223 (4,900)	2223 (4,900)		
4.6 m (15 ft.)			6078 (13,400)	6078 (13,400)	4445 (9,800)	4445 (9,800)	3629 (8,000)	3629 (8,000)	3221 (7,100)	3221 (7,100)		
3.1 m (10 ft.)			11 068 (24,400)	11 068 (24,400)	6260 (13,800)	6260 (13,800)	4491 (9,900)	4491 (9,900)	3583 (7,900)	3357 (7,400)		
1.5 m (5 ft.)			14 334 (31,600)	14 334 (31,600)	7847 (17,300)	7847 (17,300)	5307 (11,700)	4944 (10,900)	3992 (8,800)	3221 (7,100)		
Ground Line			14 470 (31,900)	14 470 (31,900)	8664 (19,100)	7893 (17,400)	5806 (12,800)	4763 (10,500)	4218 (9,300)	3130 (6,900)		
-1.5 m (~5 ft.)	23 950 (52,800)	23 950 (52,800)	13 517 (29,800)	13 517 (29,800)	8573 (18,900)	7802 (17,200)	5851 (12,900)	4672 (10,300)	4128 (9,100)	3084 (6,800)		
-3.1 m (~10 ft.)			11 657 (25,700)	11 657 (25,700)	7666 (16,900)	7666 (16,900)	5216 (11,500)	4717 (10,400)				
-4.6 m (~15 ft.)					5534 (12,200)	5534 (12,200)						