HONDA

POWER EQUIPMENT




# GENERATORS

# Generators




Today, Honda generators are found hard at work around the world —from challenging remote locations to our very own harsh climate conditions found throughout Canada. Over 55 years of Power Equipment development and innovation by Honda engineers have given rise to a lengthy line of hard-working generators and applications built to suit your needs.

## Trusted Performance

Honda Generators are powered by proven 4-stroke Honda engines that don't mix oil and gas. This offers many advantages, including clean and quiet operation, low ownership costs and low emissions.

## CSA Approved

All Honda Generators purchased in Canada meet or exceed Canadian Standards Association (CSA) safety and Environmental Protection Agency (EPA) emissions standards.

## Light & Compact

Our latest inverter generators are smaller, lighter and quieter than ever before. Many Honda generators produce voltage that is smoother and more consistent than commercially available power sources.

## Dual-Voltage Selection

Honda high-output generators offer dual electrical standby power and are available in 4,000 to 10,000 watt models. The dual-voltage configuration allows you to power up appliances that require 120 or 240 volts.

## Cold Climate Technology™

Available on all models, Honda Cold Climate Technology™ is specifically designed for cold Canadian climates. This standard-issued breather heater system helps prevent generator shutdown in freezing conditions, so you don't get left out in the cold.

## Exceptional Warranty

Honda generators feature proven quality and reliability, along with a trusted warranty protection up to 36 months, and the support of a convenient Honda retailer network offering exceptional service.

## Easy Operation

From intuitive features and ease-of-use to the carefully crafted reliability of portable power, all Honda generator controls are easily accessible and designed for ultimate convenience.

## Super Quiet Operation

Honda Super Quiet portable generators feature exhaust and muffler technology engineered to lower noise ratings within the 48-60 dB(A) ranges, so you'll have to worry less about disturbing your neighbours — or your own peace and quiet.

## Long Lasting Quality

Honda Generators are premium products offering rugged yet clever design with long lasting quality you can count on.

## Power Sensitive Electronics

Honda was first to develop generators capable of powering sensitive electronics. Inverter technology regulates surges of raw power and smooths them out to the same high-quality electricity as the outlets in your home. The inverter models range from 1,000 to 7,000 watts to power everything from a laptop to a cottage.



# **The right wattage** for the right amount of power

| | Application | Approximate wattage required for running | Approximate wattage required for starting |
|---|---|---|---|
| HOME | **Coffee Maker** | 1,750 | 1,750 |
| | **Dishwasher** | 1,450 | 1,800 |
| | **Electric Fry Pan** | 1,300 | 1,300 |
| | **Electric Range** | | |
| | **6 in. element** | 1,500 | 1,500 |
| | **8 in. element** | 2,100 | 2,100 |
| | **Microwave Oven, 625 watts** | 625 | 800 |
| | **Toaster** | | |
| | **2-slice** | 1,050 | 1,050 |
| | **4-slice** | 1,650 | 1,650 |
| | **Electric Blanket (queen size)** | 800 | 800 |
| | **Refrigerator or Freezer** | 700 | 2,200 |
| | **20" Box Fan or Table Fan** | 120 | 180 |
| | **Lights (as indicated on bulbs.)** | (-) | (-) |
| | **Clothes Washer** | 1,150 | 2,300 |
| | **Clothes Dryer** | | |
| | **Gas** | 700 | 1,800 |
| | **Electric** | 5,750 | 1,800 |
| | **Dehumidifier** | 650 | 800 |
| | **Furnace Fan, gas or fuel oil** | | |
| | **0.125 hp** | 500 | 1,000 |
| | **0.16 hp** | 750 | 1,500 |
| | **0.25 hp** | 900 | 1,800 |
| | **0.3 hp** | 1,000 | 1,800 |
| | **0.5 hp** | 1,200 | 2,500 |
| | **Sump Pump** | | |
| | **0.3 hp** | 750 | 1,500 |
| | **0.5 hp** | 1,000 | 2,100 |
| | **Hair Dryer** | 300 to 1,500 | 300 to 1,500 |
| | **Clothes Iron** | 1,200 | 1,200 |
| | **Room Air Conditioner - 10,000 BTU** | 1,500 | 2,200 |
| | **Central Air Conditioner** | | |
| | **10,000 BTU** | 1,500 | 2,200 |
| | **20,000 BTU** | 2,500 | 3,300 |
| | **24,000 BTU** | 3,800 | 4,950 |
| | **40,000 BTU** | 6,000 | 7,800 |
| PLAY | **Radio** | 50 to 200 | 50 to 200 |
| | **Television (colour)** | | |
| | **20 in. (LCD)** | 65 | 65 |
| | **26 in. (LCD)** | 110 | 110 |
| | **36 to 42 in. (Plasma)** | 250 | 250 |
| | **50 to 60 in. (Plasma)** | 340 | 340 |
| | **VCR/ DVD** | 35 to 50 | 35 to 50 |
| | **Game Console** | 100 | 100 |
| | **Laptop** | 50 to 75 | 50 to 75 |
| | **Computer** | 150 | 150 |
| | **Modem** | 25 | 25 |
| | **Monitor** | | |
| | **Tube Type** | 200 to 250 | 200 to 250 |
| | **LCD** | 30 | 30 |
| | **Printer** | 100 | 100 |
| | **RV Air Conditioner - 13,500 BTU** | 1,800 | 2,800 |
| | **Vacuum Cleaner** | | |
| | **Upright** | 800 | 1,100 |
| | **Canister** | 1,100 | 1,500 |
| | **Garage Door Opener** | | |
| | **0.25 hp** | 550 | 1,100 |
| | **0.3 hp** | 725 | 1,400 |

| | Application | Approximate wattage required for running | Approximate wattage required for starting |
|---|---|---|---|
| WORK | **Air Compressor** | | |
| | **0.5 hp** | 1,000 | 2,000 |
| | **1 hp** | 1,500 | 4,500 |
| | **1.5 hp** | 2,200 | 6,000 |
| | **2 hp** | 2,800 | 7,700 |
| | **Bench Grinder** | | |
| | **6 in.** | 720 | 1,000 |
| | **8 in.** | 1,400 | 2,500 |
| | **10 in.** | 1,600 | 3,600 |
| | **Electric Cultivator - 0.3 hp** | 700 | 1,400 |
| | **Electric Hedge Trimmer - 18 in.** | 400 | 550 |
| | **Electric Grass Trimmer** | 500 | 650 |
| | **Drum Mixer - 0.25 hp** | 700 | 1,400 |
| | **Flood Lights - Mercury Hallogen** | 1,000 | 1,000 |
| | **Floor Polisher** | | |
| | **16 in. - 0.75 hp** | 1,400 | 3,100 |
| | **20 in. - 1 hp** | 1,600 | 4,500 |
| | **Power Hand Drill** | | |
| | **0.25 in.** | 350 | 350 |
| | **0.375 in.** | 400 | 400 |
| | **0.5 in.** | 600 | 600 |
| | **Submersible** | | |
| | **Water Pump 400 gpm** | 200 | 400 |
| | **Centrifugal. Type** | 500 | 650 |
| | **Wet/ Dry Vacuum** | | |
| | **1.7 hp** | 900 | 900 |
| | **2.5 hp** | 1,300 | 1,300 |
| | **Saws** | | |
| | **Worm Drive (chop saw)** | 1,800 | 2,600 |
| | **Band Saw** | 1,100 | 1,400 |
| | **Circular Saw** | | |
| | **6.5 in.** | 800 | 1,200 |
| | **7.25 in.** | 1,400 | 2,300 |
| | **8.25 in.** | 1,800 | 3,000 |
| | **Electric Chain Saw** | | |
| | **12 in. - 1.5 hp** | 900 | 1,100 |
| | **14 in. - 2 hp** | 1,100 | 1,400 |
| | **Table Saw** | | |
| | **1.7 hp** | 1,500 | 3,000 |
| | **2.5 hp** | 1,800 | 4,500 |
| | **Electric Welders** | | |
| | **70-amp** | 2,800 | 2,800 |
| | **100-amp** | 3,600 | 3,600 |
| | **200-amp** | 9,000 | 9,000 |
| | **Kango Hammer** | 900 | 1,200 |
| | **Farm Equipment** | | |
| | **Electric Fence (40 km/25 miles)** | 250 | 250 |
| | **Stock Tank De-icer** | 1,000 | 1,000 |
| | **Grain Cleaner** | 650 | 1,000 |
| | **Portable Conveyer - 0.5 hp** | 1,000 | 2,400 |
| | **Grain Elevator - 0.75 hp** | 1,400 | 3,000 |
| | **Milk Cooler** | 1,100 | 2,300 |
| | **Mixer - 3.25 cubic feet, 0.75 hp** | 2,800 | 7,700 |
| | **Milking Machine - 2 hp** | 1,000 | 2,300 |

***Note:*** *Check your equipment or appliance for actual wattage requirement.*

*Watts ÷ AMPS = Volts | Watts ÷ Volts = AMPS | Volts x AMPS = Watts*



# Inverter Series

**Compact and quiet, with the ability to power even the most sensitive electronic equipment.**



## Ultra-Quiet 1000i

EU1000iTC3/C4

- Lightweight and portable 13 kg (28.7 lb).
- Recommended for TVs, lights, fans, small power tools and more.
- Inverter, stable power of 1,000 watts, at 120 VAC.
- Up to 3 hours of power at maximum rated output, up to 7 hours at 25% output on a tank of gas.
- Parallel-connect capability with another EU1000i.



## Ultra-Quiet 2200i

EU2200iTC

- 2,200 watts of Honda inverter 120 VAC power.
- Honda GXR120, OHC, 4-stroke commercial series engine. The GXR120 provides superb durability and reliability.
- Whisper-quiet operation — 57 dB(A) at rated load, 48 dB(A) at 25% load.
- Easy to carry — 21.1 kg (46.5 lb).
- Double your power, connect it with a EU2200i Companion model for up to 4,400 watts maximum of power (3,600 watts rated).



## Ultra-Quiet 2200i Companion

EU2200iTC1 Companion

- 2,200 watts of Honda inverter 120 VAC power.
- Honda GXR120, OHC, 4-stroke commercial series engine. The GXR120 provides superb durability and reliability.
- Easy to carry — 21.1 kg (46.5 lb).
- Double your power, connect it with a EU2200i model for up to 4,400 watts maximum of power (3,600 watts rated).



## Ultra-Quiet 2200i GFCI

EB2200iTC

- 2,200 watts of Honda inverter 120 VAC power.
- Whisper-quiet operation — 57 dB(A) at rated load, 48 dB(A) at 25% load.
- Easy to carry — 21.1 kg (46.5 lb).
- GFCI Duplex Receptacle, Neutral Bonded.
- Ideal for jobsite applications, modern hot air furnaces, sensitive equipment and electronics.



## Ultra-Quiet 3200i

EU3200iC

- All-new GX130cc engine.
- New Eco-Throttle switch for greater fuel efficiency.
- Lightweight and portable - only 27 kg (59.5 lb).
- Bluetooth capable technology allows you to monitor and control features.



## Ultra-Quiet 3000i ES

EU3000isC4

- Powers most furnaces, fridges, microwaves, most 13,500 BTU/h RV AC units; great for RVing and more.
- Inverter — stable power of 3,000 watts, at 120 VAC.
- Up to 7.2 hours of power at maximum rated output, up to 20 hours at 25% output on a tank of gas.
- Electric start and back-up recoil start.



## Ultra-Quiet 7000i ES

EU7000isCT1

- Fuel injected — better fuel efficiency and lower maintenance.
- Inverter, stable power of 7,000 watts, at 120/240 VAC.
- Perfect for home and cottage back-up power, outdoor events and commercial worksites.
- Up to 6.5 hours of power at maximum rated output, up to 18 hours at 25% output on a tank of gas.
- Electric start and back-up recoil start.



# **Inverter Series** Specifications

| Specifications | Ultra-Quiet 1000i | Ultra-Quiet 2200i | Ultra-Quiet 2200i Companion | Ultra-Quiet 2200i GFCI | Ultra-Quiet 3200i | Ultra-Quiet 3000i ES | Ultra-Quiet 7000i ES |
|---|---|---|---|---|---|---|---|
| **Model Code** | EU1000iTC3/C4* | EU2200iTC† | EU2200iTC1 Companion† | EB2200iTC | EU3200iC | EU3000isC4 | EU7000isCT1 |
| **Generator Type** | Inverter | Inverter | Inverter | Inverter | Inverter | Inverter | Dual inverter |
| **Maximum AC Output (Watts)** | 1,000 | 2,200 | 2,200 | 2,200 | 3,200 | 3,000 | 7,000 |
| **AC Voltage Available** | 120 | 120 | 120 | 120 | 120 | 120 | 120 / 240 |
| **Maximum Continuous AC Output (Watts)** | 900 | 1,800 | 1,800 | 1,800 | 2,600 | 2,800 | 5,500 |
| **Max. Rated AC Amperage @ 120 V / 240 V** | 7.5 / - | 15 / - | 15.0 / - (30.0 / - in parallel operation) | 15.0 / - | 21.7 / - | 23.3 / - | 45.8 / 22.9 |
| **Ground Fault Circuit Interrupter (GFCI)** | N/A | N/A | N/A | Standard | N/A | N/A | N/A |
| **Frequency (Hertz)** | 60 | 60 | 60 | 60 | 60 | 60 | 60 |
| **Automatic Voltage Regulator** | Standard | Standard | Standard | Standard | Standard | Standard | PWM (Pulse Width Modulation) |
| **DC Output Volts / Amps** | 12 / 6.5 | 12 / 8.3 | N/A | N/A | N/A | 12 / 8.3 | N/A |
| **Common Duplex Receptacle Specifications** | 7.5 amps/120 VAC continuous is available as combined total from these two AC receptacles. | 15.0 amps/120 VAC continuous is available as combined total from these two AC receptacles. | N/A | 15.0 amps/120 VAC continuous is available as combined total from these two AC GFCI receptacles. | 21.7 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps is available from a single receptacle. | 23.3 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps is available from a single receptacle. | 40 amps/120 VAC continuous is available as combined total from these two AC receptacles. Maximum of 20 amps available from a single receptacle. |
| **DC Receptacle Specifications** | 6.5 amps/12 VDC is available from this receptacle. **Important Note:** AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type. | 8.3 amps/12 VDC is available from this receptacle. **Important Note:** AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type. | N/A | N/A | N/A | 8.3 amps/12 VDC is available from this receptacle. **Important Note:** AC and DC output cannot be used simultaneously. DC system uses floating N (Neutral) type. | N/A |
| **DC Charging Cable** | Standard | Standard | N/A | N/A | N/A | Standard | N/A |
| **High Capacity 120, 120 / 240 VAC Twist Lock Receptacle Specifications** | N/A | N/A | This receptacle (NEMA # L5-30R) will supply 30.0 amps at 120 VAC continuously in parallel operation. | N/A | This receptacle (NEMA # L5-30R) will supply 23.3 amps at 120 VAC continuously. | This receptacle (NEMA # L5-30R) will supply 23.3 amps at 120 VAC continuously. | This receptacle (NEMA # L14-30R) will supply 22.9 amps at 240 VAC and 45.8 amps at 120 VAC continuously. |
| **Engine Type** | Honda GXH50T OHV, 4-stroke, air-cooled | Honda GXR120T, OHC, 4-stroke, air-cooled | Honda GXR120T, OHC, 4-stroke, air-cooled | Honda GXR120T, OHC, 4-stroke, air-cooled | Honda GX130 OHV, 4-stroke, air-cooled | Honda GX200T2 OHV, 4-stroke, air-cooled | Honda GX390T2 OHV, 4-stroke, air-cooled |
| **Displacement** | 49.4 cc | 121 cc | 121 cc | 121 cc | 130 cc | 196 cc | 389 cc |
| **Starting System** | Manual recoil | Manual recoil | Manual recoil | Manual recoil | Recoil/full transistor | Electric/recoil | Electric/recoil |
| **Low Level Oil Alert™ System** | Standard | Standard | Standard | Standard | Standard | Standard | Standard (LED display) |
| **Auto Throttle** | Eco-Throttle™ standard | Eco-Throttle™ standard | Eco-Throttle™ standard | Eco-Throttle™ standard | Eco-Throttle™ standard | Eco-Throttle™ standard | Eco-Throttle™ standard |
| **Remote Start Capability** | No | No | No | No | No | No | Optional |
| **Fuel Tank Capacity** | 2 litres (0.44 Imp. gal.) | 3.6 litres (0.79 Imp. gal.) | 3.6 litres (0.79 Imp. gal.) | 3.6 litres (0.79 Imp. gal.) | 4.6 litres (1.01 Imp. gal.) | 13 litres (2.86 Imp. gal.) | 19.2 litres (4.22 Imp. gal.) |
| **Transport Wheels** | N/A | N/A | N/A | N/A | N/A | Optional wheel kits: 4-wheels, same size: P/N 06423-ZS9-T30 4-wheels, large RR & front swivel/locking wheels: P/N 06424-ZS9- 000AH 2-wheels with telescoping handles: P/N 06425-ZS9-020AH | 2-wheel kit standard |
| **Lifting Hook** | N/A | N/A | N/A | N/A | N/A | N/A | Optional (P/N 06531-Z11- E00ZA) |
| **Battery** | N/A | N/A | N/A | N/A | N/A | Standard (P/N 31500-HN1-003AH) | Standard (P/N 31500-MCR-D02AH) |
| **Approximate Running Time (hrs.) / Tankful** | 3** / 7*** | 3.2** / 8.1*** | 3.2** / 8.1*** | 3.2** / 8.1*** | 3.3** / 8.6*** | 7.2** / 20*** | 6.5** / 18 *** |
| **Rated Fuel Consumption (litres/hr)** | 0.67** | 1.14** | 1.14** | 1.14** | 1.43** | 1.78** | 2.95** |
| **Noise Level dB(A) (1.5 m to 7 m)** | 57** / 52*** | 57** / 48*** | 57** / 48*** | 57** / 48*** | TBD | 58** / 48*** | 60** |
| **Length (Without Handles and Wheels)** | 451 mm (17.8 in.) | 509 mm (20 in.) | 509 mm (20.0 in.) | 509 mm (20.0 in.) | 571 mm (22.5 in.) | 655 mm (25.8 in.) | N/A |
| **Length (With Handles and Wheels)** | N/A | N/A | N/A | N/A | N/A | N/A | 1,198 mm (47.2 in.) |
| **Width (Without Handles and Wheels)** | 242 mm (9.5 in.) | 290 mm (11.4 in.) | 290 mm (11.4 in.) | 290 mm (11.4 in.) | 306 mm (12.0 in.) | 445 mm (17.5 in.) | 539 mm (21.2 in.) |
| **Width (With Handles and Wheels)** | N/A | N/A | N/A | N/A | N/A | N/A | 700 mm (27.6 in.) |
| **Height (Without Lift-Hook)** | 379 mm (15 in.) | 425 mm (16.7 in.) | 425 mm (16.7 in.) | 425 mm (16.7 in.) | 452 mm (17.8 in.) | 555 mm (21.9 in.) | 721 mm (28.4 in.) |
| **Height (With Lift-Hook)** | N/A | N/A | N/A | N/A | N/A | N/A | 821 mm (32.3 in.) |
| **Dry Weight** | 13 kg (28.7 lb) | 21.1 kg (46.5 lb) | 21.1 kg (46.5 lb) | 21.1 kg (46.5 lb) | 27 kg (59 lb) | 59 kg (130 lb) | 118.1 kg (260.4 lb) |
| **Cold Climate Technology™** | Standard | Standard | Standard | Standard | Standard | Standard | Standard |

NEMA L5-30R 30 Amp 1-120 VAC | NEMA L14-20R 20 Amp 1-120/240 VAC | NEMA L14-30R 30 Amp 1-120/240 VAC | CS6364/5 50 Amp 1-120/240 VAC

**Two EU1000i units in parallel: 15 amps/120 volts continuous is available from the 20 amp T-slot receptacle. Note: 16.6 amps is available for approx. 30 min. †Optional parallel operation cable (part number: 08E93-HPK-123HI) required for parallel connectivity. Maximum continuous output in parallel operation is 3600 watts or 30 amps @ 120 VAC. **At max. rated output (continuous) in Watts. ***At 25% rated output (continuous) in Watts.*

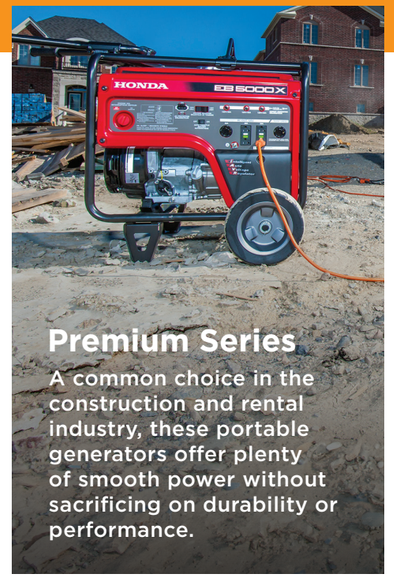

## Premium Series

A common choice in the construction and rental industry, these portable generators offer plenty of smooth power without sacrificing on durability or performance.



### Electric Start 5000

EM5000S3CT2

- Perfect for home backup or commercial usage with convenient 12 VDC electric start and manual recoil start as back-up.
- 5,000 watts of power in dual-voltage configuration.
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power.
- 23.5-litre fuel tank provides up to 8.1 hours of continuous power at maximum rated output, or up to 11.2 hours at 50% output.
- Auto-throttle further extends running time by automatically adjusting engine speed to idle when no load is applied.



### Electric Start 6500

EM6500S2CT2

- Perfect for home back-up or commercial usage with convenient 12 VDC electric start and manual recoil start as back-up.
- 6,500 watts of power in dual-voltage configuration.
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power.
- 23.5-litre fuel tank provides up to 6.9 hours of continuous power at maximum rated output, or up to 10.4 hours at 50% output.
- Auto-throttle further extends running time by automatically adjusting engine speed to idle when no load is applied.



### Commercial 5000 GFCI

EM5000S3CT2

- Designed for the rigours of daily commercial usage and rental applications.
- 5,000 watts of power in dual-voltage configuration with GFCI protection.
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power.
- 23.5-litre fuel tank provides up to 8.1 hours of continuous power at maximum rated output, or up to 11.2 hours at 50% output.
- Hanger kit/lifting eye for easier moving around the job site.



### Commercial 6500 GFCI

EB6500XC2

- Designed for the rigours of daily commercial usage and rental applications.
- 6,500 watts of power in dual-voltage configuration with GFCI protection.
- Exclusive Intelligent Auto Voltage Regulation (iAVR) offers stable power delivery and increased wattage of 7,000 watts for 10 seconds for reactive power.
- 23.5-litre fuel tank provides up to 6.9 hours of continuous power at maximum rated output, or up to 10.4 hours at 50% output.
- Hanger kit/lifting eye for easier moving around the job site.



### Commercial 10000 GFCI ES

EB10000C1

- Designed for the rigours of daily industrial/ commercial usage and rental applications.
- 10,000 watts of power in dual-voltage configuration with GFCI protection.
- Convenient 12 VDC electric start.
- Honda exclusive Digital Auto Voltage Regulator (DAVR) offers stable power delivery for increased performance.
- 31-litre fuel tank provides up to 6.5 hours of continuous power at maximum rated output, or up to 8.5 hours at 50% output.
- Auto-throttle further extends running time by automatically adjusting engine speed to idle when no load is applied.
- Hanger kit/lifting eye, wheel kit with folding handle for easier moving around the job site.



# **Premium Series** Specifications

| Specifications | Electric Start 5000 | Electric Start 6500 | Commercial 5000 GFCI | Commercial 6500 GFCI | Commercial 10000 GFCI ES |
|---|---|---|---|---|---|
| **Model Code** | EM5000S3CT2 | EM6500S2CT2 | EB5000X3CT2 | EB6500XCT2 | EB10000C1 |
| **Generator Type** | Brush type | Brush type | Brush type | Brush type | Brush type |
| **Maximum AC Output (Watts)** | 5,000 | 6,500 | 5,000 | 6,500 | 10,000 |
| **AC Voltage Available** | 120 / 240 | 120 / 240 | 120 / 240 | 120 / 240 | 120 / 240 |
| **Maximum Continuous AC Output (Watts)** | 4,500 7,000 (iAVR) | 5,500 7,000 (iAVR) | 4,500 7,000 (iAVR) | 5,500 7,000 (iAVR) | 9,000 |
| **Max. Rated AC Amperage @ 120 V / 240 V** | 37.5 / 18.8 (58.3 / 29.2 for 10 sec. iAVR) | 45.8 / 22.9 (58.3 / 29.2 for 10 sec. iAVR) | 37.5 / 18.8 (58.3 / 29.2 for 10 sec. iAVR) | 45.8 / 22.9 (58.3 / 29.2 for 10 sec. iAVR) | 37.5 x 2 (75) / 37.5 |
| **Ground Fault Circuit Interrupter (GFCI)** | N/A | N/A | Standard | Standard | Standard |
| **Frequency (Hertz)** | 60 | 60 | 60 | 60 | 60 |
| **Automatic Voltage Regulator** | Standard iAVR (Intelligent Automatic Voltage Regulator) | Standard iAVR (Intelligent Automatic Voltage Regulator) | Standard iAVR (Intelligent Automatic Voltage Regulator) | Standard iAVR (Intelligent Automatic Voltage Regulator) | Standard DAVR (Digital Automatic Voltage Regulator) |
| **DC Output Volts / Amps** | 12 / 8 | 12 / 8 | N/A | N/A | N/A |
| **Common Duplex Receptacle Specifications** | 37.5 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. | 40 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 20 amps available from each GFCI duplex receptacle. | 37.5 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 18.8 amps available from each GFCI duplex receptacle. | 40 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 20 amps available from each GFCI duplex receptacle. | 40 amps/120 VAC continuous is available as combined total from these twin duplex AC receptacles. Maximum of 20 amps available from each GFCI duplex receptacle. |
| **DC Receptacle Specifications** | 8 amps/12 VDC is available from these +/- thumb screw terminals. **Important Note:** AC and DC output can be used simultaneously on this series only. DC system uses floating N (Neutral) type. | 8 amps/12 VDC is available from these +/- thumb screw terminals. **Important Note:** AC and DC output can be used simultaneously on this series only. DC system uses floating N (Neutral) type. | N/A | N/A | N/A |
| **DC Charging Cable** | Optional (P/N 32650-825-015) | Optional (P/N 32650-825-015) | N/A | N/A | N/A |
| **High Capacity 120, 120 / 240 VAC Twist Lock Receptacle Specifications** | NEMA#L5-30R 30 Amp 1-120 VAC; NEMA#L14-20R 20 Amp 1-120/240 VAC; NEMA#L14-30R 30 Amp 1-120/240 VAC; CS6364/5 50 Amp 1-120/240 VAC | NEMA#L5-30R 30 Amp 1-120 VAC; NEMA#L14-20R 20 Amp 1-120/240 VAC; NEMA#L14-30R 30 Amp 1-120/240 VAC; CS6364/5 50 Amp 1-120/240 VAC | This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 18.8 amps (4.5 kVA) at 240 VAC continuously. | This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 22.9 amps (5.5 kVA) at 240 VAC continuously. | This receptacle (NEMA # L5-30R) will supply 30 amps at 120 VAC continuously. This receptacle (NEMA # L14-30R) will supply 30 amps at 120/240 VAC continuously. This receptacle (CS6364/5) will supply 37.5 amps (9 kVA) at 240 VAC or 50 amps (6 kVA) at 120 VAC continuously. |
| **Engine Type** | Honda iGX390T2 OHV, 4-stroke, air-cooled | Honda iGX390T2 OHV, 4-stroke, air-cooled | Honda iGX390T2 OHV, 4-stroke, air-cooled | Honda iGX390T2 OHV, 4-stroke, air-cooled | Honda GX630H OHV, 90° V-Twin design, 4-stroke, air-cooled |
| **Displacement** | 389 cc | 389 cc | 389 cc | 389 cc | 688 cc |
| **Starting System** | Electric/recoil | Electric/recoil | Manual recoil | Manual recoil | Electric |
| **Low Level Oil Alert™ System** | Standard | Standard | Standard | Standard | Standard |
| **Auto Throttle** | Standard | Standard | Standard | Standard | Standard |
| **Remote Start Capability** | Optional | Optional | No | No | No |
| **Fuel Tank Capacity** | 23.5 litres (5.17 Imp. gal.) | 23.5 litres (5.17 Imp. gal.) | 23.5 litres (5.17 Imp. gal.) | 23.5 litres (5.17 Imp. gal.) | 31 litres (6.82 Imp. gal.) |
| **Transport Wheels** | 2 Wheel standard | 2 Wheel standard | 2 Wheel standard | 2 Wheel standard | 2 Wheel standard |
| **Lifting Hook** | Optional (P/N 06810-Z22-A30ZA) | Optional (P/N 06810-Z22-A30ZA) | Standard | Standard | Standard |
| **Battery** | Standard (P/N 31500-MCR-J01) | Standard (P/N 31500-MCR-J01) | N/A | N/A | Standard |
| **Approximate Running Time (hrs.) / Tankful** | 8.1** / 11.2**** | 6.9** / 10.4**** | 8.1** / 11.2**** | 6.9** / 10.4**** | 5.4** / 7.9**** |
| **Rated Fuel Consumption (litres/hr)** | 2.90** | 3.40** | 2.90** | 3.40** | 4.77** |
| **Noise Level dB(A) (1.5 m to 7 m)** | 72** | 73** | 72** | 73** | 72** |
| **Length (Without Handles and Wheels)** | 681 mm (26.8 in.) | 681 mm (26.8 in.) | 681 mm (26.8 in.) | 681 mm (26.8 in.) | 973 mm (38.3 in.) |
| **Length (With Handles and Wheels)** | 1,043 mm (41.1 in.) | 1,051 mm (41.4 in.) | 1,043 mm (41.1 in.) | 1,051 mm (41.4 in.) | 1,420/1,041† mm (55.1/41† in.) |
| **Width (Without Handles and Wheels)** | 530 mm (20.9 in.) | 530 mm (20.9 in.) | 530 mm (20.9 in.) | 530 mm (20.9 in.) | 552 mm (21.7 in.) |
| **Width (With Handles and Wheels)** | 706 mm (27.8 in.) | 706 mm (27.8 in.) | 706 mm (27.8 in.) | 706 mm (27.8 in.) | 703 mm (27.7 in.) |
| **Height (Without Lift-Hook)** | 719 mm (28.3 in.) | 719 mm (28.3 in.) | 719 mm (28.3 in.) | 719 mm (28.3 in.) | 695 mm (27.4 in.) |
| **Height (With Lift-Hook)** | 773 mm (30.4 in.) optional lift hook | 773 mm (30.4 in.) optional lift hook | 773 mm (30.4 in.) standard | 773 mm (30.4 in.) standard | 891 mm (35.1 in.) standard |
| **Dry Weight** | 102.2 kg (225.3 lb) | 104.8 kg (231 lb) | 94.6 kg (208.6 lb) | 97.2 kg (214.3 lb) | 183 kg (403.4 lb) |
| **Cold Climate Technology™** | Standard | Standard | Standard | Standard | Standard |

***At max. rated output (continuous) in Watts. ***At 25% rated output (continuous) in Watts.*
*****At 50% rated output (continuous) in Watts. †Indicates handles in folded down position.*




FPO FSC

E25PEGENBR

Honda Canada Outdoors @HondaPowersports-OutdoorCanada @HondaOutdoors

For optimum performance and safety, please read your owner's manual thoroughly before operating your Honda Power Equipment product. Specifications subject to change without notice. Models and colours may not be exactly as shown. Errors and omissions excepted. See your Honda Power Equipment retailer or honda.ca for full details. TMs – Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd.

Printed in Canada, 2025.

HONDA

POWER EQUIPMENT

powerequipment.honda.ca