



GIANT 3500 Rock Picker

- Rugged 6' wide reel type rock picker with large 3.5 cubic yard (3.68 M³) hopper.
- Durable tapered T-iron grate with 1-1/2" (38mm) thick teeth eliminates jamming and allows soil to sift through for clean picking.
- Batt tubing has 1/2" thick walls, wrap around, 450 BHN steel hard surfaced batt teeth offer strength and wear resistance.
- Large heavy wire springs hold batts firmly in position and cushion shock loads. Spring coil diameter is reduced at the ends to minimize the possibility of breaking the spring hooks.
- Floating grate protects the machine from damage due to large immovable rocks.
- Pivoting hitch pole allows the rock picker to be quickly moved from the offset picking position to a centered transport position.



World Class *Built to Last*

schulte.ca

Specifications

SPECIFICATIONS

Working Width	72" (1,829mm)
Overall Length	205" (5207 mm)
Transport Width	126" – 135" (3200 – 3430mm)
Overall Height	81" (2057mm)
Weight	6210 lbs (2,820 kgs)
Hitch Weight	1000lbs (454kgs)
Hopper Capacity	3.5 cu.yd (2.68 cu m)
Dumping Height	49" (1245mm)
Tire Size Standard	16.5L X 16.5
Tire Size Large	560/45R22.5
Minimum Tractor Size	75 HP (56Kw)
Tractor Hydraulic Requirements	12 GPM 1800 PSI Dual Remote
Crossover relief valve	1750 PSI Cracking Pressure
Hydraulic Motor Displacement	24.0 cuin/rev
Final Drive Ratio	2.46:1
Drive Sprockets	13T and 32T #80
Recommended Reel Speed	36-37 RPM
Maximum Ground Speed	4 MPH (6.4 KPH)
Rock size capacity	2"-27" (5cm-69cm)

GIANT-3500



Hose Organizer



49" (1245mm) dumping height



Lock head batt pivot pins



Large 3.5 cu.yd (2.68 cu m) hopper and extra wide 72" picking width



A hydraulic drive system provides a cushioned drive that can be easily reversed to free jammed rocks.




Batt tubing has 1/2" thick walls and wrap around, 5/8" 450 BHN hard-surfaced teeth. The heavy batt weight creates momentum reducing spring tripping



Standard 16.5L X 16.5 and even larger 560/45R22.5 tires offer superior flotation under heavy loads



Extra heavy duty batt springs 450 BNH steel reel

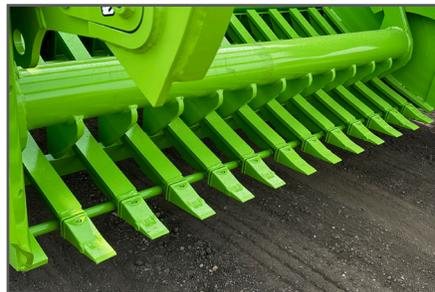

Replaceable teeth and 450 BHN Grate



The longer, bent hitch pole improves operator visibility, from the cab window

OPTIONS

Narrow Grate 1 1/2" spacing, Wide Grate 3 9/32" spacing, Standard Hydraulics, Hydraulics with Flow Control Kit, Hydraulic Swing Hitch, Safety Light Kit
Wheel option with 16.5 x16.1x10 ply / standard side deflector, Larger wheel option 560/45x22.5, 152 D Load Index / Large side deflector.

SCHULTE

Schulte Industries Ltd.

PO Box 70, Englefeld, SK Canada S0K 1N0

Ph (306) 287-3715 Fx (306) 287-3355

Email info@schulte.ca Web www.schulte.ca

MEMBER OF THE
ALAMO GROUP
ALWAYS ON THE CUTTING EDGE.

Certified System
ISO 9001

Sold By:

Schulte is a registered trademark of Alamo Group Inc.

Schulte Industries Ltd. reserves the right to change the design and specifications of its products without notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.

Printed in Canada

21/02/25

