



PLOW PARTNER

THE PLOW

Attached using a height-adjustable 2" X 2" trailer hitch mount, the Plow Partner offers an independent power unit that is mounted to the plow lift frame. This means no sharing of the plow pump for pressure. Operated with a two-button pendant control in the cab.

SPECIAL FEATURES

- 1/4 ton truck and larger
- Having a front and rear mounted plow will save you turn around time, resulting in less time on each site
- 2000 pounds of down pressure gives you a clean scrape, resulting in less salt application
- Adjustable height trailer hitch mount
- All Steel is hot dip galvanized for superior corrosion resistance

QUICK SPECS PP96



96" Blade Width

20" Blade Height

12Ga Steel

358lbs Weight

5" Steel Cutting Edge

2" x 2" Hitch Class

Front to back Galvanized

DETAILED SPECIFICATIONS

PLOW MODEL	PP84	PP90	PP96
Blade Width	84"	90"	96"
Blade Height	20"		
Blade Skin	12 Ga Steel		
Approximate Weight	340lbs	329lbs	358lbs
Lift Cylinders	1.5" x 5" Dual Acting		
Mounting Type	2" x 2" Hitch Class III or better		
Cutting Edge	3/8" x 5" Steel		




Vehicles intended to be equipped with Arctic equipment must comply with the vehicle manufacturers specification for equipment application.

Please consult your vehicle dealer before purchases and installation of any products mentioned in the brochure. The purchaser assumes all vehicle risk associated with the attachment and operation of Arctic equipment.

The weight given is approximate and does not include the mounting kit, lights, shoes, or hyd. jack.

Arctic reserves the right to change specifications without prior notification.

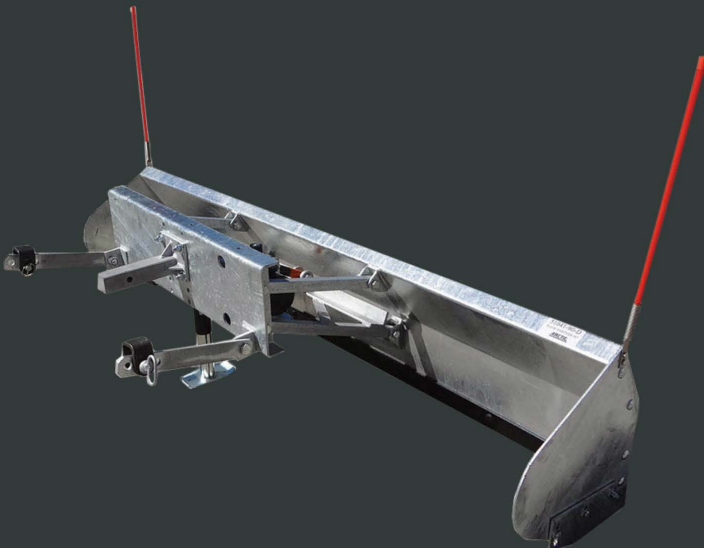

ARCTIC
SNOWPLOWS • SPREADERS