


UTILITY V

Function is what the Utility V series is all about. They are built as tough as can be to stand up to the rigors of years of hard use. Popular with boat liveries and resorts they are very low maintenance. Cross ribs are spaced every 10" and strong transom bracing along with rigid tank seats insure a very strong and safe hull. All interiors are finished in a non-glare, non-slip finish and all models feature transom carry handles. Models range from 12'-16' and these boats have max horsepower ratings that range from 10 to 25 hp.



F	EATURES	3654/3696	4650/4656	4604	4602	4652	1236/1436
Livewell	43 Quart Livewell (21"L x 15"W x 10"D)	•					
Storage	Split Bench	•					
Sto	Full Bench	•	•	•	•	•	•
Paint	Interior	•	•	•	•	•	•
Pa	Exterior	•	•	•	•	•	•
	Oar Locks	V	•	•	•	•	•
	Stern Grab Handles	•	•	•	•	•	•
tures	Bow Storage	•					
General Features	Vinyl Flat Floor	•					
	Deluxe Graphics	•	•	•	•	•	
	Level Flotation	•	•	•	•	•	•
	Olive Drab Green						•
		• Sta	Standard			Optio	onal

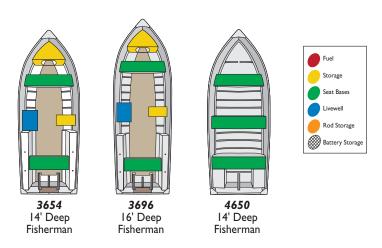





12' Resorter




4604 14' Resorter



	4652
2'	Sportsman

OPTIONS	3654/3696	4650/4656	4604	4602	4652
Sliding Bench Seat Hardware	•	~	•	1	~
Navigation Light Kit	1	1	~	~	~
Steering Console	•	~	•	~	
Mooring Cover	•	~			
Livewell Aeration	1				
Extra Seat w/Base	~				



1236 12' Predator



14' Predator

Model	3654	3696	4650	4656	4602	4604	4652	1236	1436
Length	14' 2"	16' 0"	14' 2"	16' 0"	12' 2"	14' 1"	12' 0"	11' 11"	13' 9"
Beam	64"	64"	64"	64"	58"	58"	53"	52"	52"
Bow Depth	30"	30"	30"	30"	27"	27"	23"	15"	15"
Transom Height	15"/20"	15"/20"	15"/20"	15"/20"	15"	15"	15"	15"	15"
BIA Max. H.P.	25 HP	25 HP	25 HP	25 HP	I5 HP	I5 HP	I0 HP	I5 HP	I5 HP
BIA Capacity/Persons	920#/4	1100#/4	950#/5	1120#/6	680#/3	835#/4	500#/2	375#/2	565#/3
Approx.Weight	290#	343#	195#	243#	145#	175#	110#	135#	165#
Alum. Side Thickness	.063	.063	.051	.063	.051	.051	.051	.063	.063
Alum. Bottom Thickness	.063	.063	.051	.063	.051	.051	.051	.063	.063

US Coast Guard / NMMA Specifications