



BOSSPLOW.COM

See how BOSS continues to BACK YOU UP.
Get more info, watch videos, find a dealer or chat live.

Call 800-286-4155
Email sales@bossplow.com




Ask your dealer or visit bossplow.com to explore the complete lineup of BOSS products, including Truck Equipment, ATV/UTV Equipment, Heavy Equipment, Ice Control Equipment and Accessories.



Exclusive to BOSS Owners, joining this community gives you a profile page, a free gift and access to special offers and information on BOSS products and services.



SnowCare for Troops is a nationwide outreach program that performs free snow removal for the families of men and women serving overseas and disabled veterans.



BOSS PRODUCTS
2010 THE BOSS WAY
P.O. BOX 787
IRON MOUNTAIN, MI 49801-0787

BOSS SNOWFLOW PRODUCTS
ARE DESIGNED AND MANUFACTURED IN
AN APPROVED ISO 9001:2008
REGISTERED FACILITY.

Patents: www.ttcopats.com
©2017 BOSS PRODUCTS. ALL RIGHTS RESERVED.
PRINTED IN U.S.A. FORM #450B-2017 (UPDATED 7/17)

Hardox is a registered trademark of SSAB Technology. The "T" logo is a registered trademark/service mark of Facebook, Inc. The Twitter logo is a registered trademark/service mark of Twitter, Inc. The YouTube logo is a registered trademark/service mark of Google Inc. The Google+ logo is a service mark of Google Inc. The "in" logo is a registered service mark of LinkedIn Corporation. The Instagram logo is a registered trademark/service mark of Instagram, LLC. The Blogger logo is a registered service mark of Google Inc. The National IPA logo is a service mark of the National Intergovernmental Purchasing Alliance Company. The Advantage International Registrar logo is a trademark of Advantage International Registrar, Inc. All other trademarks belong to BOSS Snowplow.



TRUCK EQUIPMENT 2017

SNOWPLOWS & SPREADERS





2

3

Everything we do at BOSS comes back to one goal: giving snow and ice removal professionals everything they need to RESTORE ORDER when winter weather brings chaos. That's why we never stop pushing our designs, engineering and innovations to help make your job easier and more productive. Because at BOSS, our promise is that we will always be there to BACK YOU UP.

BOSS Products, a division of The Toro Company, reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used herein.

TABLE OF CONTENTS

4	BOSS Innovations	14	Standard-Duty	24	Forge Hopper Spreader
6	DXT	16	Super-Duty	26	TGS Tailgate Spreaders
8	XT	18	Trip-Edge	28	Accessories
10	EXT	20	Heavy-Duty	34	Specifications
12	HTX	22	VBX Hopper Spreaders		

INNOVATING FOR THE WAY YOU WORK

When winter is at its worst, the job calls for more than muscle, which is why BOSS engineers smart, tough, innovative solutions to make snow and ice removal fast, easy and efficient. With a variety of snow and ice control technologies and features to make your job more productive, BOSS has what today's professionals need to take on winter and RESTORE ORDER.



A NEW ERA IN PLOW LIGHTING
Plow in a whole new light with best-in-class 100% LED lighting, integrated with Ice Shield Technology™ to prevent snow and ice build-up on the lens. Comes standard on all BOSS truck plows.



ATTACH WITH EASE
Attach your plow in just three easy steps with the easy to use SmartHitch® 2 attachment system.



SUPERIOR CONTROL OPTIONS
Our high-tech, ergonomic controls feature large, backlit buttons for ease of use.



HEAVY-DUTY TOP SCREEN

TARP WITH INTEGRAL TIE-DOWNS

POLY HOPPER
Built to outlast the elements.

DUAL WORKLIGHTS

REAR-MOUNTED LIGHT SWITCH


TWO STANDARD VIBRATORS
(auger only)

SEALED MOTOR COMPARTMENT

PINTLE CHAIN OR AUGER FEED SYSTEM
Features either a heavy-duty pintle chain or mild steel helical auger for long life and reliability.

REAR-MOUNTED DUMP SWITCH

¾ HORSEPOWER HIGH TORQUE STAINLESS STEEL MOTOR

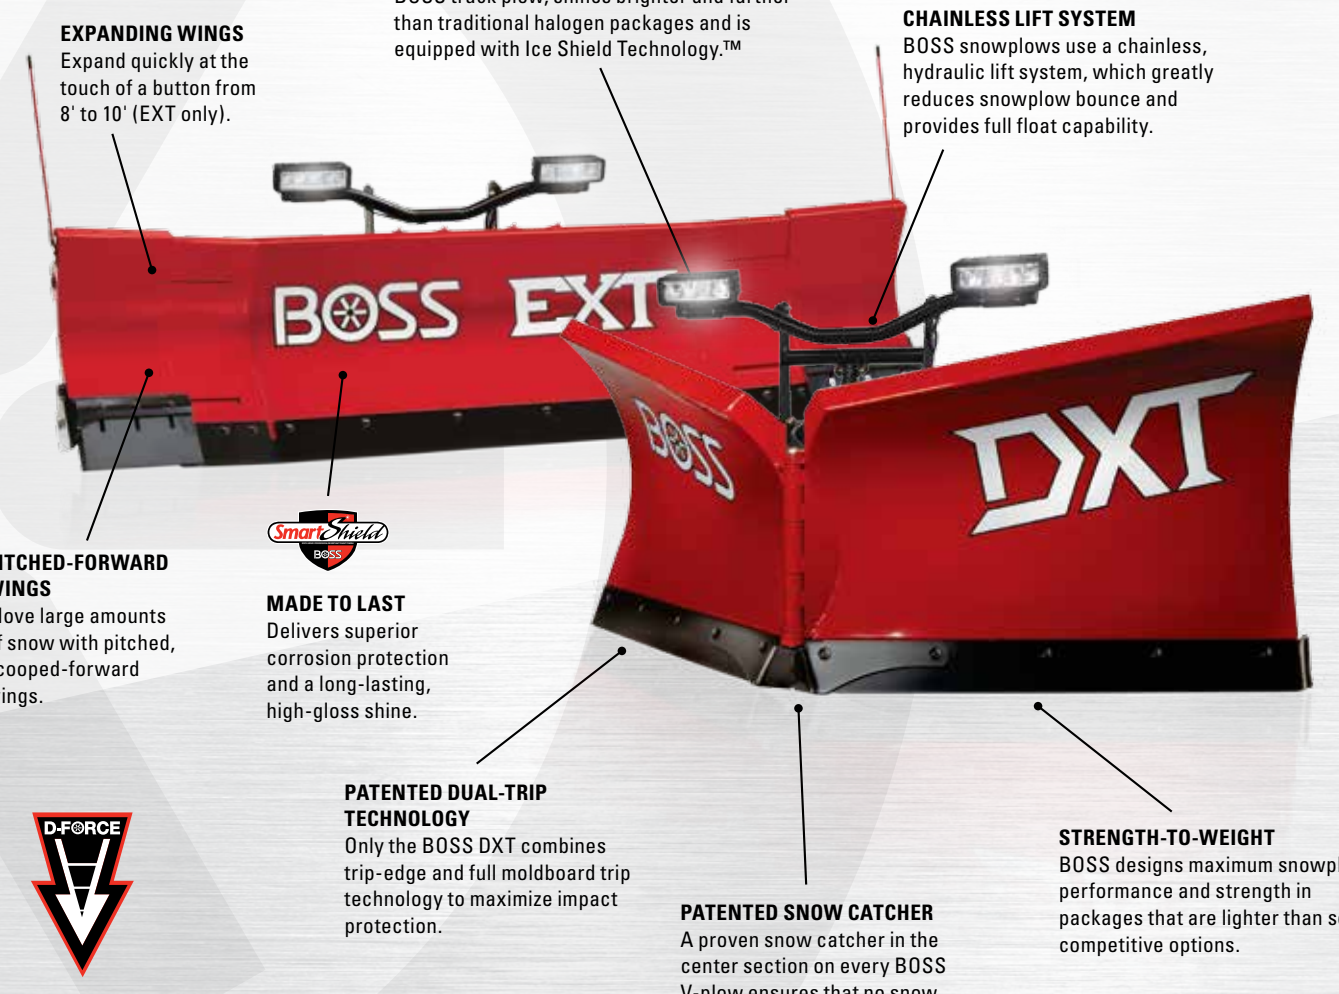

EXPANDING WINGS
Expand quickly at the touch of a button from 8' to 10' (EXT only).

SMARTLIGHT™ 3 HEADLIGHT PACKAGE
The SL3 headlight package, standard on every BOSS truck plow, shines brighter and farther than traditional halogen packages and is equipped with Ice Shield Technology.™

CHAINLESS LIFT SYSTEM
BOSS snowplows use a chainless, hydraulic lift system, which greatly reduces snowplow bounce and provides full float capability.

PITCHED-FORWARD WINGS
Move large amounts of snow with pitched, scooped-forward wings.

MADE TO LAST
Delivers superior corrosion protection and a long-lasting, high-gloss shine.

PATENTED DUAL-TRIP TECHNOLOGY
Only the BOSS DXT combines trip-edge and full moldboard trip technology to maximize impact protection.

PATENTED SNOW CATCHER
A proven snow catcher in the center section on every BOSS V-plow ensures that no snow lines are left behind.

STRENGTH-TO-WEIGHT
BOSS designs maximum snowplow performance and strength in packages that are lighter than some competitive options.



D-Force maintains consistent hydraulic down force through the use of a hydraulic accumulator to improve scraping performance while backdragging. D-Force is an optional accessory on new truck plow purchases. Available for select Straight-Blade truck plow models including Super-Duty and HTX Straight-Blade plows. (Excludes EXT, Heavy-Duty and Trip-Edge plows.)

BACKDRAG EDGES
Available accessory on Straight-Blade plows. (Excludes 9' and 10' Heavy-Duty, Trip-Edge and EXT plows.) Complementary accessory to D-Force, backdrag edges improve scraping performance when backdragging.

FLEET-FLEXIBLE UNDERCARRIAGE
The enhanced fleet flexibility comes from the RT3 Undercarriage, allowing you to quickly and easily swap between snowplows in your BOSS fleet.

PRO-LID

Weather-sealed, polyethylene hard cover protects deicing material inside the VBX Spreader. The BOSS Pro-Lid can be opened while remaining on the ground with most vehicles. (Available as an accessory on VBX Spreaders: VBX 6500, VBX 8000 and VBX 9000 only.)



PRE-WET

Allows contractors to pre-wet solid deicing materials, improving the efficiency of solid deicing materials. Equipped with a 60-gallon tank capacity, this system is available as an option on all new VBX and Forge Spreaders.



*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.

LEARN MORE ABOUT BOSS PRODUCTS
BOSSPLOW.COM



DXT

FULLY FEATURED AND FULLY TOUGH

The durable, fully featured BOSS DXTs are the ultimate tools to fight all things snow and ice. Dual-trip design enhances plow protection when striking obstacles in any position. Flared wings with an enhanced curl throw snow with maximum efficiency and the DXT's multi-position plow blade can quickly and easily switch positions to move large amounts of snow. The smooth running DXT is state of the art for plowing protection and performance.

STANDARD FEATURES:

- ▶ Steel 8'2", 9'2", 10' Poly 8'2", 9'2"
- ▶ Stainless Steel 8'2", 9'2"

- ▶ **Patented Dual-Trip Design** for enhanced plow protection when striking hidden obstacles in any position.
- ▶ **SmartLight™ 3** uses 100% LED lights with an 8-10 year life expectancy and Ice Shield Technology™ to prevent snow and ice build-up.
- ▶ **Chainless Hydraulic Cylinder Lifting System** greatly reduces bounce during transport and provides full float capability.
- ▶ **½" x 6" Long-Lasting, Durable Base Angle** to provide extended wear resistance and comes with built-in curb guards and patented snow catcher.
- ▶ **Flared Wings** with enhanced curl to throw snow with maximum efficiency.
- ▶ **Patented Snow Catcher** is designed to catch snow at the plow's pivot point, so no snow lines are left behind.
- ▶ **Reinforced Moldboard** increases blade rigidity for increased durability.
- ▶ **Heavy-Duty Push Frame and Center Section** for additional strength and reliability.
- ▶ **High-Performance Hydraulic Package** delivers reliability and speed.
- ▶ **Enclosed Hydraulics** protects against corrosion and hydraulic freeze-up.
- ▶ **SmartLock® Cylinders** lock blades in place when backdrugging.

▶ SEE IT IN ACTION
BOSSPLOW.COM



- ▶ Nearly double the light output of standard halogen systems.
- ▶ Life expectancy of 8 to 10 years.
- ▶ Ice Shield Technology™ heats the lens to prevent ice build-up.
- ▶ Standard on all BOSS truck plows.

9'2" Steel DXT – Also available in Poly and Stainless Steel



*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.



Patented Dual-Trip Design combines Trip-Edge and Full Moldboard Trip technologies on every DXT plow for protection from obstacles in any position, high or low.

PERFORMANCE IN EVERY PUSH

The BOSS XT is built to perform with innovative flared blade wings and an enhanced curl design that throws snow higher and farther than conventional plows. The superslick polyethylene surface of the Poly XT keeps snow from sticking. The durable steel plows feature a baked-on powder-coat paint finish with exclusive zinc primer to resist corrosion and outlast the elements. The BOSS XT is just another innovation helping you to RESTORE ORDER.

Steel 7'6", 8'2", 9'2"
Poly 8'2", 9'2"

STANDARD FEATURES:

QUESTIONS? CHAT LIVE ONLINE.
BOSSPLOW.COM

- > **Full Moldboard Trip Design** helps to prevent plow damage when an obstacle is encountered.
- > **SmartLight™ 3** uses 100% LED lights with an 8-10 year life expectancy and Ice Shield Technology™ to prevent snow and ice build-up.
- > **Chainless Hydraulic Cylinder Lifting System** greatly reduces bounce during transport and provides full float capability.
- > **½" x 6" Cutting Edge** built using Hardox® wear plate to provide extended wear resistance and comes with built-in curb guards and patented snow catcher.
- > **Patented Snow Catcher** is designed to catch snow at the plow's pivot point, so no snow lines are left behind.
- > **Reinforced Moldboard** increases blade rigidity for increased durability.
- > **Heavy-Duty Push Frame and Center Section** for additional strength and reliability.
- > **High-Performance Hydraulic Package** delivers reliability and speed.
- > **SmartLock® Cylinders** lock blades in place when backdragging.
- > **Enclosed Hydraulics** protects against corrosion and hydraulic freeze-up.

8'2" Poly XT – Also available in Steel



HARDOX®
WEAR PLATE

Hardox® cutting edge guarantees outstanding resistance to impact and extreme abrasion while delivering maximum service life and enhanced productivity.

SL3
ICE SHIELD TECHNOLOGY™

BOSS Smart Hitch 2

BOSS Smart Touch 2

SmartShield
BOSS

2
YEAR WARRANTY

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.

EXT

EXPAND PARKING LOT PRODUCTIVITY

The EXT is a popular, new innovation from BOSS, with expandable wings that enhance productivity and efficiency to put winter in its place. It plows at 8 feet for tighter cuts and expands to 10 feet with pitched-forward wings for optimal productivity, making it the perfect parking lot plow. The EXT is a versatile and flexible addition to your fleet and another powerful tool in your plowing arsenal that's built to BACK YOU UP.



STANDARD FEATURES:

➤ Steel 8' Retracted, 10' Expanded with Pitched-Forward Wings

- **Expandable, Fully Hydraulic, Pitched-Forward Wings** let you quickly and easily expand from 8' to 10' in width. A true 10' width combined with pitched-forward wings let the EXT take wider passes, carrying and moving more snow more efficiently.
- **SmartLight™ 3** uses 100% LED lights with an 8-10 year life expectancy and Ice Shield Technology™ to prevent snow and ice build-up.
- **Chainless Hydraulic Cylinder Lifting System** greatly reduces bounce during transport and provides full float capability.
- **Standing Tall and Strong** at 30 inches high with 9 vertical ribs, the EXT moves a high volume of snow with resilience.
- **Reinforced Moldboard** increases blade rigidity for increased durability.
- **Heavy-Duty Push Frame and Push Frame Attachment Bar** for additional strength and reliability.
- **High-Performance Hydraulic Package** delivers reliability and speed.
- **Enclosed Hydraulics** protects against corrosion and hydraulic freeze-up.

SEE HOW BOSS BACKS YOU UP.
BOSSPLOW.COM



*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.



➤ Easy to use controller



➤ 8' retracted



➤ 10' expanded



➤ Independent wing extension

HTX

FOR LIGHTER-DUTY TRUCKS WITH HEAVY WORKLOADS

Our full line of HTX plows brings all the power and innovation of BOSS full-size V-plows and Straight-Blades to your light-duty truck. With today's business owner and homeowner in mind, BOSS has engineered the HTX line for today's lighter-duty and half-ton trucks by putting just the right amount of steel in exactly the right place for the best combination of strength and weight. The precisely crafted, ultra-efficient HTX line is built to handle winter. Because when you need to RESTORE ORDER with your lighter-duty truck, BOSS is always there to BACK YOU UP.

12

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.

13

GET HELP SELECTING THE RIGHT BOSS PLOW FOR YOUR TRUCK.
BOSSPLOW.COM

D-Force maintains consistent hydraulic down force through the use of a hydraulic accumulator to improve scraping performance while backdragging. D-Force is an optional accessory on new truck plow purchases. Available for select Straight-Blade truck plow models including Super-Duty and HTX Straight-Blade plows. (Excludes EXT, Heavy-Duty and Trip-Edge plows.)



7'6"
V-Plow Steel

7', 7'6"
Poly

7', 7'6"
Steel

7', 7'6"
Stainless Steel

Steel V-Plow 7'6"
Poly, Steel Straight-Blade 7', 7'6"

Stainless Steel Straight-Blade 7', 7'6"

STANDARD FEATURES:

- > **Full Moldboard Trip Design** helps to prevent plow damage when an obstacle is encountered.
- > **SmartLight™ 3** uses 100% LED lights with an 8-10 year life expectancy and Ice Shield Technology™ to prevent snow and ice build-up.
- > **Chainless Hydraulic Cylinder Lifting System** greatly reduces bounce during transport and provides full float capability.
- > **Strong, Durable Push Frame and Attachment Bar** designed for additional strength and reliability.
- > **High-Performance Hydraulic Package** delivers reliability and speed.
- > **Enclosed Hydraulics** protects against corrosion and hydraulic freeze-up.



STANDARD-DUTY

THE TRIED AND TRUSTED STRAIGHT-BLADE

BOSS Standard-Duty Straight-Blade Plows get the job done right. A baked-on powder-coat paint finish with zinc primer resists corrosion. Heavy-duty push frame and push frame attachment bar, optimized blade curl and reinforced moldboard are standard on every BOSS Straight-Blade. These plows RESTORE ORDER with unsurpassed reliability and strength. The BOSS Standard-Duty is a tried, trusted, powerful tool from BOSS that's built to BACK YOU UP.

14

15

STANDARD FEATURES:

➤ Steel 7'6"

- **Full Moldboard Trip Design** helps to prevent plow damage when an obstacle is encountered.
- **SmartLight™ 3** uses 100% LED lights with an 8-10 year life expectancy and Ice Shield Technology™ to prevent snow and ice build-up.
- **Chainless Hydraulic Cylinder Lifting System** greatly reduces bounce during transport and provides full float capability.
- **Cast-Iron Plow Shoes** provide extended wear resistance compared to steel shoes.

- **Blade Shock Absorber** stabilizes and cushions the trip action.
- **Heavy-Duty Push Frame and Attachment Bar** for additional strength and reliability.
- **High-Performance Hydraulic Package** delivers reliability and speed.
- **Enclosed Hydraulics** protects against corrosion and hydraulic freeze-up.

LEARN MORE ABOUT BOSS PRODUCTS
BOSSPLOW.COM

7'6" Standard-Duty



D-Force maintains consistent hydraulic down force through the use of a hydraulic accumulator to improve scraping performance while backdragging. D-Force is an optional accessory on new truck plow purchases. Available for select Straight-Blade truck plow models including Super-Duty and HTX Straight-Blade plows. (Excludes EXT, Heavy-Duty and Trip-Edge plows.)



*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.





A BIGGER TAKE ON A CLASSIC

The bigger jobs call for the BOSS Super-Duty Straight-Blade. The durable steel blade features a baked-on powder-coat paint finish with zinc primer to resist corrosion, and the superslick polyethylene moldboard of the poly blade prevents snow from sticking. The Super-Duty has everything you love about BOSS Straight-Blades with extra strength, making it a monster when it's time to RESTORE ORDER. It's another powerful tool from BOSS that's built to BACK YOU UP.

16

17

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.

D-Force maintains consistent hydraulic down force through the use of a hydraulic accumulator to improve scraping performance while backdragging. D-Force is an optional accessory on new truck plow purchases. Available for select Straight-Blade truck plow models including Super-Duty and HTX Straight-Blade plows. (Excludes EXT, Heavy-Duty and Trip-Edge plows.)



- ▶ Steel 7'6", 8', 8'6", 9'
- ▶ Poly 7'6", 8'

STANDARD FEATURES:

▶ SEE IT IN ACTION
BOSSPLOW.COM



8' Steel Super-Duty

- ▶ **Full Moldboard Trip Design** helps to prevent plow damage when an obstacle is encountered.
- ▶ **SmartLight™ 3** uses 100% LED lights with an 8-10 year life expectancy and Ice Shield Technology™ to prevent snow and ice build-up.
- ▶ **Chainless Hydraulic Cylinder Lifting System** greatly reduces bounce during transport and provides full float capability.
- ▶ **Cast-Iron Plow Shoes** provide extended wear resistance compared to steel shoes.
- ▶ **Blade Shock Absorber** stabilizes and cushions the trip action.
- ▶ **Reinforced Moldboard** increases blade rigidity for increased durability.
- ▶ **Heavy-Duty Push Frame and Attachment Bar** for additional strength and reliability.
- ▶ **High-Performance Hydraulic Package** delivers reliability and speed.
- ▶ **Enclosed Hydraulics** protects against corrosion and hydraulic freeze-up.



ROLL WITH WINTER'S PUNCHES

BOSS Trip-Edge Snowplows are engineered to power through the heaviest snow and any obstacles that come with it. The extra-rigid moldboard and trip-edge technology ensure that only the cutting edge trips when you hit an obstacle, so you won't lose the load you're pushing. Trip-Edge Snowplows feature four adjustable trip return springs, so you can customize the trip spring tension for the job at hand. Available in steel and stainless steel for pickup truck applications, BOSS Trip-Edge Snowplows are built to BACK YOU UP.

STANDARD FEATURES:

- Steel 7'6", 8', 9'
- Stainless Steel 8', 9'

- **Trip-Edge Design** helps to prevent plow damage when an obstacle is encountered.
- **SmartLight™ 3** uses 100% LED lights with an 8-10 year life expectancy and Ice Shield Technology™ to prevent snow and ice build-up.
- **Chainless Hydraulic Cylinder Lifting System** greatly reduces bounce during transport and provides full float capability.
- **Adjustable Trip Springs** allow you to customize the trip spring tension.

- **Cast-Iron Plow Shoes** provide extended wear resistance compared to steel shoes.
- **Reinforced Moldboard** increases blade rigidity for increased durability.
- **Heavy-Duty Push Frame and Attachment Bar** for additional strength and reliability.
- **Enclosed Hydraulics** protects against corrosion and hydraulic freeze-up.

QUESTIONS? CHAT LIVE ONLINE.
BOSSPLOW.COM

Adjustable Trip Springs

Trip-Edge

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.



WHEN WINTER HITS HARD, HIT BACK HARDER

If you're looking for larger, heavy-duty plows, BOSS has what you want. Designed for medium-duty trucks, the BOSS Heavy-Duty Straight-Blades feature a reinforced moldboard with enhanced blade curl to power through deep, wet snow. The versatility of the dual-trip BOSS DXT allows you to scoop, stack and punch through hard-packed banks with power and performance. Both models come standard with the SL3 light system with Ice Shield Technology™ to handle every job, even in the worst conditions. Because when it's on you to RESTORE ORDER, BOSS is always there to BACK YOU UP.

➤ Steel Heavy-Duty 9', 10'
Steel DXT 10'

STANDARD FEATURES:

- **Patented Dual-Trip Technology** on the DXT combines trip-edge and full moldboard trip technology to maximize impact protection.
- **SmartLight™ 3** uses 100% LED lights with an 8-10 year life expectancy and Ice Shield Technology™ to prevent snow and ice build-up.
- **Chainless Hydraulic Cylinder Lifting System** greatly reduces bounce during transport and provides full float capability.
- **½" x 6" Long-Lasting, Durable Base Angle** to provide extended wear resistance and comes with built-in curb guards and patented snow catcher (DXT only).
- **Cast-Iron Plow Shoes** provide extended wear resistance compared to steel shoes (optional on 10' DXT).
- **Full Moldboard Trip Design** helps to prevent plow damage when an obstacle is encountered (Straight-Blade only).
- **Dual Shock Absorbers** stabilize and cushion the trip action (Straight-Blade only).
- **Heavy-Duty Push Frame and Attachment Bar (Heavy-Duty) and Center Section (DXT)** designed for additional strength and reliability.
- **Reinforced Moldboard** increases blade rigidity for increased durability.
- **High-Performance Hydraulic Package** delivers reliability and speed.
- **Enclosed Hydraulics** protects against corrosion and hydraulic freeze-up.

SEE HOW BOSS BACKS YOU UP.
BOSSPLOW.COM



10' Heavy-Duty
Straight-Blade Steel

10' DXT Steel



MAXIMUM EFFICIENCY, SPEED AND PRECISION

BOSS Hopper Spreaders are some of the most powerful tools in your snow and ice removal arsenal. Our fast-growing family of VBX Spreaders are fully featured for ease of use and maximum productivity for years of operation in harsh winter conditions. The VBX family features models with both pintle and auger feeds, powerful electric motors, standard worklights, easy to use controls and the flexibility to spread a variety of deicing materials. BOSS builds quality and durability into every spreader, helping you to RESTORE ORDER.

STANDARD FEATURES:

➤ VBX 6500, VBX 8000, VBX 9000

- **Pintle Chain or Auger Feed System** features either a heavy-duty pintle chain or mild steel helical auger for long life and reliability.
- **Poly Hopper** is built to outlast the elements.
- **Dual Variable Speed Controller** is equipped with auto-reverse (auger only) and over-load protection.
- **LCD Screen In-Cab Controller** is backlit for clear visibility and ease of use.
- **14.5" Diameter Urethane Spinner** is durable, corrosion-resistant and ensures consistent distribution.
- **Enclosed Spinner Motor** is weather and dust sealed to ensure performance, durability and reliability.
- **Tarp With Integral Tie-Downs** to protect spreading material from the elements.
- **Dual Variable Speed Vibrators** prevent material bridging for ease of operation (standard for auger; available as an accessory for pintle).

- **Inverted V-Baffle** reduces material build-up for optimal spreading efficiency (standard for auger; available as an accessory for pintle).
- **Chain Cleaning Brush** removes excess material from chain on every pass (pintle chain only).
- **Full-Length Slide-Out Tray** captures falling deicing material, keeping it away from truck bed, preventing corrosion (pintle chain only).

ADDITIONAL ACCESSORIES

- **Pre-Wet** allows contractors to pre-wet solid deicing materials, improving material efficiency. (Available accessory on new VBX Spreaders.)
- **Pro-Lid** weather-sealed, polyethylene hard cover protects deicing materials. (Available accessory for VBX Spreaders.)

PRO-LID

Weather-sealed, polyethylene hard cover protects deicing material inside the VBX Spreader. The BOSS Pro-Lid can be opened while remaining on the ground with most vehicles. (Available as an accessory on VBX Spreaders: VBX 6500, VBX 8000 and VBX 9000 only.)



VBX 6500
1.5 cubic yards of capacity

VBX 8000
2 cubic yards of capacity



VBX 9000
3 cubic yards of capacity

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.



FIGHT ICE WITH STEEL

Introducing the BOSS Forge, a stainless steel Hopper Spreader from BOSS. It performs just as powerfully and reliably as the VBX Spreader line while offering a fully stainless steel hopper. The Forge is constructed using a combination of bolting, riveting and welding for optimal durability and serviceability throughout the spreader's lifetime. The stainless steel BOSS Forge is available with either a pintle chain or auger feed system. Both the hopper and the drive train housing are constructed with one of the heaviest-gauge materials in the market, enhancing the Forge's sturdiness and durability in adverse winter conditions. It's another example of a tough, reliable innovation from BOSS that is built to BACK YOU UP.

Forge 2.0

STANDARD FEATURES:

- > **Pintle Chain or Auger Feed System** features either a heavy-duty pintle chain or mild steel helical auger for long life and reliability.
- > **Chain Cleaning Brush** removes excess material from chain on every pass (pintle chain only).
- > **Stainless Steel Hopper** is built to outlast the elements.
- > **14.5" Diameter Urethane Spinner** is durable, corrosion-resistant and ensures consistent distribution.
- > **Enclosed Spinner Motor** is weather and dust sealed to ensure performance, durability and reliability.
- > **Vibrator** prevents material bridging for ease of operation (auger only).
- > **Inverted V-Baffle** reduces material build-up for optimal spreading efficiency (auger only).
- > **Full-Length Slide-Out Tray** captures falling deicing material, keeping it away from truck bed, preventing corrosion (pintle chain only).
- > **Dual Variable Speed Controller** is equipped with auto-reverse and over-load protection and is backlit for clear visibility and ease of use.

ADDITIONAL ACCESSORIES

- > **Pre-Wet** allows contractors to pre-wet solid deicing materials, improving material efficiency.
- > **For additional accessories, including the Forge light kit, tarp, vibrator, inverted V (pintle) and more, ask your BOSS Dealer.**

24

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.

PRE-WET

Allows contractors to pre-wet solid deicing materials, improving the efficiency of solid deicing materials. Equipped with a 60-gallon tank capacity, this system is available as an option on all new VBX and Forge Spreaders.



FORGE 2.0
2 cubic yards of capacity



LEARN MORE ABOUT BOSS PRODUCTS
BOSSPLOW.COM



25

TGS TAILGATE SPREADERS

GET THE JOB DONE RIGHT, FAST

The TGS Spreader series from BOSS is the easiest way to arm yourself against all things snow and ice. BOSS tailgate-mounted spreaders attach easily and disperse deicing materials quickly and efficiently to make your job as smooth and steady as possible. All TGS Spreaders are built tough to handle harsh conditions, because BOSS knows the faster you can RESTORE ORDER to your community, the better.

STANDARD FEATURES:

> TGS 300, TGS 600, TGS 800, TGS 1100

- > **Adjustable Feed Gate** allows you to adjust the material discharge amount (optional on TGS 300).
- > **Poly Adjustable Material Deflector** allows you to adjust the material discharge width and direction pattern.
- > **12" Diameter Urethane Spinner** is durable, corrosion-resistant and ensures consistent distribution.
- > **Enclosed 12-Volt Electric High-Torque Motor** is weather and dust sealed to ensure performance, durability and reliability.
- > **Low-Profile Poly Hopper Design** provides better visibility.
- > **Variable Speed Control** equipped with blast feature and overload protection.
- > **Choose Your Attachment System** with a slide-in system or the RT3 system. (RT3 not available on TGS 300.)
- > **Solid Poly Hopper Cover** protects against weather and is made to last.
- > **Stabilizer Arms and Tie-Down Straps** minimize any side-to-side movement. (Stabilizer arms not available on TGS 300.)
- > **Top Screen With Bag Splitter** easily opens bags and filters deicing material. (Bag splitter not included on TGS 300.)
- > **Enclosed Feed Motor** powers the Feed Paddle Mechanism with 12 volts of high-torque electric power (TGS 800 only).
- > **Swing-Away Spinner Assembly** allows for quick removal of leftover material (TGS 800 only).
- > **Material Saver System** eliminates material flow when spreader is not in use. (Standard on TGS 300. Optional on the TGS 600 and TGS 1100, not available on TGS 800. Only needed for select materials.)
- > **For Optional Accessories, Ask Your BOSS Dealer.**

The selection of proper deicing materials can be complicated and varies by personal preference, experience and environmental concerns. All factors should be considered before making your selection.

SEE IT IN ACTION
BOSSPLOW.COM



The BOSS TGS series works with a variety of deicing materials to fit the job at hand. See the Spreader Materials Guide on Page 32 to learn more.



TGS 1100 has a capacity of 11 cubic feet, or 800 lb.

TGS 800 has a capacity of 8 cubic feet, or 780 lb.

TGS 600 has a capacity of 6 cubic feet, or 400 lb.

TGS 300 has a capacity of 3 cubic feet, or 200 lb.

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.

Optional RT3 Attachment System allows you to easily attach and detach your spreader (not available on TGS 300).



BOSS SNOWPLOW AUTHORIZED ACCESSORIES

CONTROL OPTIONS



JOYSTICK CONTROL

If you prefer the feel of a joystick, opt for this versatile accessory, featuring a lighted on/off switch and right or left hand adjustment.



STRAIGHT-BLADES STB03191
V-PLOWS.....MSC03809

SNOWPLOW SIGHT SYSTEM


Optional for all BOSS snowplows featuring the SmartLight™ 2 lighting system, our exclusive Snowplow Sight System allows you to align your truck and plow from inside your cab for hookups on the first try, every time. This system makes the fastest plow attachment system even faster and easier. Not compatible with SL3 with Ice Shield Technology.™



SNOWPLOW SIGHT SYSTEMMSC09644



Mount it on your dash (with or without handle).



Attach it to a pedestal mount.

28

MOUNTING OPTIONS

Attach the versatile SmartTouch® 2 Handheld Control to a pedestal mount or mount it on your dash (with or without handle).

PEDESTAL MOUNTMSC09658
DASHBOARD MOUNTMSC09660

D-FORCE CONTROLLER

The new D-Force controller is the same tried and trusted design of the BOSS SmartTouch® 2 controller, ensuring ease of operation during the longest winter events. The red center of the controller signifies D-Force capability, allowing for increased down force to be applied during backdragging for optimal scraping performance. Available only with D-Force capable Straight-Blade truck plow models including Super-Duty and HTX Straight-Blade plows. (Excludes EXT, Heavy-Duty and Trip-Edge plows.)



D-FORCE CONTROLLER.....STB10160

ATTACHMENT SYSTEMS



Attach your plow in just three easy steps with the industry's easiest to use snowplow attachment system.

SMARTHITCH® 2.....MSC04679

BLADE ENHANCEMENT

PLOW WINGS

Increasing your blade width by a full 22" at a 30-degree angle, these convenient poly plow wings will cut your plowing time and attach and detach within seconds (excludes HTX and Heavy-Duty plows).

STRAIGHT-BLADE MSC08042C
XT AND DXT PLOWS MSC08063B
 (Excludes HTX plows & Heavy-Duty plows. The only DXT models recommended for plow wing extensions are the 8'2" Steel DXT and 8'2" Poly DXT. Wing extensions do fit other DXT sizes and do not void the warranty but are not recommended, as the blade may sag when in the scoop position, due to the weight of the wing extensions.)



HIGH-PERFORMANCE V-PLOW CUTTING EDGE

Featuring built-in curb guards and patented snow catcher, our patented V-plow cutting edge is made of Hardox® that delivers extended wear resistance compared to conventional cutting edges.

7'6" DRIVER SIDE BAL08857
7'6" PASSENGER SIDE BAR08856
8'2" DRIVER SIDE BAL08859
8'2" PASSENGER SIDE BAR08858
8'2" DXT DRIVER SIDE BAL18150
8'2" DXT PASSENGER SIDE BAR18145
9'2" DRIVER SIDE BAL08861
9'2" PASSENGER SIDE BAR08860
9'2" DXT DRIVER SIDE BAL18165
9'2" DXT PASSENGER SIDE BAR18155
10' DXT DRIVER SIDE BAL17580
10' DXT PASSENGER SIDE BAR17590



CURB GUARDS

Protect the edges of your plow with these long-lasting, high-impact curb guards. Fits all BOSS Straight-Blade snowplow models (except HTX and Sport-Duty).

STRAIGHT-BLADE DRIVER SIDE.....STB03395
STRAIGHT-BLADE PASSENGER SIDE.....STB03394
STRAIGHT-BLADE HEAVY-DUTY DRIVER SIDE.....STB04364
STRAIGHT-BLADE HEAVY-DUTY PASSENGER SIDE.....STB04363

29



RUBBER SNOW DEFLECTOR

For increased visibility and safety, keep snow from blowing onto your windshield with a rugged snow deflector specifically designed for BOSS snowplows.

7' AND 7'6" HTX AND 7'6" STANDARD-DUTY STRAIGHT-BLADE PLOWSMSC04587B
7'6"-9'2" V-PLOWS AND 7'6"-9'0" SUPER-DUTY STRAIGHT-BLADE PLOWS MSC01565
10' DXT, EXT AND HEAVY-DUTY STRAIGHT-BLADE PLOWSMSC17611B
HEAVY-DUTY 9'0" MSC01565

D-FORCE

D-Force maintains consistent hydraulic down force through the use of a hydraulic accumulator to improve scraping performance while backdragging. D-Force is an optional accessory on new truck plow purchases. Available for select Straight-Blade truck plow models including Super-Duty and HTX Straight-Blade plows. (Excludes EXT, Heavy-Duty and Trip-Edge plows.)



SUPER-DUTY D-FORCE PLOW BOX STB15025
HTX D-FORCE PLOW BOX STB15035
 (D-Force needs to be purchased at the same time as a new plow. You are not able to add D-Force to your plow after purchase.)

BACKDRAG EDGE

Improved scraping performance when backdragging. Available accessory on all Straight-Blade plows (excludes: 10' Heavy-Duty and EXT).

7'0" BACKDRAG EDGE.....STB06534
7'6" BACKDRAG EDGE.....STB06535
8'0" BACKDRAG EDGE.....STB06536
8'6" BACKDRAG EDGE.....STB06537
9'0" BACKDRAG EDGE.....STB06538

BLADE ENHANCEMENT

URETHANE CUTTING EDGE

BOSS now offers a full line of Urethane Cutting Edges to cover our entire line of Straight-Blade plows. Ranging from 7' all the way up to 10', the edges offer between 1" to 2" of material thickness based on blade application and are reversible with a built-in bevel for optimum scraping performance. All necessary mounting hardware is included in the kit.

7' X 6" X 1" HTX/SPORT-DUTY STRAIGHT-BLADE (7')	STB09231
7'6" X 6" X 1" HTX/SPORT-DUTY STRAIGHT-BLADE (7'6")	STB09232
7'6" X 8" X 1½" STD AND SUPER-DUTY STRAIGHT-BLADE (7'6")	STB09233
8' X 8" X 1½" SUPER-DUTY STRAIGHT-BLADE (8')	STB09234
8'6" X 8" X 1½" SUPER-DUTY STRAIGHT-BLADE (8'6")	STB09235
9' X 8" X 1½" SUPER-DUTY STRAIGHT-BLADE (9')	STB09236
10' X 8" X 2" HEAVY-DUTY STRAIGHT-BLADE (10')	STB09237



STABILITY & PERFORMANCE



REPLACEMENT BUMPER TRIM KIT

This kit eliminates the need to cut or modify a portion of the OEM bumper to access the push beam's hooks. The kits utilize the factory mounting holes and give the plow vehicle an attractive, finished OEM look when installed. If the truck is going to be sold, the original bumper piece can be reinstalled to look like new.

BUMPER TRIM KIT, 2014-2015 CHEVY 1500	MSC09409
BUMPER TRIM KIT, 2015 + CHEVY 2500/3500	MSC09279
BUMPER TRIM KIT, 2014-2015 GMC 1500	MSC09290
BUMPER TRIM KIT, 2015 + GMC 2500/3500	MSC09295
BUMPER TRIM KIT, 2016 + GMC 1500	MSC18870
BUMPER TRIM KIT, 2016 + CHEVY 1500	MSC18880

LIGHTING OPTIONS



30

SL3 WITH ICE SHIELD TECHNOLOGY™

SL3 UPGRADE KIT	MSC16200
SMARTLIGHT™ 1 TO SL3 UPGRADE KIT	MSC18860
SMARTLIGHT™ 2 TO SL3 UPGRADE KIT	MSC19050

SHOVELS

SNOWPLOW SNOW PUSHER SHOVEL

BOSS has joined forces with the leader in high-performance, contractor-grade snow shovels! This tough, durable, high-performance shovel is built for the abuse of the season with premium blade material for unmatched scraping ability. Available in 28", 36" and 48" blade sizes. See your local BOSS Dealer for purchase.



SMARTLOCK® CYLINDERS

Keep your V-plow locked securely in the straight position while backdragging, with these easy to install locking cylinders.



PRE-2006 V-PLOWS	HYD07130
2006 & NEWER V-PLOWS	HYD09733
2006 & NEWER 10' V-PLOWS AND 10' DXT PLOWS	HYD09386



V-Blade Caster Wheel Kit**

CASTER WHEELS

Ideal for moving your plow around in the garage or service bay, these wheels utilize existing shoe holders on the blade and make moving the plow a breeze. These heavy-duty wheels feature steel ball bearings for smooth movement and long-lasting life. Separate kits are available for straight-blades and V-plows. **Excludes:** Trip-Edge Straight-Blade, 10' DXT and Heavy-Duty Straight-Blade plows.

CASTER KIT, STRAIGHT-BLADE	MSC09215
CASTER KIT, V-PLOW (INCLUDES XT)	MSC09216
CASTER KIT, HTX (COVERS 7', 7'6")	MSC09249
CASTER KIT, DXT	MSC01141
CASTER KIT, HTX-V	MSC09235

**Wheel color may vary.



Trip-Edge Shoe Kit



31

CAST-IRON PLOW SHOES

These ultra-rugged cast-iron shoes deliver extended wear resistance compared to conventional steel shoes.

PLOW SHOE ASSEMBLY*	MSC01570
HTX PLOW SHOE BRACKET OPTION KIT (SHOES INCLUDED)	MSC09588
TRIP-EDGE PLOW SHOE ASSEMBLY	TRP07880
DXT SHOE KIT (BRACKET NOT INCLUDED)	MSC18207
DXT PLOW SHOE BRACKET OPTION KIT (SHOES INCLUDED)	MSC18184

*DXT and HTX blades now include Plow Shoe Brackets as standard. Shoes sold separately.

MAINTENANCE



TOUCH-UP PAINT

Cover chips and scrapes the professional way with BOSS touch-up paint.

RED, SPRAY PAINT	MSC04098
BLACK, SPRAY PAINT	MSC04036
RED, QUART	MSC04358

HIGH-PERFORMANCE HYDRAULIC FLUID

This specially formulated hydraulic fluid maintains its viscosity from normal use to temperatures as low as -40°F.

GALLON	HYD01836
QUART	HYD01835



EMERGENCY PARTS KITS

These kits feature the most useful replacement parts, packaged in a convenient soft-sided case that fits easily behind the seat of your truck (excludes 10' DXT, EXT and Heavy-Duty Straight-Blades).

V-PLOW EMERGENCY PARTS KIT	MSC04298
STRAIGHT-BLADE EMERGENCY PARTS KIT	STB16187

PLOW TERMINAL CLEANER KIT

The BOSS Terminal Cleaner Kit cleans and restores male and female electrical plow connectors. It includes 0.188" male/female terminal cleaner, 0.25" male/female terminal cleaner and leather-type holster.

PLOW TERMINAL CLEANER KIT	MSC05220
---------------------------	----------




BALLAST RETAINER KIT

Use the ballast retainer kit to hold sandbags securely in place in order to provide enhanced performance.

BALLAST RETAINER KIT	MSC09845
----------------------	----------

MATERIALS GUIDE

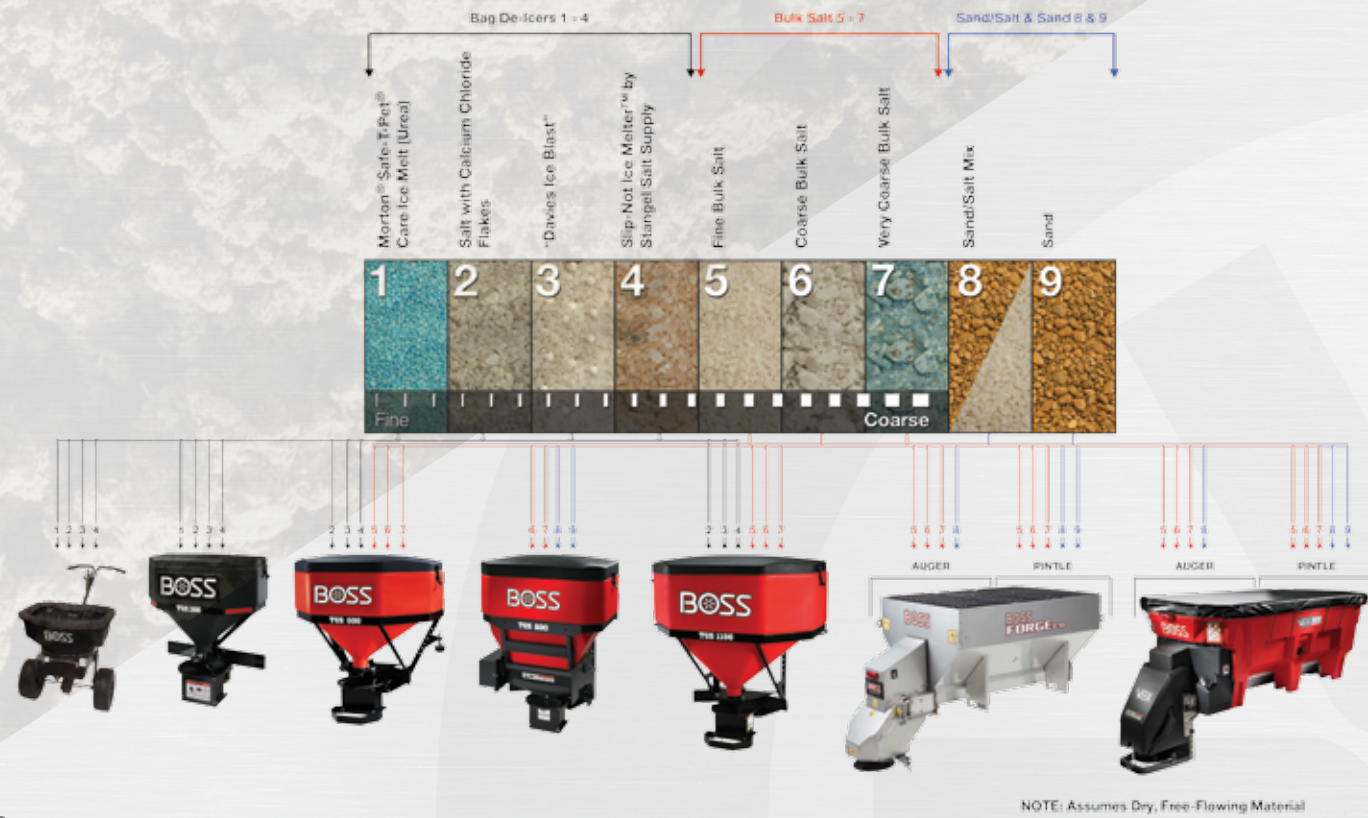

32

BOSS SNOWPLOW AUTHORIZED ACCESSORIES



PRE-WET SYSTEM

Equipped with a 60-gallon tank and mounting bracket.

PRE-WET SYSTEM.....MSC20100

LIGHT KIT

LIGHT KIT, FORGE 2.0.....MSC19525

TARP

TARP, FORGE 2.0.....VBS17190

INVERTED V

(Optional on pintle, standard on auger systems.)

INVERTED V, FORGE 2.0VBS17180
 INVERTED V, VBX 6500.....VBS15140
 INVERTED V, VBX 8000 AND VBX 9000VBS15320

PRO-LID

Weather seal protects deicing material inside the BOSS Spreader. The easy open, ergonomic design allows operators to remain on the ground while opening cover doors.



VBX 6500 PRO-LID W/ HARDWARE.....VBS15125
 VBX 8000 PRO-LID W/ HARDWARE.....VBS15130
 VBX 9000 PRO-LID W/ HARDWARE.....VBS15135

VBX VIBRATOR KIT

For improved material flow and handling, consider the addition of the VBX Vibrator Kit. (Optional on pintle, standard on auger systems.)

SINGLE VBX, FORGE 2.0 VIBRATOR KIT.....VBS14465
 DOUBLE VBX VIBRATOR KIT.....VBS14466

TGS VIBRATOR KIT

For improved material flow and handling, consider the addition of the TGS Vibrator Kit.

TGS VIBRATOR KIT.....TGS05960

MATERIAL SAVER SYSTEM

MATERIAL SAVER SYSTEM.....TGS11328

WHAT YOU GET WHEN YOU BUY A BOSS PLOW*



1



+ BLADE

Steel, stainless, poly – whichever you choose, it's durable and reliable.

2



+ SMARTLIGHT™ 3

SL3 100% LED lights with Ice Shield Technology™ to prevent snow and ice build-up.

3



+ PUSH FRAME/COUPLER

The powerful reinforced steel framework behind your plow.

4



+ UNDERCARRIAGE

Serves as the connection point from the plow to the truck.

5



+ HYDRAULICS & CONTROLLER

An intuitive, easy-to-use system completely protected from the elements.

6



+ ATTACHMENT SYSTEM

A three-step, fully hydraulic system for quick and easy attachment.

7



+ CUTTING EDGE OR BASE ANGLE

A durable cutting edge designed for precision and performance. On DXT models, the base angle serves as a cutting edge until worn.

8



+ WORLD-CLASS SUPPORT

From our dealer network and factory customer support to our Owners Group, BOSS is there to BACK YOU UP.

*The above equipment applies to brand-new truck plow purchases that require all components.

33

PERSONAL-USE PLOWS

HTX V AND STRAIGHT-BLADES

VEHICLE APPLICATION: LIGHT-DUTY, 4WD, ½-TON TRUCKS AND SUVs



SPECIFICATIONS	7'6" HTX V-Plow Steel	7' Steel / Poly / Stainless HTX	7'6" Steel / Poly / Stainless HTX
Blade Width (Straight)	90" (229 cm)	84" (213 cm)	90" (229 cm)
Plowing Width @ 30° Angle	78" (198 cm)	73" (185 cm)	78" (198 cm)
Blade Height	32" (81 cm) at end, 25" (63 cm) at center	26" (66 cm)	26" (66 cm)
Plowing Width (V position)	81" (206 cm)	N/A	N/A
Plowing Width (Scoop)	74" (188 cm)	N/A	N/A
Blade Thickness	14-ga Steel	14-ga (0.19 cm) Mild Steel / ¼" (0.6 cm) Poly / 14-ga (0.19 cm) Stainless Steel	14-ga (0.19 cm) Mild Steel / ¼" (0.6 cm) Poly / 14-ga (0.19 cm) Stainless Steel
Cutting Edge	¾" x 6" (0.95 cm x 15 cm)	¾" x 6" (0.95 cm x 15 cm)	¾" x 6" (0.95 cm x 15 cm)
Reinforcement Ribs	6 vertical, 2 diagonal	4 vertical, 2 diagonal	6 vertical, 2 diagonal
Plow Shoes	Optional	Optional	Optional
Trip Springs	2	2	2
SmartLock Cylinders	1½" x 8¼" (3 cm x 21 cm)	N/A	N/A
Angle Cylinders	N/A	1½" x 6½" (4 cm x 17 cm)	1½" x 6½" (4 cm x 17 cm)
Lift Cylinder	1¾" x 1½" x 10" (5 cm x 3 cm x 25 cm)	1¾" x 1½" x 10" (5 cm x 3 cm x 25 cm)	1¾" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Attachment System	SmartHitch 2	SmartHitch 2	SmartHitch 2
Plow Weight*	490 lb ^a (222 kg)	393 lb ^a (178 kg) / 367 lb ^a (166 kg) / 393 lb ^a (178 kg)	440 lb ^a (200 kg) / 416 lb ^a (188 kg) / 440 lb ^a (200 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology

*Plow weight does not include vehicle mount weight. ^aVehicle mount weight range: 45-75 lb (20-34 kg).

PROFESSIONAL-USE PLOWS



EXT

VEHICLE APPLICATION: 4WD, ¾ AND 1-TON TRUCKS

SPECIFICATIONS	EXT
Blade Width (Retracted)	96" (244 cm)
Blade Width (Extended)	120" (305 cm)
Plowing Width @ 30° Angle	83" (211 cm)-IN, 103" (262 cm)-OUT
Blade Height	30" (76.2 cm)
Blade Thickness	11-ga Steel
Cutting Edge	½" (1.27 cm) AR450
Reinforcement Ribs	9 vertical
Plow Shoes	Optional
Trip Springs	4
Angle Cylinders	1½" x 10" (4 cm x 25 cm)
Wing Cylinders	1½" x 1½" x 12¾" (4 cm x 3 cm x 32 cm)
Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Shock Absorber	1
Attachment System	SmartHitch 2
Plow Weight*	970 lb ^b
Plow Lights	SL3 L.E.D. with Ice Shield Technology

*Plow weight does not include vehicle mount weight. ^bVehicle mount weight range: 75-105 lb (34-48 kg).

STANDARD-DUTY STRAIGHT-BLADE

VEHICLE APPLICATION: 4WD, ½ AND ¾-TON TRUCKS AND SUVs

SPECIFICATIONS	7'6" Standard-Duty Steel
Blade Width (Straight)	90" (229 cm)
Plowing Width @ 30° Angle	78" (198 cm)
Blade Height	27½" (70 cm)
Blade Thickness	14-ga high-strength Steel
Cutting Edge	¾" x 6" (1 cm x 15 cm)
Reinforcement Ribs	7 vertical
Plow Shoes	Cast iron
Trip Springs	3
Angle Cylinders	1½" x 10" (4 cm x 25 cm)
Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Shock Absorber	1
Attachment System	SmartHitch 2
Plow Weight*	597 lb ^b (271 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology

*Plow weight does not include vehicle mount weight. ^bVehicle mount weight range: 75-105 lb (34-48 kg).

PROFESSIONAL-USE PLOWS

DXT

VEHICLE APPLICATION: 4WD, ¾ AND 1-TON TRUCKS AND SUVs, MEDIUM-DUTY TRUCKS 14,000-27,000 GVWR (10' ONLY)



SPECIFICATIONS	8'2" Steel / Poly / Stainless DXT	9'2" Steel / Poly / Stainless DXT	10' Steel Heavy-Duty DXT
Blade Width (Straight)	98" (249 cm)	110" (279 cm)	120" (305 cm)
Blade Width (V)	88" (224 cm)	99" (251 cm)	107" (272 cm)
Blade Width (Scoop)	81" (206 cm)	92" (234 cm)	102" (259 cm)
Plowing Width @ 30° Angle	85" (216 cm)	95" (241 cm)	104" (264 cm)
Blade Height	30" (76 cm) at center, 37½" (95 cm) at ends	30" (76 cm) at center, 37½" (95 cm) at ends	35" (88 cm) at center, 45" (114 cm) at ends
Blade Thickness	11-ga Steel / ¾" Poly / 12-ga 304 Stainless Steel	11-ga Steel / ¾" Poly / 12-ga 304 Stainless Steel	11-ga Steel
Base Angle	½" x 6" (1.3 cm x 15 cm)**	½" x 6" (1.3 cm x 15 cm)**	½" x 6" (1.3 cm x 15 cm)
Reinforcement Ribs	6 vertical, 2 diagonal	8 vertical, 2 diagonal	8 vertical, 2 diagonal
Plow Shoes	Optional	Optional	Optional
Trip Springs (Moldboard)	4 Extension Springs	4 Extension Springs	4 Extension Springs
Trip Springs (Base Angle)	6 total	6 total	6 total
SmartLock Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	2" x 10" (5.08 cm x 25.4 cm)
Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2¼" x 1½" x 12" (5.72 cm x 2.86 cm x 30.48 cm)
Attachment System	SmartHitch 2	SmartHitch 2	SmartHitch 2
Plow Weight*	868 lb ^b (394 kg) / 878 lb ^b (398 kg) / 920 lb ^b (417 kg)	925 lb ^b (420 kg) / 935 lb ^b (424 kg) / 977 lb ^b (433 kg)	1,205 lb ^b (547 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology

*Plow weight does not include vehicle mount weight. ^bVehicle mount weight range: 130-160 lb (59-73 kg).

**The tripping base angles on the DXT come standard with curb guards and patented snow catcher, and they can be used as the cutting edge until worn. The optional cutting edge is made from Hardox[®] for maximum wear resistance and durability.

SUPER-DUTY STRAIGHT-BLADE

VEHICLE APPLICATION: 4WD, ½ TO 1-TON TRUCKS AND SUVs

SPECIFICATIONS	7'6" Super-Duty Steel / Poly	8' Super-Duty Steel / Poly	8'6" Super-Duty Steel	9' Super-Duty Steel**
Blade Width (Straight)	90" (229 cm)	96" (244 cm)	102" (259 cm)	108" (274 cm)
Plowing Width @ 30° Angle	78" (198 cm)	83" (211 cm)	88" (224 cm)	93½" (238 cm)
Blade Height	29" (74 cm)	29" (74 cm)	29" (74 cm)	29" (74 cm)
Blade Thickness	11-ga Steel / ¾" (1 cm) Poly	11-ga Steel / ¾" (1 cm) Poly	11-ga Steel	11-ga Steel
Cutting Edge	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)
Reinforcement Ribs	7 vertical, 2 diagonal	7 vertical, 2 diagonal	7 vertical, 2 diagonal	7 vertical, 2 diagonal
Plow Shoes	Cast iron	Cast iron	Cast iron	Cast iron
Trip Springs	4	4	4	4
Angle Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)
Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Shock Absorber	1	1	1	1
Attachment System	SmartHitch 2	SmartHitch 2	SmartHitch 2	SmartHitch 2
Plow Weight*	680 lb ^b (308 kg) / 706 lb ^b (320 kg)	698 lb ^b (317 kg) / 722 lb ^b (328 kg)	720 lb ^b (327 kg)	742 lb ^b (337 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology

*Plow weight does not include vehicle mount weight. ^bVehicle mount weight range: 75-105 lb (34-48 kg). **Includes 1-ton trucks with dual rear wheels.



PROFESSIONAL-USE PLOWS

XT

VEHICLE APPLICATION: 4WD, ¾ AND 1-TON TRUCKS AND SUVs



SPECIFICATIONS	7'6" XT Steel	8'2" XT Steel / Poly	9'2" XT Steel / Poly**
Blade Width (Straight)	90" (229 cm)	98" (249 cm)	110" (279 cm)
Plowing Width (V position)	81" (206 cm)	88" (224 cm)	99" (252 cm)
Plowing Width (Scoop)	74" (188 cm)	81" (206 cm)	92" (234 cm)
Plowing Width @ 30° Angle	77" (196 cm)	85" (216 cm)	95" (241 cm)
Blade Height	36" (91 cm) at end, 30" (76 cm) at center	37" (94 cm) at end, 30" (76 cm) at center	38" (96.52 cm) at end, 30" (76 cm) at center
Blade Thickness	14-ga Steel	11-ga Steel / ¾" (1 cm) Poly	11-ga Steel / ¾" (1 cm) Poly
Cutting Edge (AR450)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)
Reinforcement Ribs	6 vertical, 2 diagonal	6 vertical, 2 diagonal	8 vertical, 2 diagonal
Plow Shoes	Optional	Optional	Optional
Trip Springs	4	4	4
SmartLock Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)
Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Attachment System	SmartHitch 2	SmartHitch 2	SmartHitch 2
Plow Weight*	713 lb ^a (323 kg)	785 lb ^a (356 kg) / 795 lb ^a (361 kg)	842 lb ^a (382 kg) / 852 lb ^a (387 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology

*Plow weight does not include vehicle mount weight. ^aVehicle mount weight range: 75-105 lb (34-48 kg). **Includes 1-ton trucks with dual rear wheels.



TRIP-EDGE SUPER-DUTY STRAIGHT-BLADE

VEHICLE APPLICATION: ½ TO 1-TON TRUCKS AND SUVs

SPECIFICATIONS	7'6" Trip-Edge Steel	8' Trip-Edge Steel / Stainless	9' Trip-Edge Steel** / Stainless
Blade Width (Straight)	90" (229 cm)	96" (244 cm)	108" (274 cm)
Plowing Width @ 30° Angle	78" (198 cm)	83" (211 cm)	93½" (238 cm)
Blade Height	31" (79 cm)	31" (79 cm)	31" (79 cm)
Blade Thickness	11-ga Steel	11-ga Steel / 14-ga 304 Stainless	11-ga Steel / 14-ga 304 Stainless
Base Angle	½" x 3½" (1.3 cm x 9 cm)	½" x 3½" (1.3 cm x 9 cm)	½" x 3½" (1.3 cm x 9 cm)
Cutting Edge	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)
Reinforcement Ribs	6 vertical, 2 diagonal	6 vertical, 2 diagonal	8 vertical, 2 diagonal
Plow Shoes	Cast iron	Cast iron	Cast iron
Trip Springs	4	4	4
Trip Pivot Pin Diameter	1" (3 cm)	1" (3 cm)	1" (3 cm)
Trip Spring Type	¾" (1 cm) hooked extension spring	¾" (1 cm) hooked extension spring	¾" (1 cm) hooked extension spring
Trip-Edge Adjustable	Standard	Standard	Standard
Angle Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)
Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Attachment System	SmartHitch 2	SmartHitch 2	SmartHitch 2
Plow Weight*	796 lb ^a (361 kg)	825 lb ^a (372 kg) / 875 lb ^a (397 kg)	877 lb ^a (399 kg) / 934 lb ^a (424 kg)
Plow Lights	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology	SL3 L.E.D. with Ice Shield Technology


*Plow weight does not include vehicle mount weight. ^aVehicle mount weight range: 75-105 lb (34-48 kg). **Includes 1-ton trucks with dual rear wheels.

HEAVY-DUTY PLOWS

HEAVY-DUTY STRAIGHT-BLADE

10" DXT (SPECIFICATIONS LISTED ON PAGE 35)

VEHICLE APPLICATION: MEDIUM-DUTY TRUCKS 14,000-27,000 GVWR

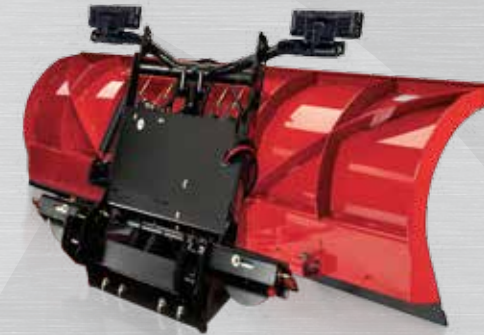

ICE CONTROL EQUIPMENT

TGS TAILGATE SPREADERS

VEHICLE APPLICATION: SUVs AND ½ TO 1-TON TRUCKS



SPECIFICATIONS	TGS 300*	TGS 600*	TGS 800**	TGS 1100*
Hopper Design	Low-profile	Low-profile	Low-profile	Low-profile
Hopper Construction	Polyethylene	Polyethylene	Polyethylene	Polyethylene
Hopper Capacity	3 cu ft / 200 lb (0.08 cu m / 91 kg)	6 cu ft / 400 lb (0.17 cu m / 181 kg)	8 cu ft / 780 lb (0.23 cu m / 354 kg)	11 cu ft / 800 lb (0.31 cu m / 363 kg)
Hopper Dimensions	21¼"H x 29"W x 15"D (53 cm x 74 cm x 38 cm)	25¾"H x 38"W x 21"D (65 cm x 97 cm x 53 cm)	48"H x 36"W x 21"D (122 cm x 91 cm x 53 cm)	34"H x 44"W x 24"D (86 cm x 112 cm x 61 cm)
Spreader Weight	70 lb (31 kg) plus mount	101 lb (45 kg) plus mount	220 lb (100 kg) plus mount	152 lb (69 kg) plus mount
Hopper Cover	Solid poly	Solid poly	Solid poly	Solid poly
Feed Mechanism	Internal auger w/material saving brush and adjustable drop-feed gate	Internal auger with cable-link agitator and adjustable feed gate	Feed paddle	Internal auger with cable-link agitator and adjustable feed gate
Vibrator Kit	Not recommended	Optional	Optional	Optional
Top Screen with Bag Opener	Top Screen Only	Standard	Standard	Standard
Motor	High-torque / 12-volt DC	High-torque / 12-volt DC	High-torque / 12-volt DC	High-torque / 12-volt DC
Spinner	12" (31 cm) Poly	12" (31 cm) Poly	12" (31 cm) Poly	12" (31 cm) Poly
Spread Width	4 - 30 feet (1 - 9 meters)	4 - 30 feet (1 - 9 meters)	4 - 20 feet (1 - 6 meters)	4 - 30 feet (1 - 9 meters)
Material Deflector	Adjustable poly deflector	Adjustable poly deflector	Adjustable poly deflector	Adjustable poly deflector
Receiver Class Hitch	Class 2-4	Class 3 or 4	Class 4	Class 4
Control	Variable speed control with blast feature and overload protection	Variable speed control with blast feature and overload protection	Independent controls for material feed and spinner speed	Variable speed control with blast feature and overload protection
Vehicle Applications	SUV, light truck and up	¾ and 1-ton trucks	¾ and 1-ton trucks	¾ and 1-ton trucks

*Designed to spread dry, free-flowing material (i.e., salt, deicers, etc.). **Designed to spread sand, salt or a combination of both. See Spreader Materials Guide on Page 32 for more details on material spreading options.

ICE CONTROL EQUIPMENT

FORGE AND VBX HOPPER SPREADERS

VEHICLE APPLICATION: ¾, 1-TON, DUMP BODY AND FLATBED TRUCKS



SPECIFICATIONS	FORGE 2.0 AUGER / PINTLE CHAIN	VBX 6500 AUGER / PINTLE CHAIN	VBX 8000 AUGER / PINTLE CHAIN	VBX 9000 AUGER / PINTLE CHAIN
Hopper Capacity	2 cu yd (1.53 cu m)	1.5 cu yd (1.15 cu m)	2 cu yd (1.53 cu m)	3 cu yd (2.29 cu m)
Hopper Length	70" (177.8 cm)	78" (198.1 cm)	96" (244 cm)	107" (272 cm)
Hopper Overall Length	98" (249 cm)	93½" (237.5 cm)	115" (292 cm)	126" (330 cm)
Hopper Height	38" (96.5 cm)	38¾" (97 cm)	38" (97 cm)	49" (124.5 cm)
Hopper Width	48" (122 cm)	48¼" (122.6 cm)	48¼" (123 cm)	48" (122 cm)
Complete Unit Weight (Empty)	650 lb (295 kg) / 700 lb (318 kg)	550 lb (250 kg) / 600 lb (272 kg)	600 lb (272 kg) / 650 lb (295 kg)	700 lb (322 kg) / 760 lb (345 kg)
Hopper Construction	14 ga Stainless Steel	¾" (0.5 cm) Double Wall Polyethylene Hopper	¾" (0.5 cm) Double Wall Polyethylene Hopper	¾" (0.5 cm) Double Wall Polyethylene Hopper
Spread Width	2 ft - 40 ft (0.6 m - 12.2 m) Dry, free-flowing material	2 ft - 40 ft (0.6 m - 12 m) Dry, free-flowing material	2 ft - 40 ft (0.6 m - 12 m) Dry, free-flowing material	2 ft - 40 ft (0.6 m - 12 m) Dry, free-flowing material
Max Feed Rate	2.3 cu ft (0.06 cu m) per minute / 4 cu ft (0.11 cu m) per minute	2.3 cu ft (0.06 cu m) per minute / 4 cu ft (0.11 cu m) per minute	2.3 cu ft (0.06 cu m) per minute / 4 cu ft (0.11 cu m) per minute	2.3 cu ft (0.06 cu m) per minute / 4 cu ft (0.11 cu m) per minute
Lighting	Optional	Dual 55 watt halogen variable output worklights	Dual 55 watt halogen variable output worklights	Dual 55 watt halogen variable output worklights
Cover	Optional	VCP Tarp w/integral tie-downs	VCP Tarp w/integral tie-downs	VCP Tarp w/integral tie-downs
Top Screen	Standard	Standard	Standard	Standard
Gearbox	Planetary Gearbox	Planetary Gearbox	Planetary Gearbox	Planetary Gearbox
Motor	½ HP Motor	¾ HP SS Feed Motor	¾ HP SS Feed Motor	¾ HP SS Feed Motor
Trough	Austinetic Stainless Steel	Austinetic Stainless Steel	Austinetic Stainless Steel	Austinetic Stainless Steel
Cab Controller	Dual Variable Speed Controller	LCD Display Controller	LCD Display Controller	LCD Display Controller
Dual Variable Speed Control	Standard	Standard	Standard	Standard
Variable Speed Vibrator	N/A	2 Standard (Auger) / Optional (Pintle)	2 Standard (Auger) / Optional (Pintle)	2 Standard (Auger) / Optional (Pintle)
Vibrator	1 Standard (Auger) / Optional (Pintle)	N/A	N/A	N/A
Inverted V Baffle	Standard / Optional	Standard / Optional	Standard / Optional	Standard / Optional
Feed System	6" OD X 9" (15 cm x 23 cm) pitch full length auger / 14" (36 cm) wide Pintle Chain	6" OD x 9" (15 cm x 23 cm) pitch full length auger / 14" (36 cm) wide Pintle Chain	6" OD x 9" (15 cm x 23 cm) pitch full length auger / 14" (36 cm) wide Pintle Chain	6" OD x 9" (15 cm x 23 cm) pitch full length auger / 14" (36 cm) wide Pintle Chain
LED CHMSL	Standard	Standard	Standard	Standard
Adjustable Deflector	Standard	Standard	Standard	Standard
Spinner Assembly	Easily removable, Swing Out	Easily removable and height adjustable	Easily removable and height adjustable	Easily removable and height adjustable
Hopper Tie-Down Kit	Standard	Standard	Standard	Standard
Spinner	14½" (36.8 cm) Diameter Urethane Spinner	14½" (36.8 cm) Diameter Urethane Spinner	14½" (36.8 cm) Diameter Urethane Spinner	14½" (36.8 cm) Diameter Urethane Spinner
Spinner Gearmotor	½ HP Gearmotor (Located above spinner)	½ HP Spinner Gearmotor (Located above spinner)	½ HP Spinner Gearmotor (Located above spinner)	½ HP Spinner Gearmotor (Located above spinner)
Minimum Bed Length	6'6" (198.1 cm)	5'6" (167.6 cm)	6'6" (198.1 cm)	8' (243.8 cm)
GVWR	10,000 lb (4,535 kg)	9,000 lb Gross Vehicle Weight Required	10,000 lb Gross Vehicle Weight Required	13,000 lb Gross Vehicle Weight Required

See Spreader Materials Guide on Page 32 for more details on material spreading options.

*All images shown may include standard/optional equipment. Please consult your local BOSS Dealer for more information.

TWO-YEAR LIMITED WARRANTY

All BOSS Snowplows and equipment are guaranteed to be free from defects in material and workmanship for two full years from the date of purchase. Stop by any authorized BOSS Dealer to receive complete details on our two-year parts and labor warranty. Please visit bossplow.com for more details.

LEGAL STATEMENT

Vehicles intended to be equipped with a spreader and/or snowplow must comply with the vehicle manufacturers' specifications for equipment application. BOSS Products reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used herein. BOSS Products may be protected by one or more patents; please see bossplow.com for more details.

BOSS EXTENDED FAMILY

GIVING YOU EVERYTHING YOU NEED TO RESTORE ORDER



QUESTIONS? CHAT LIVE ONLINE.
BOSSPLOW.COM



Ask your BOSS Dealer or visit bossplow.com to browse the full family of BOSS products, including Truck Equipment, ATV/UTV Equipment, Heavy Equipment, Ice Control Equipment, Accessories and more.

DON'T FORGET TO ASK ABOUT AVAILABLE FINANCING OPTIONS.

Ask your BOSS Dealer or visit bossplow.com for more details.