



**BUSH HOG®**  
Performance You Can Count On™

## Rear Mounted Blades



### We can help you out of a tough scrape!

If you need a tool for landscaping, snow removal, feed lot work, ditching, terracing, dam building, road reconditioning, or general farm maintenance, a Bush Hog® Rear Mounted Blade is always the answer. Bush Hog® offers models ranging from light duty to heavy duty in a variety of widths, all engineered and built to provide years of service under demanding conditions at a very reasonable price. So if you find yourself facing a tough scrape, turn to Bush Hog® for performance you can count on!

# BUSH HOG® REAR MOUNTED BLADES

Whether you're a homeowner, farmer, landscaper, or contractor, Bush Hog® has a blade for every job and every level of duty.

## COMPACT REAR BLADE (CRB)

Bush Hog's compact rear blades are the ideal choice for light duty landscaping, driveway maintenance, or snow removal. These light duty blades are rated for use on two-wheel drive tractors up to 24 PTO horsepower and four-wheel drive tractors up to 15 PTO horsepower. The moldboard may be reversed for backfilling and angled left or right for use in a wide variety of applications. Tilting of the blade is achieved by adjustment of the tractor's 3-point hitch arms.



Available in 4, 5, and 6-foot operating widths.

## 35 SERIES BLADE

Whether you are a budget-minded landscape contractor considering a blade for your jobsite, or a homeowner interested in landscaping or snow removal, the 35 Series has what you're looking for. These utility blades are rated for use on two-wheel drive tractors up to 35 PTO horsepower and four-wheel drive tractors up to 30 PTO horsepower and feature tilt, angle, and offset adjustments in both forward and reverse positions.



Available in 4, 5, 6, and 7-foot operating widths.

## 50 SERIES BLADE

Ideal for jobsites, landscaping, and homeowners, the 50 Series is the preferred choice for those who need a 50 PTO horsepower rated blade with the features and capabilities of a much heavier unit. Rated for a maximum of 50 HP 2WD or 40 HP 4WD, the 50 Series blades feature tilt, angle, and offset adjustments in both forward and reverse positions.



Available in 6 and 7-foot operating widths.

## 70 SERIES BLADE

The medium-duty 70 Series Blades are designed for landscaping, road maintenance, and snow removal. These blades feature a heavy duty mainframe and high-strength, reinforced moldboards to ensure years of trouble-free performance. The 70 Series Blades are rated for use on two-wheel drive tractors up to 70 PTO horsepower and four-wheel drive tractors up to 55 PTO horsepower. These blades feature tilt, angle and offset adjustments in both forward and reverse positions.



Available in 6, 7, and 8-foot operating widths.

## 91 SERIES BLADE

**Available in 7 and 8-foot operating widths.**




The rugged construction of the 91 Series Rear Blades make them ideal for a wide variety of applications, ranging from general road maintenance to ditching and terracing jobs.

These blades are recommended for use on two-wheel drive tractors up to 90 PTO horsepower and four-wheel drive tractors up to 70 PTO horsepower.

The 91 Series blades feature a number of tilt, angle, and offset adjustments in both the forward and reverse positions for the versatility to handle a variety of tough jobs.

## 100 & 160 SERIES BLADES

**100 Series**  
**Available in 8 and 9-foot operating widths.**

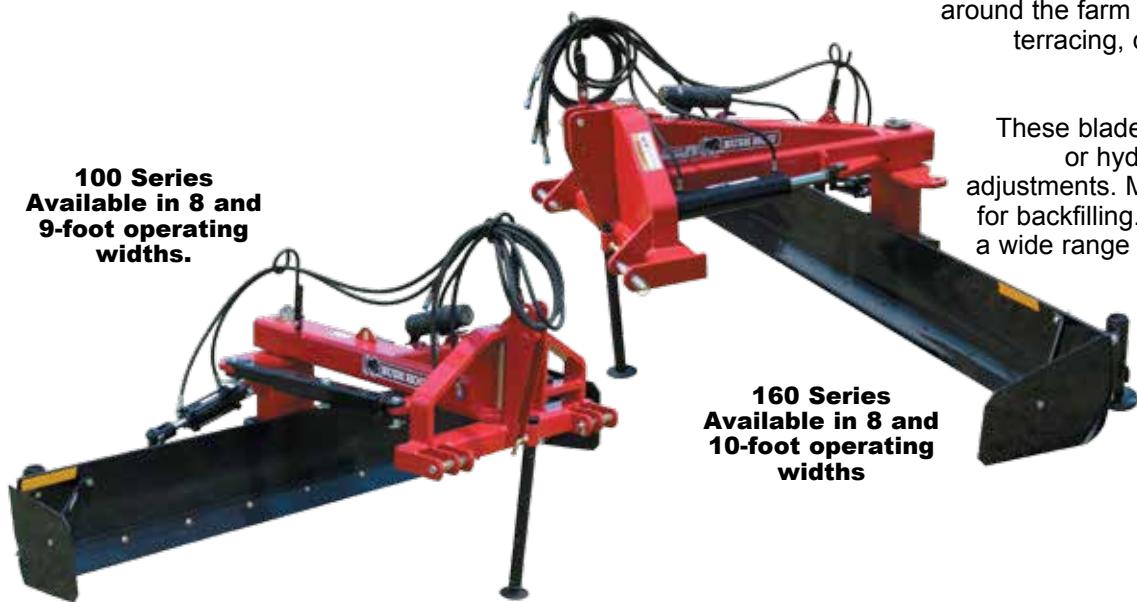

**160 Series**  
**Available in 8 and 10-foot operating widths**

The 100 and 160 Series Rear Blades are the ideal choice for heavy-duty grading chores around the farm such as road construction, terracing, dam building, and cleaning out feed lots.


These blades offer a choice of manual or hydraulic tilt, angle, and offset adjustments. Moldboard can be reversed for backfilling. They are rated for use on a wide range of 2WD and 4WD tractors, depending on blade width.

With their heavy-duty construction, the 100 & 160 Series Blades are engineered and built to meet the most demanding conditions.

## 225 & 300 SERIES BLADES

**225 Series**  
**Available in 8, 10 and 12-foot operating widths.**

**300 Series (not shown).**  
**Available in 12 and 14-foot operating widths.**

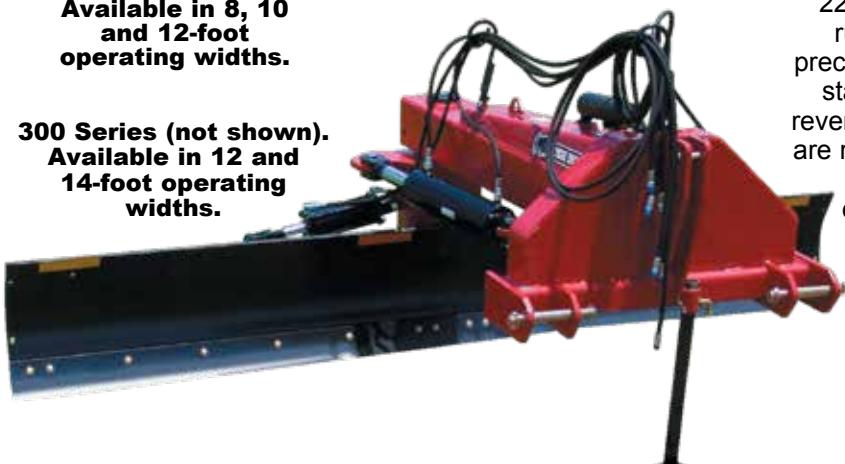

The heavy-duty design and construction of the 225 and 300 Series make them ideal for the most rugged road maintenance and grading jobs. The precision-formed moldboards are reinforced to withstand the most demanding conditions and can be reversed for backfilling. These top-of-the-line blades are rated for use on higher horsepower tractors and feature standard all-hydraulic controls for ease of operation. The 225 and 300 Series are ready for heavy-duty action and give you the ability and confidence to tackle the toughest jobs.

## REAR BLADE SPECIFICATIONS

SERIES	CRB	35	50	70	91	100	160	225	300
<b>Moldboard Width</b>	4, 5, and 6 ft.	4, 5, 6, and 7 ft.	6 and 7 ft.	6, 7, and 8 ft.	7 and 8 ft.	8 and 9 ft.	8 and 10 ft.	8, 10 & 12 ft.	12 & 14 ft.
<b>Moldboard Height and Thickness</b>	12 x 1/4 in.	14.5 x 1/4 in.	15-7/8 x 1/4 in.	18 x 5/16 in.	16 x 3/8 in.	17 x 3/8 in.	18 x 1/2 in.	20 x 1/2 in.	20 x 1/2 in.
<b>Moldboard Cutting Edge</b>	3/8 x 3 in.	1/2 x 3 in.	Reversible	1/2 x 6 in.	Reversible	1/2 x 6 in.	1/2 x 6 in.	1/2 x 6 in.	1/2 x 6 in.
<b>Hitch</b>	3-Pt. Cat I Cat I Quick Hitch	3-Pt. Cat I Cat I Quick Hitch	3-Pt. Cat I Cat I Quick Hitch	3-Pt. Cat I & II	3-Pt. Cat I & II	3-Pt. Cat I & II Cat II Quick Hitch	3-Pt. Cat. II & III Quick Hitch	3-Pt. Cat. II & III Quick Hitch	3-Pt. Cat. III & IV Quick Hitch
<b>Approximate Weight</b>	136 lbs. (4 ft.) 150 lbs. (5 ft.) 164 lbs. (6 ft.)	250 lbs. (4 ft.) 280 lbs. (5 ft.) 290 lbs. (6 ft.) 325 lbs. (7 ft.)	403 lbs. (6 ft.) 430 lbs. (7 ft.)	510 lbs. (6 ft.) 538 lbs. (7 ft.) 572 lbs. (8 ft.)	703 lbs. (7 ft.) 740 lbs. (8 ft.)	942 lbs. (8 ft.) 975 lbs. (9 ft.)	1409 lbs. (8 ft.) 1529 lbs. (10 ft.)	2120 lbs. (8 ft.) 2260 lbs. (10 ft.) 2400 lbs. (12 ft.)	3463 lbs. (12 ft.) 3603 lbs. (14 ft.)
<b>Max. Tractor HP (PTO)</b>							8' 125 9' 95	8' 190 10' 160	8' 250, 10' 225 12' 175
<b>2-Wheel Drive</b>	24	35		50		70			
<b>Front Wheel Assist</b>	15	30		40		55	70	8' 105 9' 80	8' 160 10' 135
<b>King Pin Diameter</b>	1-1/4 in. Grade 8	1-1/4 in. Grade 8	1-1/4 in. Grade 8	1-1/4 in. Grade 8	3 in.	3 in.	4 in.	4 1/2 in.	5 in.
<b>Tilt Adjustment</b>	3-Pt. Hitch	15° up or down	15° up or down	30° up or down (manual)	15° up or down (manual or hyd.)	15° up or down (manual or hyd.)	15° up or down (manual or hyd.)	15° up or down (hydraulic)	15° up or down (hydraulic)
<b>Offset Adjustment</b>	None	12 in. left or right (manual)	23 in. left or right (manual)	18 in. left or right (manual or hyd.)	30 in. left or right (manual or hyd.)	30 in. left or right (manual or hyd.)	37 in. left or right (manual or hyd.)	46 in. left or right (hydraulic)	50 in. left or right (hydraulic)
<b>Angle Adjustment</b>	5 forward positions up to 30°, 3 reverse positions up to 15°	5 forward positions up to 30°, 3 reverse positions up to 15°	5 forward positions up to 30°, 3 reverse positions up to 15°	5 forward positions up to 45°, 5 reverse positions up to 30°	45° left or right in forward position, 20° left or right in rev. position (manual or hyd.)	45° left or right in forward and reverse position, manual or hyd.)	45° left or right in forward and reverse position, manual or hyd.)	45° left or right in forward and reverse position, manual or hyd.)	45° left or right (in forward and reverse position, hydraulic)
<b>Skid Shoes</b>	N/A	N/A	N/A	N/A	Optional	Optional	Optional	Optional	Optional
<b>End Plates</b>	N/A	N/A	N/A	N/A	Optional	Optional	Optional	Optional	Optional
<b>Parking Stand</b>	N/A	N/A	Standard	Standard	Standard	Standard	Standard	Standard	Standard
<b>Hydraulics</b>	N/A	N/A	N/A	N/A	Optional	Optional	Optional	Optional	Optional

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. NOTE: 225 and 300 Series blades not warrantied for use on track-type tractors.

Dealer Info:



**BUSH HOG®**  
Performance You Can Count On™

[www.bushhog.com](http://www.bushhog.com)

Bush Hog®, Inc.  
2501 Griffin Ave., Selma, AL 36703  
(334) 874-2700

©January 2011 Bush Hog®, Inc.