



BUSH HOG®
Performance You Can Count On™

RT-Series



Rotary Tillers

Tougher than dirt.

Whether you want a home garden or have the heavy-duty requirements of a professional nurseryman or landscape contractor, Bush Hog® tillers will give you outstanding results and are built to provide superior performance year after year. Whatever the tractor size or the task, Bush Hog® has a model for you.

YOUR BEST CHOICE FOR HIGH-YIELD SEEDBEDS.
50 TO 88-INCH TILLING WIDTHS • FOR 18 TO 90 HP TRACTORS

BUSH HOG® RT SERIES ROTARY TILLERS

CHOICE OF 4 SERIES TILLERS, GEAR, OR CHAIN DRIVEN.

Bush Hog's RT Series Rotary Tillers are the ideal tools for both landscape contractors or homeowners. With tilling widths available from 50 to 88-inch, there is sure to be a model to meet your needs. These tillers allow you to control the soil mix. With the rear shield in the open position, coarser soil and debris can be worked. Closing the rear shield produces finer mulching, maximum trash chopping and soil blending.

Depending upon the model, these tillers have offset capabilities ranging from 6 to 18-1/4-inches, allowing you to work closer to obstructions and cover the tractor tread. The RTS, RTN and RTNR models are chain driven while the RTH tillers are direct

gear-driven for heavy-duty, primary tillage jobs. The RTNR model features reverse rotation tines for optimum seedbed preparation in fewer passes over the field.

Whether you need a home garden or have the heavy-duty requirements of a professional nurseryman or landscape contractor, these rugged tools will give you outstanding tillage performance year after year.

RTH SERIES ROTARY TILLERS

72, 80, and 88-inch tilling widths
for 60-80 PTO HP tractors



RTNR SERIES ROTARY TILLERS

72 and 80-inch tilling widths
for 50-90 PTO HP tractors

RTH ROTARY TILLER FEATURES:

- Rugged construction
- Heavy-duty gearboxes
- Direct gear drive
- Replaceable skids
- Shielded drivelines




RTNR ROTARY TILLER FEATURES:

- Reverse till
- Heavy-duty gearbox
- High-carbon, long-life steel blades and solid rotors
- Adjustable skid shoes
- Slip clutch standard
- Replaceable skids
- Rear shield levels the prepared seedbed


RTN SERIES ROTARY TILLERS

72 and 80-inch tilling widths
for 40-70 PTO HP tractors

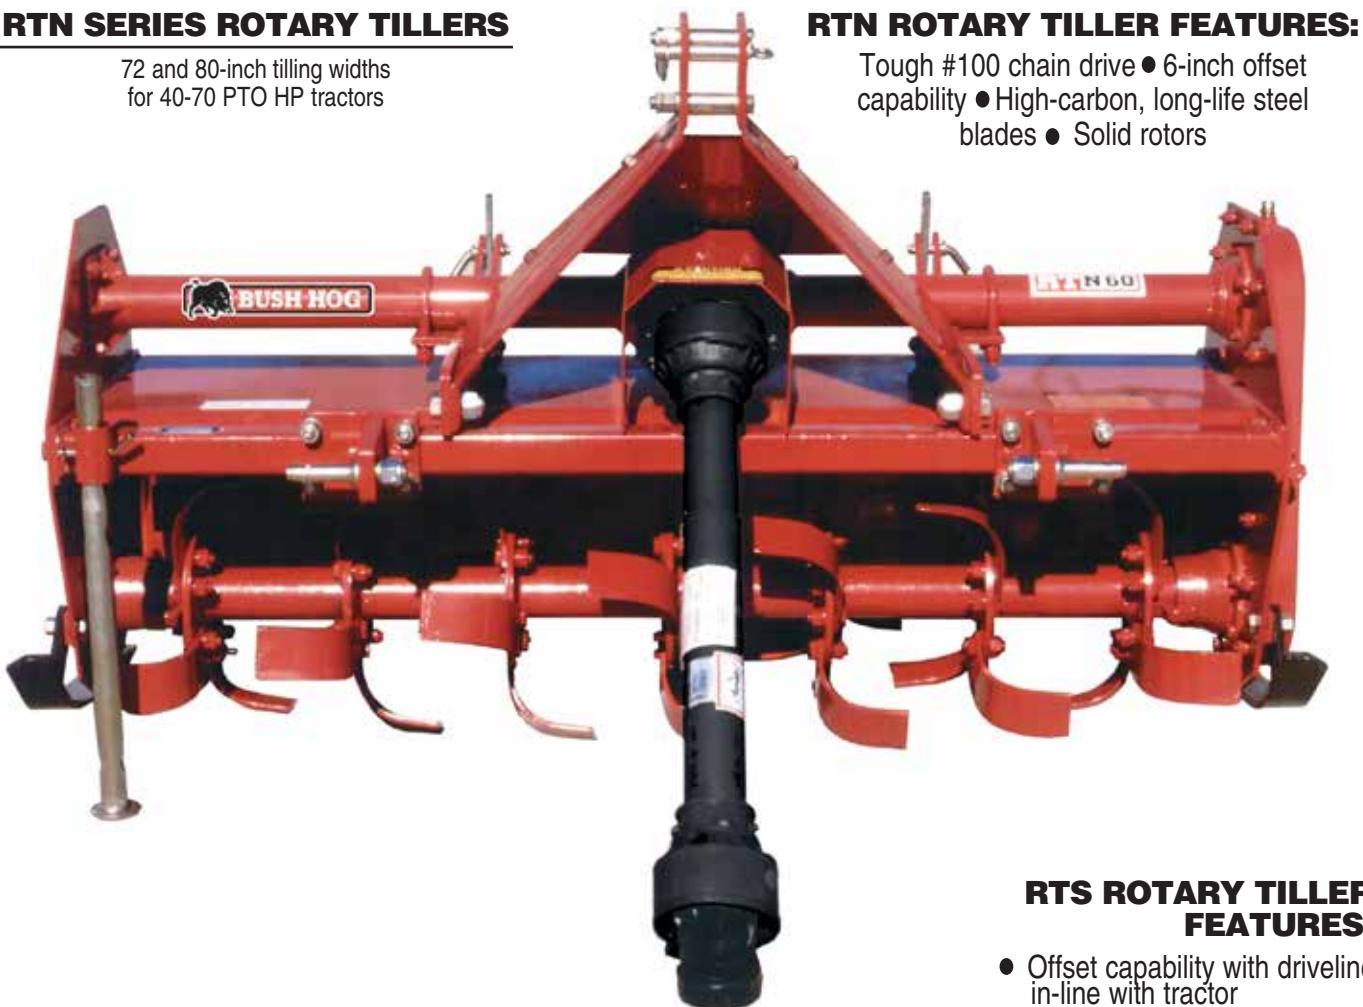


RTN ROTARY TILLER FEATURES:

- Tough #100 chain drive
- 6-inch offset capability
- High-carbon, long-life steel blades
- Solid rotors

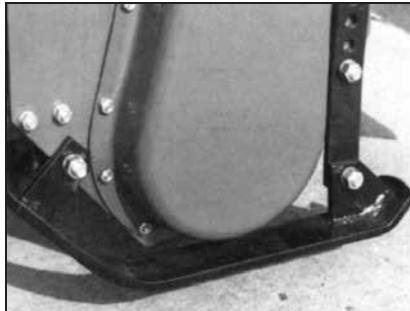

Adjustable skid shoes are standard equipment for precise depth control. RTH, RTN, and RTNR tillers adjust through 5 positions to a 7-inch tilling depth and RTS tillers adjust through 4 positions to a 7-inch depth.

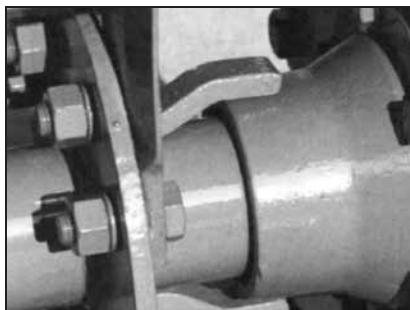

A unique anti-wrap device on the RTH and RTN tillers prevents residue from damaging seals. On the RTS tillers, triple-lip sealed ball bearings on the rotor shaft help keep dirt out and reduce wrapping.

RTS ROTARY TILLER FEATURES:

- Offset capability with driveline in-line with tractor
- Solid rotors
- Wide, high-carbon, long-life steel blades
- Tough #80 chain drive
- Heavy-duty skid shoes
- 10-gauge deck construction
- Heavy-duty A-frame construction



RTS SERIES ROTARY TILLERS

50, 62 and 74-inch tilling widths for
18-50 PTO HP tractors



SPECIFICATIONS

SERIES	RTS	RTN	RTNR	RTH
Tilling Width	50, 62, and 74"	72 and 80"	72 and 80"	72, 80, and 88"
Tractor PTO HP Requirements	18-50 HP	40 - 70 HP	50 - 90 HP	60 - 80 HP
Hitch	Category I, 3-Point	Category I & II, 3-Point	Category I & II, 3-Point	Category I & II, 3-Point
Blades	L-Type	C-Type	C-Type	C-Type
Number of Blades	32, 40, 48	36, 40	36, 40	36, 40, 44
Rotor Speed	246 RPM/540 PTO	238 RPM/540 PTO	238 RPM/540 PTO	213 RPM/540 PTO
Power to Rotor Transmission	#80 Chain Dr., Single Speed	#100 Chain Dr., Single Speed	#100 Chain Dr., Single Speed	Gear Drive Single Speed
# of Flanges on Rotor	8, 10, 12	9, 10	9, 10	9, 10, 11
Offset Capability	12"-12"-18-1/4"	6"	6"	12" Fixed Offset on 60" Model
*Depth of Cut	Adjustable to 7" maximum with skid shoe			
Driveline Protection	Shear Bolt or Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch
Weight Range	418 to 532-lbs.	699 to 777-lbs.	797 to 860-lbs.	884 to 964-lbs.

* May require additional passes depending upon soil type

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Dealer Info:



BUSH HOG®
Performance You Can Count On™

www.bushhog.com

Bush Hog®, Inc.
2501 Griffin Ave., Selma, AL 36703
(334) 874-2700

©January 2015 Bush Hog®, Inc.