



HUSTLER
ENGINEERING PERFORMANCE


* PRELIMINARY *

SUPER S



See your local Hustler dealer for complete warranty details

- ▶ Compact Stance - great for tight spaces and trailering
- ▶ Toughest frame and deck in category
- ▶ Best-in-class operator comfort and positioning
- ▶ Operator friendly ergonomic controls
- ▶ 1.5" - 5.5" cut height
 - more range, more flexibility
- ▶ Up to 9 mph ground speed
- ▶ Signature Hustler® SmoothTrak™ steering for complete control

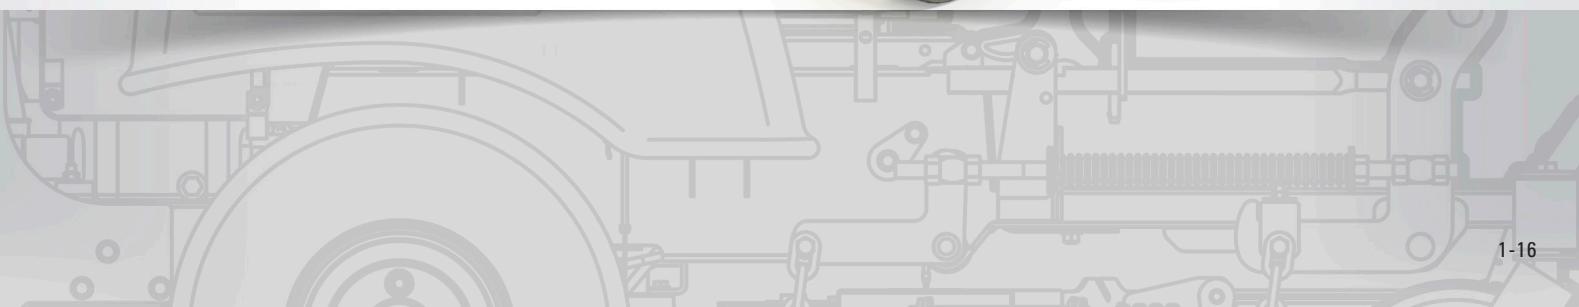

SUPER S

* PRELIMINARY *

ENGINE			
MANUFACTURER	Kawasaki, Kohler	SPINDLE MOUNTS	36" : 7ga. w/ 11ga. doubler 48, 52, 60" : 10ga. w/ 7ga. doubler
HP	36" deck : 15HP* - Kawasaki FS541V 48/52" deck : 22HP* - Kawasaki FX691V 60" deck : 23.5HP* - Kawasaki FX730V 52" deck : 23HP* - Kohler ECV730 EFI 60" deck : 25HP* - Kohler ECV740 EFI * Per SAE J 1995	IMPACT/TRIM AREAS	11ga. formed channel w/ rolled bottom
DISPLACEMENT	603-747cc	CONSTRUCTION	
COOLING	Air Cooled	FRAME	36" : 1.5" x 2" x .179 " steel 48, 52, 60" : 1.5" x 3" x .188 " steel
AIR CLEANER	Heavy Duty Air Canister (not standard on 36" deck)	ENGINE PLATE	7ga. w/ 11ga. jackshaft doubler
ENGINE WARRANTY	3 year	FRONT CASTER WHEELS	Heavy duty ball bearing, greasable
DRIVE SYSTEM		FRONT CASTER FORKS	Fabricated 3/8" steel
TYPE	Dual Hydrostatic	OPERATOR PLATFORM	7ga. w/ embossed tread pattern
TRANSMISSION	36" : Hydro-Gear 10cc Pump/Parker TL0195 Wheel Motor 48, 52, 60" : Hydro-Gear 12cc Pump/Parker TL0240 Wheel Motor	GENERAL	
SPEED	36" : 8 mph 48, 52, 60" : 9 mph	FUEL CAPACITY	36" : 6.5 gal. 48, 52, 60" : 7.3 gal.
PARKING BRAKES	Hand operated	FRONT TIRE	36" : 11 x 4 semi pneumatic 48", 52", 60" : 13 x 5 semi pneumatic
DECKS		DRIVE TIRE	36" : 18 x 8.5 - 10 48", 52" : 20 x 10 - 10 60" : 20 x 12 - 10
CUTTING WIDTH	36", 48", 52", 60"	DIMENSIONS	
CUTTING HEIGHTS	1.5"-5.5"	WEIGHT	36" : 990 lbs 48" : 1015 lbs 52" : 1040 lbs 60" : 1130 lbs
DECK LIFT	Hand Operated	HEIGHT	47.8"
DEPTH	5.5"	LENGTH	36" : 63.5" 48", 52" : 64" 60" : 66.5"
BLADES	36" : 2 48", 52", 60" : 3	WIDTH	36" : 48" 48" : 60.7" 52" : 64.8" 60" : 72.7"
BLADE LENGTH	36" deck : 17.86" x 2.50" x .20" 48" deck : 16.50" x 2.50" x .20" 52" deck : 17.86" x 2.50" x .20" 60" deck : 20.50" x 2.50" x .20"	TIRE WIDTH	36" : 36.3" 48", 52" : 44.7" 60" : 49.1"
SPINDLES	Ductile Cast Iron w/ steel shafts and sealed ball bearings	PRODUCTIVITY*	
DRIVE	Electric PTO Clutch	ACRES PER HOUR	36" : 2.33 48" : 3.49 52" : 3.93 60" : 4.36
CONSTRUCTION	36" : 7ga. Fabricated 48, 52, 60" : 10ga. Fabricated		

Optional Accessories: Mulch Kit, Grass Catcher (4.4bu.), Light Kit, Cup Holder, Trash Basket, Stripe Kit

* Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.

Specifications subject to change without notice.



www.hustlerturf.com