

EasyCut 3200 - Pull-Type Disc Mower



 **KRONE**



EasyCut


Pull-Type Disc Mower




MODEL SPECIFICATIONS	
Model	EASYCUT 3200
Working Width	10'4"
Hitch Type	Drawbar or 2-Point
Mount Type	Side-Pull
Transport Width	9'9"
Weight	2,557 lbs
Cutterbar Drive	Gear Drive
Topping Skids	Standard
HP Required	65
PTO Drive	540 rpm
Number of Cutting Discs	7
Blades Per Disc	2
Quick Change Blades	Standard
Tire Size	10.0/75-15.3
Required Hydraulic Outlets	1 S/A 1 D/A

EasyCut Cutterbar

- Strong, one-piece cutterbar housing with one oil reserve.
- Wedge-shaped with a low profile for clean cutting and smooth crop flow.



- Power is transmitted down the bar with large diameter drive gears, which are slow running for less noise, heat and wear.

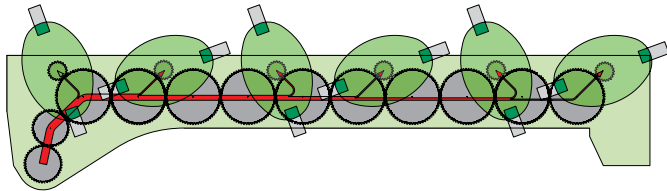

SafeCut Hubs



- Ultimate cutterbar protection.
- The system centers on a roll pin that connects each mower disc to the drive shaft and that shears off if the disc hits an obstacle.
- All elements in the cutterbar driveline are protected.
- While the sprocket continues revolving, the stopped disc jacks-up on a thread and out of the operating area of the blades on the neighboring discs, eliminating the risk of damaging these as well.

Flotation

- Two-point linkage system suspends the cutterbar so that it is pulled instead of pushed which evenly distributes all loads on the machine for a clean cut, optimum ground following in uneven conditions, and easy pulling for better fuel efficiency.
- Cutterbar is suspended in its center of gravity from a strong, double frame for ultimate stability and ground adaptability.