


**R135**

**SKID LOADERS**



**GEHL**<sup>®</sup>

<b>Capacities</b>		<b>Metric</b>		<b>Imperial</b>	
Rated Operating Capacity		612 kg		1349.22 lbs	
Rated Operating Capacity with Optional Counterweight		680 kg		1499.14 lbs	
Unladen weight		2327 kg		5130.15 lbs	
<b>Weight and dimensions</b>					
Overall Operating Height - Fully Raised	h27	3653 mm		11 ft 11.81 in	
Height to Hinge Pin - Fully Raised	h28	2790 mm		9 ft 1.84 in	
Overall Height to Top of ROPS	h17	1930 mm		6 ft 3.98 in	
Dump angle at full height	a5	40 °		40 °	
Dump height	h29	2120 mm		6 ft 11.46 in	
Overall length with bucket	l16	3048 mm		10 ft	
Dump reach at full height		591 mm		1 ft 11.26 in	
Rollback at ground		28 °		28 °	
Seat to ground height	h30	846 mm		2 ft 9.30 in	
Wheelbase	y	950 mm		3 ft 1.40 in	
Overall width less bucket	b1	1364 mm		4 ft 5.70 in	
Bucket Width	e1	1372 mm		4 ft 6.01 in	
Ground clearance	m4	201 mm		7.91 in	
Overall length - Less Bucket	l2	2322 mm		7 ft 7.41 in	
Clearance Radius - Front with Bucket		1842 mm		6 ft 0.51 in	
Clearance Circle - Front without Bucket	b19	1120 mm		3 ft 8.09 in	
Clearance Circle - Rear	wa1	1372 mm		4 ft 6.01 in	
<b>Performances</b>					
Travel speed (unladen)		12.90 km/h		8.01 mph	
<b>Wheels</b>					
Standard tyres		10.00x16.5 HD		10.00x16.5 HD	
<b>Engine</b>					
Engine brand		Yanmar		Yanmar	
Engine model		4TNV88C		4TNV88C	
Engine norm		Stage V / Tier 4		Stage V / Tier 4	
Gross Power (kW)		34.30 kW		34.30 kW	
Net Power (kW)		33.20 kW		33.20 kW	
Max. torque / Engine rotation		146.20 Nm / 2800 rpm		146.20 Nm / 2800 rpm	
Battery		12 V		12 V	
Starter (kW)		2.30 kW		2.30 kW	
<b>Hydraulics</b>					
Standard flow - Auxiliary hydraulics		70 l/min		70 l/min	
<b>Tank capacities</b>					
Fuel tank		59.40 l		15.69 US gal	
Displacement		2.19 l		0.57 US gal	
<b>Noise and vibration</b>					
Environmental noise (LwA)		101 dB(A)		101 dB(A)	
Whole-Body Vibration (ISO 2631-1)		.81 m/s <sup>2</sup>		.81 m/s <sup>2</sup>	
Vibration to whole hand/arm		< 1.77 m/s <sup>2</sup>		< 1.77 m/s <sup>2</sup>	

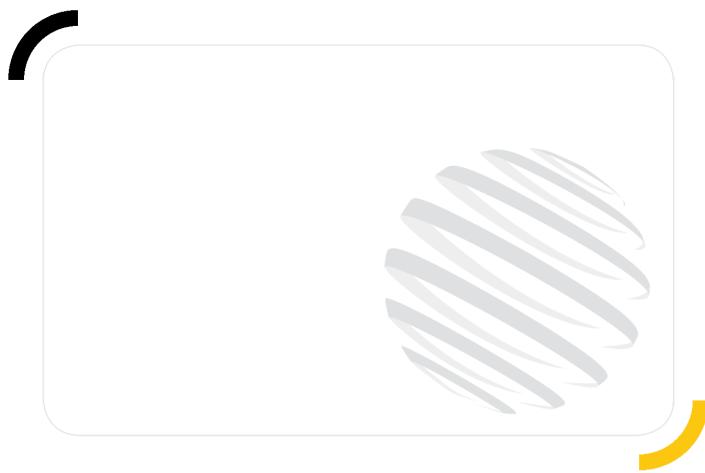

# GEHL®

Siège Social  
P.O. Box 179 - One Gehl Way - West Bend, WI, USA 53095  
Tel: (262) 334-9461 - Fax: (262) 338-7517  
[www.gehl.com](http://www.gehl.com)



This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contradictorial document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend