


V330

SKID LOADERS



GEHL[®]

Technical characteristics		Metric		Imperial
Wheelbase	y	1257 mm		4 ft 1.48 in
Capacities		1497 kg		3300.32 lbs
Rated Operating Capacity		92.70 l		24.48 US gal
Fuel tank		3.30 l		0.87 US gal
Displacement				
Weight and dimensions				
Rear departure angle		25 °		25 °
Overall Operating Height - Fully Raised	h27	4369 mm		14 ft 4 in
Overall Height to Top of ROPS	h17	2083 mm		6 ft 10 in
Overall length with bucket	l16	3874 mm		12 ft 8.51 in
Dump height	h29	2502 mm		8 ft 2.50 in
Dump reach at full height		813 mm		2 ft 8 in
Seat to ground height	h30	1041 mm		3 ft 4.98 in
Overall width less bucket	b1	1819 mm		5 ft 11.61 in
Overall length - Less Bucket	l2	3023 mm		9 ft 11.01 in
Clearance Circle - Rear	wa1	1765 mm		5 ft 9.48 in
Clearance Radius - Front with Bucket		2400 mm		7 ft 10.48 in
Height to Hinge Pin - Fully Raised	h28	3332 mm		10 ft 11.18 in
Bucket Width	e1	1880 mm		6 ft 2.01 in
Clearance Circle - Front with Bucket	b18	2400 mm		7 ft 10.48 in
Clearance Circle - Front without Bucket	b19	1422 mm		4 ft 7.98 in
Dump angle at full height	a5	42 °		42 °
Unladen weight		4123 kg		9089.65 lbs
Ground clearance	m4	229 mm		9.01 in
Standard tyres		14.00x17.5 HD		14.00x17.5 HD
Performances				
Travel Speed with Two-Speed Option - Maximum		20.10 km/h		12.48 mph
Travel speed (unladen)		13.50 km/h		8.38 mph
Engine				
Engine model		4TNV98C-NMSLV Stage V		4TNV98C-NMSLV Stage V
Max. torque / Engine rotation		294.20 Nm at 2500 rpm		294.20 Nm at 2500 rpm
Starter (kW)		3 kW		3 kW
Gross Power (kW)		53.70 kW		53.70 kW
Engine brand / norm		Yanmar / Stage V		Yanmar / Stage V
Net Power (kW)		52.70 kW		52.70 kW
Battery		12 V		12 V
Hydraulics				
Reservoir Capacity Hydraulics		40 l		10.56 US gal
High-Flow Auxiliary Hydraulics – Option		132 l/min		132 l/min
Standard flow - Auxiliary hydraulics		89 l/min		89 l/min
Noise and vibration				
Environmental noise (LwA)		101 dB(A)		101 dB(A)
Whole-Body Vibration (ISO 2631-1)		1.07 m/s ²		1.07 m/s ²
Vibration to whole hand/arm		1.50 m/s ²		1.50 m/s ²

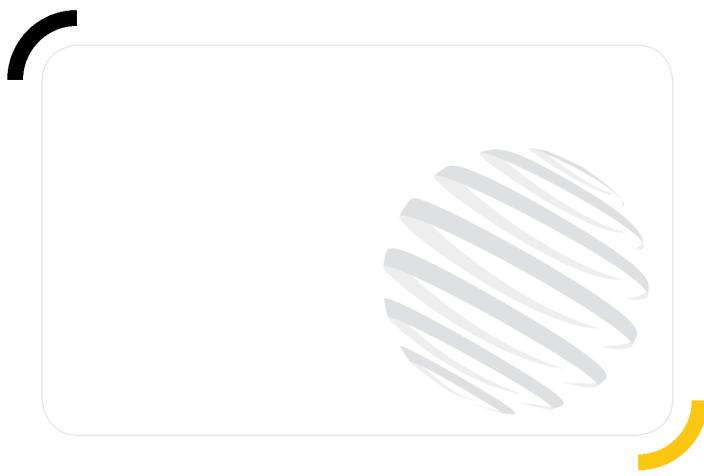

GEHL®

Siège Social
P.O. Box 179 - One Gehl Way - West Bend, WI, USA 53095
Tel: (262) 334-9461 - Fax: (262) 338-7517
www.gehl.com



This brochure describes versions and configuration options for Gehl products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Gehl reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Gehl dealer. Non-contradictorial document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Gehl and may not be used without authorization. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU EQUIPMENT AMERICAS, LLC - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS West Bend