

GEHL®

RS6-34 TIER IV TELESCOPIC HANDLER



STANDARD FEATURES

ALL-NEW!

- 74 hp (55 kW) Deutz TD 3.6 L4 Tier IV-Certified Engine
- 288 ft.lbs. (390 Nm) of Torque at 1300 rpm
- Engine Cover - Now Standard Equipment
- Single Key Start
- Transmission Clutch Cut-Off
- Power Port In Cab
- Horn Centered in Steering Column
- A/C Option Available
- Diagnostic Display on Dash

- Right Hand Side Mounted Rear View Mirror
- Four Wheel Wet Disc Brakes
- Engine Block Heater
- Power Steering
- Left Hand Front Fender
- Selective Steering (Front Wheel, All Wheel, and Crab)
- 12-Volt Electric System
- Storage Compartment Under Seat
- DYNATTACH® Quick Carriage Release
- Dual Element Air Filter with Restrictor Indicator
- Automatic Self-Leveling Fork System
- Boom Control Joystick
- Fork Tilt and Frame Level Joystick
- SAHR Parking Brake
- Reverse Warning Horn
- 3 Speed Forward/Reverse Powershift Transmission
- Brake Lights and Back Up Light
- Planetary Axles With an Open Center Differential
- Engine Temperature, Fuel, and Hourmeter Gauges
- Full Time Four Wheel Drive


RS6-34 TIER IV

TELESCOPIC HANDLER

SPECIFICATIONS

CAPACITIES	Lift Capacity (kg)	6,000 lbs. (2722)
	Maximum Lift Height (m)	34'3" (10.4)
	Capacity at Maximum Lift Height (kg)	4,000 lbs. (1815)
	Maximum Forward Reach (m)	23'3" (7.0)
	Capacity at Max. Forward Reach (kg)	900 lbs. (409)
	Max. Reach Below Grade (mm)	24" (610)
ENGINE	Manufacturer	Deutz
	Power (kW)	74 hp (55)
	Aspiration	Turbocharged
	Model	TD 3.6 Tier IV
	Rated Speed	2300 rpm
COMPONENTS	Transmission	Dana 3-speed Powershift
	Maximum Travel Speed (km/hr)	18.0 mph (28.9)
	Selective Steering	4-wheel 2-wheel Crab
	Hydraulically Actuated Internal Wet-Disc Brakes	4-Wheel
	Parking Brake	Spring-Applied, Hydraulic Release (SAHR) on Front Axle
	Axle Manufacturer	Dana
HYDRAULIC SYSTEM	Pump Type	Gear
	Total Capacity (L/min)	29 gpm (110)
	System Pressure (bar)	3,000 psi (207)
	Hydraulic Reservoir Capacity (L)	35 gal. (133)
GENERAL SPECIFICATIONS	Approximate Weight (kg)	15,100 lbs. (6850)
	Length – Less Forks (m)	16'0" (4.9)
	Width (m)	7'10" (2.4)
	Ground Clearance (mm)	14" (350)
	Wheelbase (m)	9'2" (2.8)
	Turning Radius (m)	12'6" (3.8)
	Overall Height (m)	7'10" (2.4)
	Frame Leveling	±10°
	Fuel Capacity (L)	29 gal. (110)
	Tire Options	15.00 x 19.5/12 PR 15.00 x 19.5/12 PR Foam-Filled 15.00 x 19.5 Solid Rubber

LOAD CHART

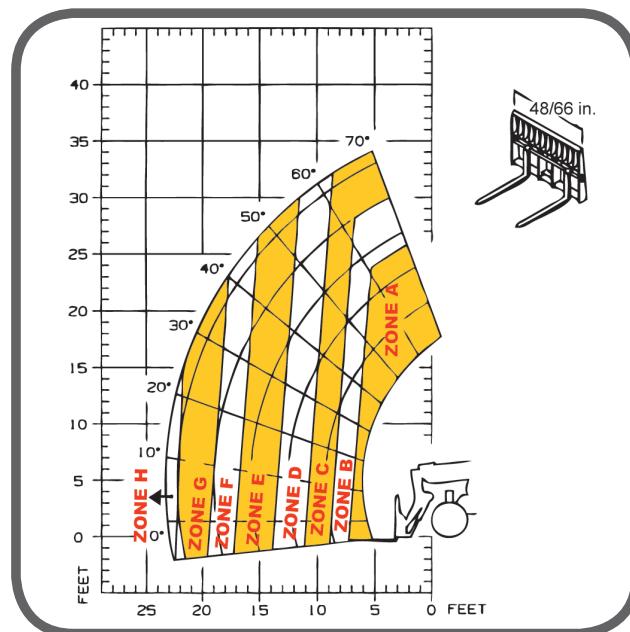

A	6,000 lbs. (2722 kg)	E	2,000 lbs. (907 kg)
B	5,000 lbs. (2268 kg)	F	1,500 lbs. (680 kg)
C	4,000 lbs. (1814 kg)	G	1,000 lbs. (454 kg)
D	3,000 lbs. (1361 kg)	H	900 lbs. (408 kg)

For more information on Gehl equipment, call our hotline at

1-800-628-0491
or visit gehl.com

Gehl reminds users to read and understand the operator's manual before operating any equipment. Also, make sure all safety devices and shields are in place and functioning properly.

Gehl reserves the right to add improvements or make changes in features and specifications at any time without notice or obligation.

