




MODEL 900 NGL TRAVELING TAIL TRAILER

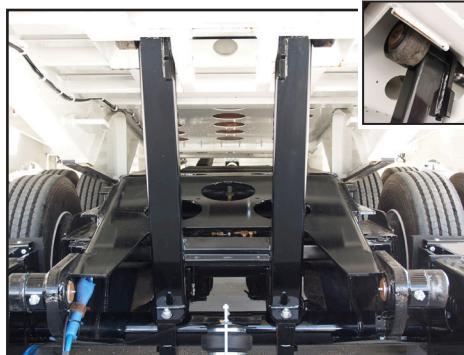

- Reduce Maintenance Cost with Centralized Grease System
- Individual Zerks for Each Service Point Including Slacks and S-Cams
- Easily Accessible from Rear of Trailer at One Location

- Stable, Rigid Dock Arm Engages in Pockets under Tail
- Tail Raises to Match Dock Height up to 57" High
- Air Bag Inflates to Engage Dock Arm while the Undercarriage Travel Raises the Tail

- Grote "Ultra-Blue" Wiring Harness with LED Lighting System
- Grote Supplied Multi-Year Warranty
- Plug 'n Go Modular Design with Double Seal Technology Provides Protection from Moisture and Contaminants



- Low Load Angle on Tail
- Allows for Loading Low Clearance Equipment
- Standard Double Keyhole Tie Downs
- Optional Landoll Steel Traction Plate for Increased Traction



- Lighted Control Panel
- One Hydraulic Control to Load and Unload Trailer
- One Hydraulic Control for Winch
- Optional Wireless Remote Control
- Adds Driver Safety and Efficiency



- Optional Upper Deck Air Ramp
- Low Profile Design for Ease of Loading Upper Deck
- Landoll Traction Plate on Slope and Ramp for Added Safety
- Spring Loaded Ramp Supports Hex Pivot Shaft with Sealed Bearings



Proven Solutions for Your Hauling Needs!
1-800-428-5655 | www.landoll.com/trailers



Standard & Optional Equipment / Features

Model 900 NGL Traveling Tail



S=Standard O=Optional

MODEL 950	50 TON	100,000 lbs.	MODEL 950	50 TON	100,000 lbs.
MODEL 930	35 TON	70,000 lbs.	MODEL 930	35 TON	70,000 lbs.
MAIN FRAME			WINCHES AND ACCESSORIES		
- Fabricated 80,000 and 100,000 PSI	S	S	- Upper Deck 12,000 lb. Worm Gear with 85' Cable with Wear Plate	S	S
- Four Beam Design	S	S	- Upper Deck 20,000 lb. or 30,000 lb.	O	O
- Capacity - 70,000 lb. Distributed / 50,000 lb. Concentrated in 10'	S	S	- Slope Mount Winch Optional - 12,000 lbs., 15,000 lbs., 20,000 lbs.	O	O
- Capacity - 100,000 lb. Distributed / 70,000 lb. Concentrated in 10'	S	S			
KINGPIN SETTING			SLOPE RAMP		
- 18" Setting	S	S	- Upper Deck Ramp (Air Operated)	O	O
- 84" Swing Clearance	S	S			
CROSSMEMBERS			AXLES		
- 4" Jr. I-Beam and 3" Jr. I-Beam on 8" Centers	S	S	- (2) 25,000 lb. Dual Tire, Oil Bath Bearings, Outboard Brake Drum	S	S
			- (3) 25,000 lb. Dual Tire, Oil Bath Bearings, Outboard Brake Drum		
DECK AND FEATURES			SUSPENSION		
- 102" Wide	S	S	- Neway Air Ride RLU228 22,500 lb. Capacity with Manual Dump Valve	S	S
- 90° Slope Drop	S	S			
- 38" Deck Height (Loaded)	S	S	BRAKES		
- 1 1/8" Nominal Apitong (Lower Deck)	S	S	- Automatic Slack Adjusters	S	S
- 20" Loaded Ground Clearance	S	S	- 12.25x7.5 Full Air with Spring Brakes	S	S
			- ABS, Wabco 4S2M	S	S
TAIL			TIRES / RIMS		
- 12' (15° Load Angle)	S	S	- 235 75R 17.5 Double Coin	S	S
Model 930 / 950-45-12 (Lower Deck Length 35'3")	S	S	- 17.5x6.75 Tubeless, Hub Pilot Rim	S	S
Model 930 / 950-48-12 (Lower Deck Length 38'3")	S	S			
- 14' (12° Load Angle)	S	S	HYDRAULIC POWER SOURCE		
Model 930 / 950-50-14 (Lower Deck Length 40'3")	S	S	- Truck Mount Air Shift PTO, Pump and Hydraulics Res	O	O
- 15' (11° Load Angle)	S	S	- Self Contained Hydraulic System Under Slope Mount or Upper Deck	O	O
Model 930 / 950-48-15 (Lower Deck Length 38'3")	S	S	- Hydraulic Quick Couplers 2,500 PSI - 20 GPM at Controls,	S	S
Model 930 / 950-51-15 (Lower Deck Length 41'3")	S	S	50 GPM Max		
- Flush Double Key Hole Side Chain Slots	S	S	ELECTRICAL		
- Flat Approach Plate with (6) Tie Down Keyholes	S	S	- 7-Way Receptacle (Electrical)	S	S
- Apitong Wood Covered	S	S	- Grote LED with Chrome Bezel 10-Year Warranty, Wiring Harness	S	S
- Lifting Capacity - 24,000 lb.	S	S	Grote "Ultra Blue Seal" 7-Year Warranty		
TIE DOWNS / CHAIN GOTCHAS			FINISH / COLOR		
- Double Key Hole Chain Slots / Gotchas on 16" Centers	S	S	- Steel Grit Shot Blast to Bright Metal	S	S
TOOL BOX			- Zinc Rich Primer	S	S
- Twin Lockable Upper Deck Mounted with Lockable Door	S	S	- TGIC Polyester Powder Coat	S	S
(7" H x 34" W x 29" D)			White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Dark Gray		
WEIGHT (ESTIMATED)					
- 930-48-12 16,300 lbs. +/- 3%					
- 930-51-15 18,000 lbs. +/- 3%					
- 950-48-12 19,000 lbs. +/- 3%					
- 950-51-15 19,890 lbs. +/- 3%					



Call 1-800-428-5655

Proven Solutions for Your Hauling Needs!

www.landoll.com/trailers

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

Remember: Quality is Always a Bargain!



900NGLSeries
0616