



# MODEL 317/318 TRAVELING AXLE

**35 OR 55 TON**

The 317 and 318 trailers feature a one-piece, 4-beam frame designed with low-load and a 29" full width, rigid flat approach plate. Operators can easily and safely load a wide variety of equipment without the use of ramps or blocks, eliminating the possibility of damage from high centering or dragging the load over an abrupt approach. The Landoll approach plate can be used for additional load deck space and has four tie down chain slots.

The 317 series is ideal for transporting forklifts, asphalt pavers, and other low profile equipment.



- Optional 62,000 lb. Dock Level Hydraulics
- Load from Ground to 57" Dock Height

## **Field Installed Options**


- Self Contained Hydraulic Power
- Dock Level Hydraulics
- Remote Controls
- Bulkheads



- Easy to Operate Hydraulic Controls
- Selector Valve for Dock Legs



- Additional Loaded Deck Space
- Equipped with Four Tie Down Slots
- Full Width Flat Approach Plate, No Hinge
- Load a Wide Variety of Equipment

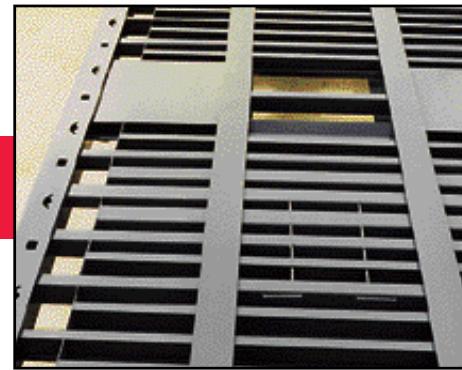

- Fabricated Four I-Beam Frame
- Jr. I-Beam on 8" Centers
- Heavy Duty Steel Plate Over Wheels



**Proven Solutions for Your Hauling Needs!**  
**1-800-428-5655 | [www.landoll.com/trailers](http://www.landoll.com/trailers)**



# Standard & Optional Equipment / Features

## Model 317 / 318 Traveling Axle

S=Standard O=Optional

MODEL 318	50 TON	100,000 lb.	MODEL 318	50 TON	100,000 lb.
MODEL 317	35 TON	70,000 lb.	MODEL 317	35 TON	70,000 lb.
<b>MAIN FRAME</b>			<b>PARKING STANDS</b>		
- Fabricated 100,000 PSI and 80,000 PSI Yield Steel	S	S	- Two Speed Landing	S	S
- Four Beam Frame Design	S	S	- Hydraulic Parking Stands	O	O
- Capacity - 70,000 lb. Distributed 50,000 lb. Concentrated in 10'	S	S	- Pin Drop	O	O
- Capacity - 100,000 lb. Distributed 70,000 lb. Concentrated in 10'	S				
<b>KINGPIN SETTING</b>			<b>AXLES</b>		
- 24" Setting / 70½" Swing Clearance	S	S	- (2) 25,000 lb. Dual Tire, Oil Bath Bearings	S	S
- 18" Setting / 76½" Swing Clearance	O	S	- (3) 25,000 lb. Dual Tire, Oil Bath Bearings		
- 26" Setting / 74½" Swing Clearance	S	S			
<b>CROSSMEMBERS</b>			<b>SUSPENSION</b>		
- 4" Jr. I-Beams on 8" Centers	S	S	- Neway RLU228 Air Ride, 22,500 lb. Capacity	S	S
- 4" Jr. I-Beam on 8" Centers	S	S	- Spring Suspension Transpro Mono Leaf	O	O
<b>DECK AND ACCESSORIES</b>			- Dock Level Hydraulics - 62,000 lb.	O	O
- 48', 50', 53' Overall Length	O	O	- Two Pair of 62,000 lb. (Not Available with Spring Suspension or Low Profile Tires)	O	O
- 102" Width	S	S	- Centralized Grease System	S	S
- 96" Width (Consult Factory)	O	O			
- 38" Deck Height (Loaded)	S	S	<b>BRAKES</b>		
- 1½" Apitong Wood Deck	S	S	- Automatic Slack Adjusters	S	S
- 1/8" Steel Tread Plate	O	O	- 12½" x 7½" Full Air / ABS 4S2M	S	S
- 45° Slope Drop	S	S	- Steel Out Board Brake Drums	S	S
- 24" Pull-Out Side Extension or 12" Outrigger Swing Out	O	O	- Spring Brakes on 2 Axles	S	S
- Flat Approach Plate with Four Key Hole Tie Downs	S	S			
- Load Angles 8½"	S	S	<b>OIL SEAL HUBS / RIMS</b>		
- Extra Web Mounted Lights	O	S	- Internal Mated Assembly	S	S
- Forklift Package (Additional Crossmembers / Capacity)	S	S	- 6¾" x 17½" Tubeless 8 Hole Hub Pilot Disc Type	S	S
- Deck Strap 1¼" x 9" (for Track Area)	O	O			
- Rub / Chain Rail - Web Mount	O	O	<b>TIRES</b>		
- Skid Plate for Container ¾" x 6"	O	O	- 235/75R 17.5 Double Coin	S	S
- Toe Board ¾" x 2½" on Lower Deck	O	O	- 235/75R 17.5 Michelin	O	O
- Twin Upper Deck Mounted Tool Box with Lockable Door	S	S	- 255/R22½ Goodyear Tires on Hub Pilot Type Rims	O	O
- Web Mounted Tool Box, Lower Deck	O	O	16½" x 7" Full Air / ABS 4S2M		
			7½" x 22½" Tubeless 10 Hole Pilot Disc Type		
<b>WINCHES AND ACCESSORIES</b>			Spare Tires and Rims Available in Standard & Optional Sizes		
- Worm Gear 12,000 lb. with 85' of ½" Cable	S	S	- Spare Tire Carrier 48" Bulkhead, Front or Rear Mounted	O	O
- Worm Gear 20,000 lb. with 85' of ¾" Cable	O	O	- Dual Spare Tire Carrier 48" Bulkhead, Front Mounted	O	O
- Planetary Winch	O	O			
- Pivoting Cable Roller Guide for Winch (Top Deck Only)	O	O	<b>WHEEL ACCESSORIES</b>		
- Cable Roller Guide for Winch	O	O	- Stainless Steel Wheel Covers - 6¾" x 17½"	O	O
- Air Tension / Air Operated Winch Free Wheel (Available with Pivoting Cable Roller Guide - 20,000 lb. Winch Top Deck Mount)	O	O	- Hubometer (Not Available with Stainless Steel Wheel Covers)	O	O
- Location for Second Winch Available for All Winch Sizes	S	S			
- Multi-Function Wireless Remote Control	O	O	<b>HYDRAULIC POWER SOURCE</b>		
- LED Winch Lights	O	O	- Quick Couplers / 2,500 PSI - 15 GPM	S	S
- Bolt-On "D" Ring at Winch	O	O	- Air Shift PTO and Wet Kit for Tractor - Not Installed	O	O
<b>TIE DOWNS / CHAIN GOTCHAS</b>			- 25 HP Engine Pkg.*	O	O
- Double Key Hole Chain Slots Located on 32" Centers	S	S	*Slope Mounted, Upper Deck or Front Extension Mount		
- Alternating Stake Pockets on 32" Centers	S	S	- Engine Cover for Upper Deck or Extension Mount	O	O
- Extra Recessed Mounted "D" Rings - Lower Deck Only	O	O			
- Extra Flush Mounted "D" Rings	O	O	<b>AIR / ELECTRICAL CONNECTION</b>		
- Ratchet Winch for 4" Nylon Strap - Weld On	O	O	- Glad Hand 7-Way Receptacle	S	S
<b>BULKHEADS</b>					
- 16" / 24" 2-Position Bulkhead / Front Extension (Solid)	O	O	<b>WIRING HARNESS / LIGHTS</b>		
- 48" High Mesh, 96" or 102" Width	O	O	- Grote "Ultra Blue Seal" System	S	S
- Bolt-On Binder Storage Rack for 48" Bulkheads	O	O	- Grote LED Rubber Grommet Mounted with 10-Year Warranty	S	S
- LED Work Light - Dual (Mounted on Bulkhead)	O	O	- Center Mounted Side Turn Signal	S	S
Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory.			<b>FINISH / COLOR</b>		
			- Steel Grit Shot Blast to Bright Metal	S	S
			- TGIC Polyester Powder Coat		
			White, Black, Yellow, Blue, Red, Green		
			<b>WEIGHT</b>		
			- 48' - 17,000 lbs. (approximate base)	S	S
			- 48' - 20,000 lbs. (approximate base)		

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory.

**Call 1-800-428-5655**

**Proven Solutions for Your Hauling Needs!**

**www.landoll.com/trailers**

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

**Remember: Quality is Always a Bargain!**

