




MODEL 330 CONTAINER TRAILER

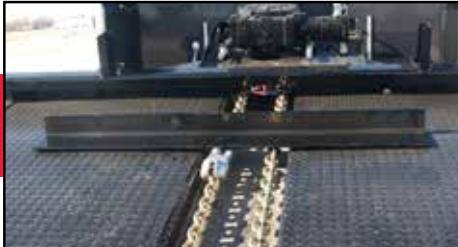

- Heavy duty frame and undercarriage are built for many years of rugged service and strong enough to haul other rental equipment or automotive vehicles.

- Standard features include heavy duty side rails and centering onto the trailer deck.

- The standard four strap winches with opposing hooks and 4 "D" ring tie downs are conveniently located for efficiently securing the container.



- The rugged approach plate quickly lifts and then aligns the container for loading.

- The 12,000 lb. worm gear winch is standard equipment.
- Adjustable container stops offer flexibility to haul various lengths of containers.

- Conveniently located hydraulic controls are easy to understand and provide safe operation.
- The optional self-contained engine hydraulics supply all hydraulic power needed for full operations of the trailer function (not pictured).



Proven Solutions for Your Hauling Needs!
1-800-428-5655 | www.landoll.com/trailers



Standard & Optional

Equipment / Features



MODEL 330 Standard Equipment




- Jost 2-Speed Crank Down Landing Gear
- 4 "D" Rings
- 4 Ratchets with Hooks



- Left Side Tool Box 42" W x 28" D x 9" H
- Centralized Grease System



Patent Rights Reserved

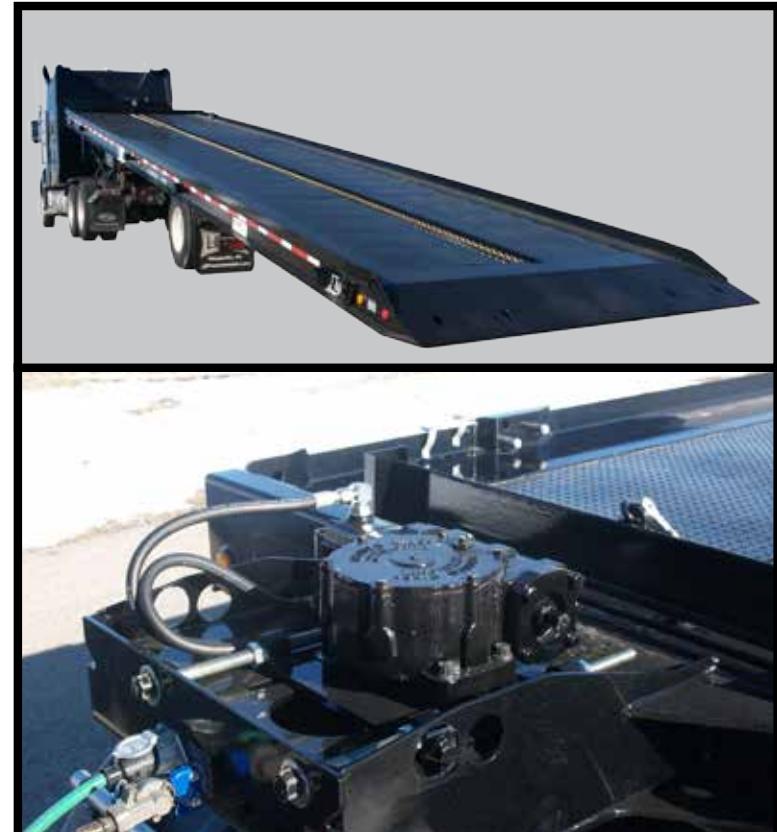

Included with Chain Drive Option



Bridle Chain with Twist Locks



Front Side Pin Lock Down



Push Bar

MODEL 330 Optional Equipment





Standard & Optional Equipment / Features

Model 330 Container Trailer

S=Standard O=Optional

| MODEL 330B-2 | 25 TON | 50,000 lbs. | MODEL 330B-2 | 25 TON | 50,000 lbs. |
|--|--------|-------------|--|--------|-------------|
| MODEL 330B-1 | 8 TON | 16,000 lbs. | MODEL 330B-1 | 8 TON | 16,000 lbs. |
| MAIN FRAME | | | PARKING STANDS | | |
| - Fabricated 80,000 PSI Yield Beams | S | S | - Pin Drop | O | O |
| - Four Beam Frame | S | S | - Two Speed Crank Down Landing Gear | S | S |
| - Capacity - 16,000 lbs. Distributed 10,000 lbs. Concentrated in 10' | S | S | | | |
| - Capacity - 50,000 lbs. Distributed 20,000 lbs. Concentrated in 10' | S | S | | | |
| KINGPIN SETTING | | | AXLES | | |
| - 30" Setting / 72" Swing Clearance | S | S | - (1) 25,000 lbs. Dual Tires, Oil Bath Bearings | S | S |
| - 18" Setting on 90° Drop / 72" Swing Clearance | S | S | - (2) 25,000 lbs. Dual Tires, Oil Bath Bearings | S | S |
| - 24" Setting / 77½" Swing Clearance | S | S | | | |
| CROSSMEMBERS | | | SUSPENSION | | |
| - 3½" x 3½" Tube on 18" Centers | S | S | - Transpro Mono Leaf 22,000 lb. Capacity per Axle | S | S |
| | | | - Air Ride in Lieu of Spring | O | O |
| | | | - Low Load Angle 9½" *(48' Only) | O | O |
| DECK AND ACCESSORIES | | | BRAKES | | |
| - 42' Overall Length or 48' Overall Length | S | S | - 16.5x7 Full Air / Spring Brakes, ABS 2S1M | S | S |
| - 102" Width | S | S | - 16.5x7 Full Air / Spring Brakes, ABS 4S2M | S | S |
| - 44½" Deck Height (Loaded)(Spring Ride)(Single Axle)(At Rear Axle) | S | S | - Steel Out Board Brake Drums | S | S |
| - 47" Deck Height (Loaded)(Air Ride)(Tandem Axle)(At Rear Axle) | S | S | | | |
| - ½" Steel Tread Plate, 5" Cable Trough - Full Length | S | S | OIL SEAL HUBS / RIMS | | |
| - Formed Angle Skid Plate / Side 5½" x 12" x 3-½" | S | S | - Internal Mated Assembly | S | S |
| - 12° Load Angle | S | S | - 22.5x8.25 Tubeless 10-Hole Hub Pilot Disc Type | S | S |
| - 90° Drop in Lieu of Straight | O | O | | | |
| - Under Deck Tool Box (42"x28"x9") | O | O | TIRES | | |
| - 29" Approach Plate with (4) Keyhole Tie Downs | S | S | - 255/70R 22.5 Double Coin | S | S |
| - 1 Pair Adjustable Container Stops on Straight Trailer | S | S | - 255/70R 22.5 Michelin in Lieu of Standard Spare Tires and Rims | O | O |
| - Light for Hydraulic Controls | O | O | Available in Standard & Optional Sizes | | |
| - Centering Boards (2 Front, 2 Rear) | O | O | | | |
| WINCHES AND ACCESSORIES | | | WHEEL ACCESSORIES | | |
| - Worm Gear 12,000 lb. with 85' of ½" Cable | S | S | - Hubometer | O | O |
| - Worm Gear 20,000 lb. with 85' of ¾" Cable | O | O | | | |
| - Wireless Remote Control | O | O | HYDRAULIC POWER SOURCE | | |
| - Cable Roller Guide for Winch | O | O | - Quick Couplers / 2,500 PSI - 15 GPM | S | S |
| - Slope Roller (Recommended for 90° Drop) | O | O | - Air Shift PTO and Wet Kit for Tractor - Not Installed | O | O |
| | | | - 25 HP Engine Pkg. (Upper Deck Mounted with Cover) | O | O |
| TIE DOWNS / CHAIN GOTCHAS | | | AIR / ELECTRICAL CONNECTION | | |
| - (4) "D" Rings - 2-Per Side, (4) 4" Strap Ratchets Curbside with Opposing Hooks Street Side | S | S | - Glad Hand 7-Way Receptacle | S | S |
| - Extra Flush Mounted "D" Rings | O | O | | | |
| - Extra Ratchet Winch for 4" Nylon Strap - Weld On (Less Straps) | O | O | LIGHTS | | |
| | | | - Grote "SuperNova" LED 10-Year Warranty, Grote "Ultra Blue Seal" Wiring Harness 7-Year Warranty | S | S |
| | | | - Center Mounted Side Turn Signal | S | S |
| BULKHEADS | | | | | |
| - 16" / 24" 2-Position Bulkhead / Front Extension (Solid) | O | O | FINISH / COLOR | | |
| - 48" High Mesh, 102" Width | O | O | - Steel Grit Shot Blast to Bright Metal | S | S |
| - Bolt-On Binder Storage Rack for 48" Bulkheads | O | O | - TGIC Polyester Powder Coat | S | S |
| - LED Work Light - Dual (Mounted on Bulkhead) | O | O | White Black Yellow, Blue, Red, Green | | |
| - Spare Tire Carrier 48" Bulkhead Front Mount | O | O | | | |
| - Spare Tire Carrier 48" Bulkhead Rear Mount | O | O | | | |
| - Dual Spare Tire Carrier 48" Bulkhead Front Mount | O | O | | | |

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory.

Call 1-800-428-5655

Proven Solutions for Your Hauling Needs!

www.landoll.com/trailers

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

Remember: Quality is Always a Bargain!



000/0814