





MODEL 400A NGL TRAVELING AXLE TRAILER

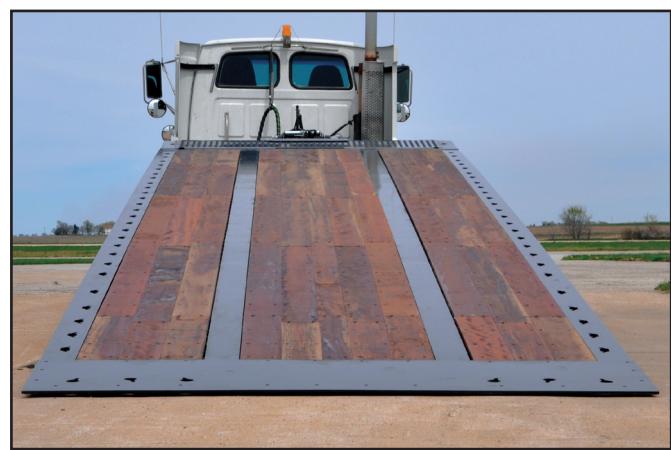

Proven Solutions for Your Hauling Needs!
1-800-428-5655 | www.landoll.com/trailers

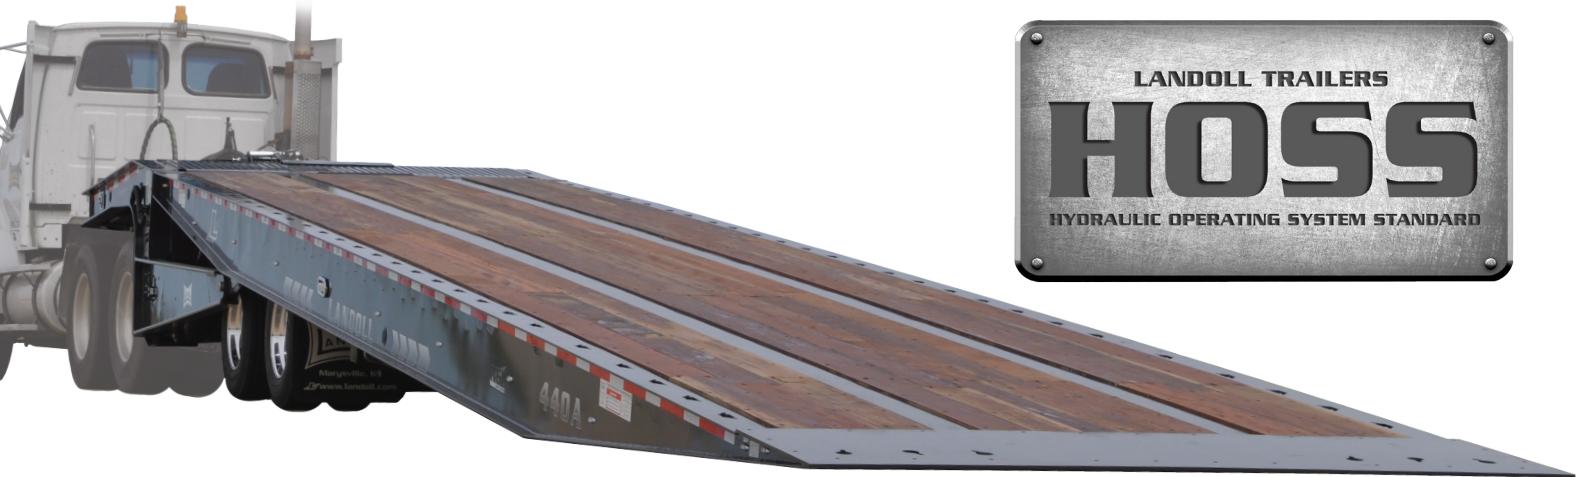

Standard & Optional Equipment / Features

Model 400A Traveling Axle Trailer




S=Standard O=Optional

MODEL 455A	55 TON	110,000 lbs.	
MODEL 440A	40 TON	80,000 lbs.	
MAIN FRAME			
- Fabricated 80,000 and 100,000 PSI Yield Beams	S	S	
- Four Beam Design	S	S	
KINGPIN SETTING			
- 21" Setting	S	S	
- 80" Swing Clearance	S	S	
- 2" 5th-Wheel Kingpin Hitch	S	S	
CROSSMEMBERS			
- Alternating 4" and 3" Jr. I-Beam on 8" Centers	S	S	
- 4" Jr. I-Beam on 8" Centers		S	
WINCH			
- 12,000 lb. Worm Gear with Spring Tension and 85' of 1/2" Cable	S	S	
- 20,000 lb. Worm Gear with Spring Tension and 85' of 5/8" Cable	O	O	
- 30,000 lb. Planetary 2-Speed with 85' of 5/8" Flex 9 Cable	O	O	
DECK AND FEATURES			
- 102" Wide	S	S	
- Deck Rating 50,000 lb. in 10'	S	S	
- Deck Rating 70,000 lb. in 10'		S	
- 90° Slope Drop	S	S	
- 37" Deck Height (Loaded)	S	S	
- 1 1/8" Apitong Hardwood Deck	S	S	
- Aluminum Pullouts to 13' Wide	O	O	
- 6.5° Load Angle	S	S	
ACCESSORIES			
- Flat Approach Plate with 6 Keyhole Tie Downs	S	S	
- Automatic Slack Adjusters	S	S	
- Main Deck Center Slope Roller	S	S	
- Upper Deck Slope Rollers	O	O	
TIE DOWNS / CHAIN GOTCHAS			
- Double Keyhole Chain Slots with Stake Pockets on 16" Centers	S	S	
TOOL BOX			
- Twin Side Mounted in Upper Deck with Lockable Doors 7" H x 34" W x 29" D Inside with 6.5" H x 11 1/2" W x 29" D Opening	S	S	

MODEL 455A	55 TON	110,000 lbs.	
MODEL 440A	40 TON	80,000 lbs.	
PARKING STANDS			
- Pin Drop	O	S	O
- Jost Two Speed Landing Gear			S
SUSPENSION / AXLES			
- Neway Air Ride RLU228 22,500 lb. Capacity	S	S	
- Dock Level Hydraulic 62,000 lb. Capacity (Not Available with 215/75R 17.5 low-pro tires)	O	O	
- Centralized Grease System	S	S	
- (2) 25,000 lb. Axles, Dual Tire, Oil Bath Bearings	S	S	
- (3) 25,000 lb. Axles, Dual Tire, Oil Bath Bearings		S	
BRAKES			
- 12.25x7.5 Full Air / Spring Brakes ABS, 4S2M	S	S	
TIRES / RIMS			
- 235/75R 17.5 Double Coin Tires	S	S	
- Tire Inflation System	S	S	
- 17.5x6.75 Tubeless Rims	S	S	
HYDRAULIC HOOK UP			
- Quick Couplers 2500 PSI / 20 GPM at Controls, 50 GPM Max	S	S	
LIGHTS			
- Grote LED with Chrome Bezel 10-Year Warranty, Grote "Ultra Blue Seal" Wiring Harness 7-Year Warranty	S	S	
- Center Mounted Side Turn Signal	S	S	
FINISH / COLOR			
- Steel Grit Shot Blast to Bright Metal	S	S	
- Zinc Rich Primer	S	S	
- TGIC Polyester Powder Coat	S	S	
White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Dark Gray			
WEIGHT (ESTIMATED)			
- 440-41' - 16,820 lbs. +/-3%	S	S	
- 440-48' - 18,575 lbs. +/-3%	S	S	
- 440-50' CA - 19,355 lbs. +/-3%	S	S	
- 440-53' - 19,610 lbs. +/-3%	S	S	
- 455-48' - 21,980 lbs. +/-3%	S	S	
- 455-50' - 23,010 lbs. +/-3%	S	S	
- 455-50' CA - 22,945 lbs. +/-3%	S	S	
- 455-53' - 24,485 lbs. +/-3%	S	S	

**MORE OPTIONS AVAILABLE
INCLUDING WIRELESS REMOTE CONTROL
KICKER ROLLERS OR RAILROAD DECK
CONSULT FACTORY**

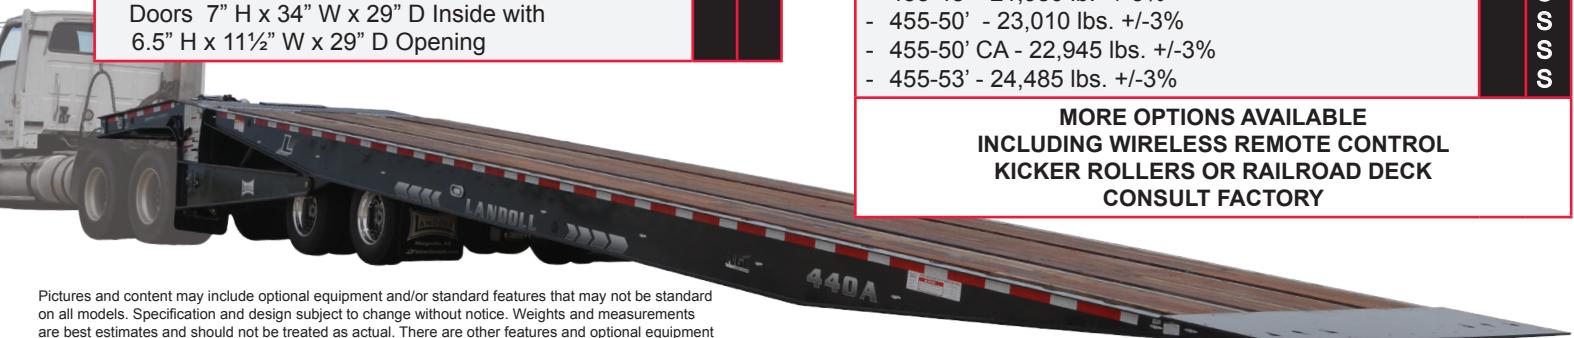

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory.

Call 1-800-428-5655

Proven Solutions for Your Hauling Needs!

www.landoll.com/trailers

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

Remember: Quality is Always a Bargain!

