




MODEL 835C/855C DETACHABLE GOOSENECK



- Full Length Recessed Boom Trough
- Dropped Wheel Bolster
- No Front Crossmember in Slope

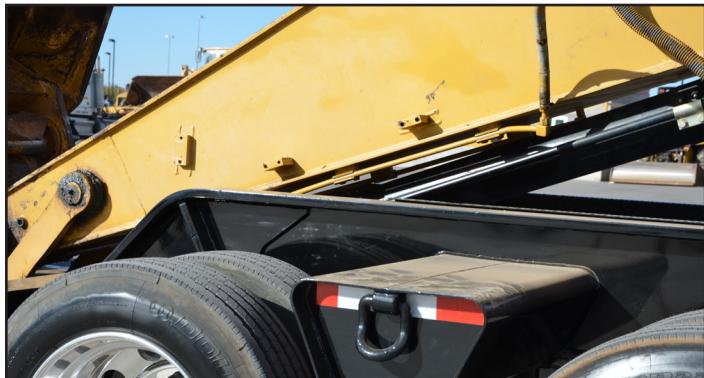

- Low Profile Approach Plate to Accommodate Rollers or Other Tricycle Track Machines - No Ramps Required
- Traction Bars on Approach
- 8 Keyhole Tie Downs



- Easily Adjust Ground Clearance from 6.5" to 18"
- Transport at 7 Height Positions while the Neck Remains Locked
- Optional Chain / Binder Rack and Storage Box between Arms



- Flip Brackets, Air / Electric Couplers
- "V" Type Rear Bumper
- High Visibility LED Lights
- Electrical Outlet for Rotating Lights
- Optional Rear Strobe LED Lighting



Proven Solutions for Your Hauling Needs!
1-800-428-5655 | www.landoll.com/trailers



Standard & Optional Equipment / Features

Model 835C/855C Detachable Gooseneck



S=Standard O=Optional

MODEL 835C	35 TON	70,000 lbs.		MODEL 835C	35 TON	70,000 lbs.
MODEL 855C	55 TON	110,000 lbs.		MODEL 855C	55 TON	110,000 lbs.
MAIN FRAME				STORAGE AREA		
- Fabricated 11 $\frac{1}{8}$ " Beam, 100,000 PSI			S	- (1) Between Main Frame at Front of Lower Deck (41"W x 24"L x 10"D)		S
- Fabricated 13" Beam, 100,000 PSI Flange			S	- (1) Between Main Frame at Front of Lower Deck (41"W x 21"L x 7"D) 1 at Rear of Lower Deck (32"W x 14"L x 7"D)		S
KINGPIN SETTING			S	SUSPENSION / AXLES		
- 15"			S	- Neway Air Ride 25,000 lbs. Capacity with Mechanical Ride Height Control Valve	S	S
- Dual Pins 15" and 33"			S	- (2) 25,000 lbs. Dual Tire, Oil Bath Bearings	S	S
CROSSMEMBERS			S	- (3) 25,000 lbs. Dual Tire, Oil Bath Bearings	S	S
- 6" High Tensile I-Beams on 21 $\frac{1}{8}$ " Centers			S	- 50" Spacing (835)	S	S
- 8" High Tensile I-Beams on 24" Centers			S	- 50" Spacing (855-48CA)	S	S
GOOSENECK, DECK AND ACCESSORIES			S	- 54" Spacing (855-53)	S	S
- 3rd Axle Ready			S	- Auto Slack Adjusters - All Axles	S	S
- 4th Axle Ready			S	BRAKES		
- 12" Swing-Out Outriggers			S	- 16.5x7 Full Air with Spring Brakes ABS 4S2M	S	S
- Lowered Bolster Between Tires			S	- 16.5x7 Full Air with Spring Brakes on 3 Axles ABS, 4S2M	S	S
- HD Sloped Front Approach with Traction Bars			S	TIRES / RIMS		
- 6' Recessed Bucket Trough at Rear of Lower Deck			S	- 255/70R 22.5 LRH	S	S
- Open Boom Trough with "V" Type Bumper			S	- 22.5x8.25 Steel	S	S
- One Pair Flag Holders			S	- 22.5x7.50 Aluminum	O	O
- Centralized Grease System - All Axles			S	- Hub Pilot / Steel Outboard Brake Drums	S	S
DECK AND FEATURES			S	HYDRAULIC HOOK UP		
- 102" Wide			S	- Hydraulic Quick Couplers / 2,500 PSI - 15 GPM	S	S
- 1 $\frac{1}{2}$ " Nominal Apitong in Track Area			S	LIGHTS		
- Full 2" Apitong Track Area			S	- Grote "SuperNova" LED 10-Year Warranty	S	S
CYLINDERS			S	- Grote "Ultra-Blue Seal" Wiring Harness 7-Year Warranty	S	S
- Main Gooseneck - Horizontally Mounted			S	FINISH / COLOR		
SWING CLEARANCE			S	- 400° Bake / Steel Grit Shot Blast	S	S
- 84"			S	- Zinc Rich Powder Primer	S	S
- Dual Swing, 108" and 90"			S	- TGIC Polyester Powder Coat	S	S
LOADED GROUND CLEARANCE			S	White, Black, Yellow, Blue, Red, Green		
- 6.5"			S	WEIGHT (BASE)		
LOADED DECK HEIGHT			S	- 51' - 835C - 17,870 lbs. +/- 3%	S	S
- 19.5"			S	- 53' - 855C - 24,900 lbs. +/- 3%		
- 18"			S	ESTIMATED WEIGHTS		
TIE DOWNS / CHAIN GOTCHAS			S			
- (24) Total, All Angled D-Rings, 7 Each Side Lower Deck, 1 on End of Each Bolster, 2 at Rear of Lower Deck, 2 at Top of Rear Slope, 2 at Rear of Trunnion			S			
- (22) Total, All Angled "D" Rings, 7 Each Side Lower Deck, 1 on the End of Each Bolster, 2 at Rear of Lower Deck, 2 at the Top of Rear Slope, 2 at Rear of Trunnion			S			

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory.

Call 1-800-428-5655

Proven Solutions for Your Hauling Needs!

www.landoll.com/trailers



1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

Remember: Quality is Always a Bargain!

