




MODEL 900 SERIES TRAVELING TAIL

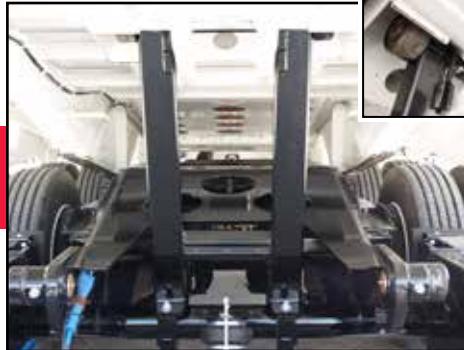

- Reduce Maintenance Cost with Centralized Grease System
- Individual Zerks for Each Service Point Including Slacks and S-Cams
- Easily Accessible from Rear of Trailer at One Location

- Stable, Rigid Dock Arm Engages in Pockets under Tail
- Tail Raises to Match Dock Height up to 57" High
- Air Bag Inflates to Engage Dock Arm while the Undercarriage Travel Raises the Tail

- Grote "Ultra-Blue" Wiring Harness with LED Lighting System
- Grote Supplied Multi-Year Warranty
- Plug 'n Go Modular Design with Double Seal Technology Provides Protection from Moisture and Contaminants



- Low Load Angle on Tail
- Allows for Loading Low Clearance Equipment
- Standard Double Keyhole Tie Downs
- Optional Landoll Steel Traction Plate for Increased Traction

- Lighted Control Panel
- One Hydraulic Control to Load and Unload Trailer
- One Hydraulic Control for Winch
- Optional Wireless Remote Control
- Adds Driver Safety and Efficiency

- Optional Upper Deck Air Ramp
- Low Profile Design for Ease of Loading Upper Deck
- Landoll Traction Plate on Slope and Ramp for Added Safety
- Spring Loaded Ramp Supports Hex Pivot Shaft with Sealed Bearings



Proven Solutions for Your Hauling Needs!
1-800-428-5655 | www.landoll.com/trailers



Standard & Optional Equipment / Features

Model 900 Series Traveling Tail

S=Standard O=Optional

MODEL 950	50 TON	100,000 lbs.	
MODEL 930	35 TON	70,000 lbs.	
MAIN FRAME			
- Fabricated 80,000 and 100,000 PSI	S	S	S
- Four Beam Design	S	S	O
- Capacity - 70,000 lb. Distributed / 50,000 lb. Concentrated in 10'	S	S	O
- Capacity - 100,000 lb. Distributed / 70,000 lb. Concentrated in 10'	S	S	O
KINGPIN SETTING			
- 18" Setting	S	S	O
- 84" Swing Clearance	S	S	O
CROSSMEMBERS			
- 4" Jr. I-Beam on 8" Centers	S	S	S
DECK AND FEATURES			
- 102" Wide	S	S	S
- 90° Slope Drop	S	S	S
- 38" Deck Height (Loaded)	S	S	S
- 1 1/8" Nominal Apitong (Lower Deck)	S	S	S
- 20" Loaded Ground Clearance	S	S	S
TAIL			
- 12' (15° Load Angle)	S	S	S
Model 930 / 950-45-12 (Lower Deck Length 35'3")	S	S	S
Model 930 / 950-48-12 (Lower Deck Length 38'3")	S	S	S
- 15' (11° Load Angle)	S	S	S
Model 930 / 950-48-15 (Lower Deck Length 38'3")	S	S	S
Model 930 / 950-51-15 (Lower Deck Length 41'3")	S	S	S
- Flush Double Key Hole Side Chain Slots	S	S	S
- Flat Approach Plate with (6) Tie Down Keyholes	S	S	S
- Apitong Wood Covered	S	S	S
- Lifting Capacity - 24,000 lb.	S	S	S
TIE DOWNS / CHAIN GOTCHAS			
- Double Key Hole Chain Slots / Gotchas on 16" Centers	S	S	S
TOOL BOX			
- Twin Lockable Upper Deck Mounted with Lockable Door (7" H x 34" W x 29" D)	S	S	S

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory.



Call 1-800-428-5655

Proven Solutions for Your Hauling Needs!

www.landoll.com/trailers

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

Remember: Quality is Always a Bargain!



900Series/0914