





# MODEL LT1016+4 & LT1020 UTILITY TAG TRAILER

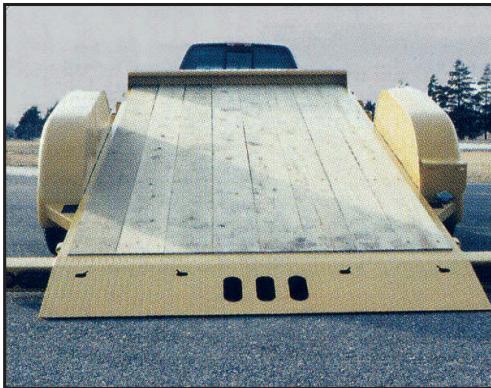

A full width rear light bar for added safety protection with machined safety approach plate.

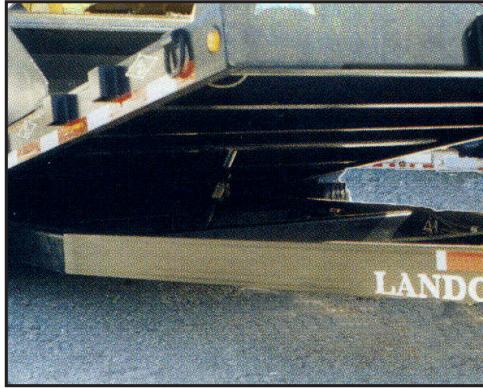

The Landoll tilt control system and the  $2\frac{1}{2}'' \times 16''$  cushion cylinder can hold the deck in a tilted position or smoothly return the deck to transport position.



**Proven Solutions for Your Hauling Needs!**  
**1-800-428-5655 | [www.landoll.com/trailers](http://www.landoll.com/trailers)**



# Standard & Optional Equipment / Features

## Model LT1016+4/LT1020 Utility Tag Trailer



S=Standard O=Optional

### MODEL LT1020 TILT DECK

### MODEL LT1016+4 TILT DECK

#### DIMENSIONS

- 16' Flat Deck and 4' Stationary
- 20' Flat Deck
- 22" Loaded Deck Height
- 80" Wide Between Fenders
- 102" O/A Width

S S S S S



A 6" channel iron frame under the main frame for superior strength. A solid formed 6" height headboard for protection. (Stake pockets shown for optional removable sideboards)

#### CAPACITY

- 10,000 lbs.
- 3,500 lb. Trailer Weight
- 13,500 lb. GVWR

S S S S S

#### MAIN FRAME

- 6" Channel
- 4" Jr. I-Beam Crossmembers
- 6" Channel Hitch Frame
- Tool Box Under Deck
- 12" Centers on Crossmembers
- (Required for Forklifts)

S S S S O O



#### AXLES

- (2) 6,000 lb. Torflex, E-Z Lube

S S

#### TIRES AND BRAKES

- LT235/80R 16LRE
- 12" x 2" Electric Brakes

S S S

#### DECK

- 2" Nominal CA-B Cooper Azole Treated Pine
- (6) 5/8" D-Rings
- (4) 5/8" D-Rings
- Stake Pockets 4 per Side
- Sideboards

S S S S O O



Adjustable hitch 12" to 24" vertically, plus 7,000 lb. drop leg jack are standard equipment.

Loading angle as low as 11.4°.

#### TIILT DECK

- 2 1/2" x 16" Cushion Cylinder
- Tilt Control Valve System
- Approach Plate Landoll Traction Plate
- Load Angle - 11.4°

S S S S

#### ACCESSORIES

- Fenders - HD 14 Gauge with Back
- Running Boards with Anti-Skid Tape
- 8,000 lb. Ramsey Electric Winch
- Spare Tire Carrier

S S S O O O

A heavy-duty bed lock-down with safety latch firmly secures the bed in transport position.

Exclusive Landoll traction plate for superior traction while loading rubber tired and small wheeled equipment on the approach plate.

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory.

**Call 1-800-428-5655**

**Proven Solutions for Your Hauling Needs!**



**www.landoll.com/trailers**

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

**Remember: Quality is Always a Bargain!**



LT1016+4-LT1020  
061715