



# MODEL LT1420 UTILITY TAG TRAILER



Toolbox



Deck Lock Latch



Gooseneck Connected to Hitch



**Proven Solutions for Your Hauling Needs!**  
**1-800-428-5655 | [www.landoll.com](http://www.landoll.com)**



# Standard & Optional Equipment / Features

## Model LT1420 Utility Tag Trailer

S=Standard O=Optional

### MODEL LT1420 TILT DECK

#### DIMENSIONS

- 20' Flat Deck
- 24" Loaded Deck Height
- 82½" Wide Between Fenders
- 102" O/A Width

S  
S  
S  
S

#### CAPACITY

- 14,000 lbs.
- 4,200 lb. Trailer Weight
- 18,200 lb. GVWR

S  
S  
S

#### MAIN FRAME

- 7" Channel
- 4" Jr. I-Beam, 80,000 PSI Yield on 12" Centers
- 6½" Fabricated Pintle Hitch Frame
- Tool Box Under Deck

S  
S  
S  
S



#### AXLES

- (2) 8,000 lb. Torflex, E-Z Lube

S

#### TIRES AND BRAKES

- 215/75R17.5 LRH
- Both 12" x 2" Electric Brakes

S  
S

#### DECK

- 2" Nominal CA-B Cooper Azole Treated Pine
- (4) ½" D-Rings
- Stake Pockets 2 per Side
- Sideboards
- 1½" Apitong Wood

S  
S  
S  
O  
O



Tilt Cylinder & Frame



Accumulator and Valve

#### TIILT DECK

- 2½" x 16" Cushion Cylinder
- Approach Plate Landoll Traction Plate
- Load Angle - 12.1°

S  
S  
S

#### ACCESSORIES

- Fenders - HD 14 Gauge with Back
- Running Boards with Anti-Skid Tape
- White, Black or Yellow Powder Coat Paint
- 8,000 lb. Ramsey Electric Winch
- Spare Tire Carrier


S  
S  
S  
O  
O

#### HITCH

- 3" Pintle Eye
- 2 5/16" Ball

S  
O

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory.

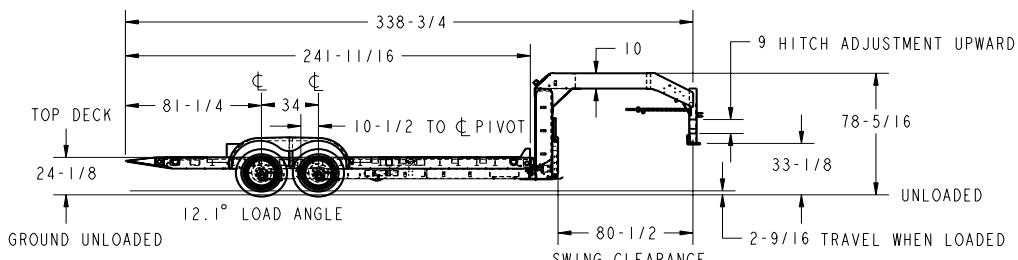

OPTIONAL G/N HITCH SHOWN



**Call 1-800-428-5655**

**Proven Solutions for Your Hauling Needs!**

**www.landoll.com**

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

**Remember: Quality is Always a Bargain!**

