



Ask Any Pro!™

BRD-280 BED REDEFINER

Keeps Flower Bed Edges in Shape

5 year
Consumer
Warranty

5 year consumer, 1 year commercial
and 90 day rental warranty.

EDGERS



- 28.1cc Power Boost Vortex™ Engine for Plenty of Cutting Power
- Six Finger Blade Design Provides a Sharp Edge
- Replaceable Blade with Carbide Tips
- Oversized High-Impact Nylon Shield with Guide Marker for Precise Cutting
- Rubber Handles for a Comfortable Grip
- Ergonomically Comfortable for Extended Use

www.echo-usa.com

BRD-280 BED REDEFINER



Ask Any Pro!™

The BRD-280 features the powerful 280 series, 28.1cc Power Boost Vortex™ engine. The unit has similar characteristics to a wheeled edger, but the primary difference is in the lower end, the gearbox and cutter. The gearbox is 90 degrees with a flex cable drive straight shaft. The cutting claw is manufactured from high-grade steel with specially designed carbide tips on each cutter for improved durability and performance. The claw has a unique geometric shape that, when cutting, creates a crisp beveled edge. The cutting claw also has a unique scraper fin that reduces clogging. The oversized shield directs debris inside the bed. It is also important to note, that the blade is a replaceable accessory.




28.1cc Power Boost Vortex™ engine

21.6 fl oz capacity see-through fuel tank

Rubber throttle control handle



A six-finger blade with carbide tips provides a sharp edge.




A rubber throttle handle provides comfortable all day operation. The left hand grip is also rubber-coated.



An over-sized, high-impact plastic shield features a guide marker for precise cutting.

59" straight shaft with flex cable drive

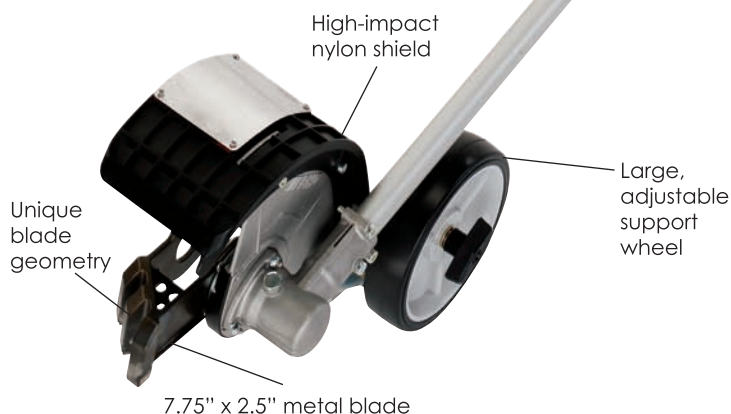

High-impact nylon shield

Large, adjustable support wheel

Unique blade geometry

7.75" x 2.5" metal blade



5 year consumer,
1 year commercial
and 90 day rental warranty.

BED REDEFINER SPECIFICATIONS

Model	Engine Displacement (cc)	Fuel Capacity (fl oz)	Starting System	Debris Shield	Blade Length (in)	Blade Thickness (in)	Dry Weight (lb.)
BRD-280	28.1	21.6	Standard	High-Impact Nylon	7.75	2.5	18.0