


H & S

1460/1660 HI-CAPACITY BI-FOLD RAKES



1460 / 1660 Hi-Capacity

H&S 1460 & 1660 hi-capacity bi-fold rakes have the raking wheels positioned ahead of the rake arms, main frame beams and transport wheels. Coupled with a high and wide end of frame, there are no hangup points or restrictions when raking the heaviest of hay crops.

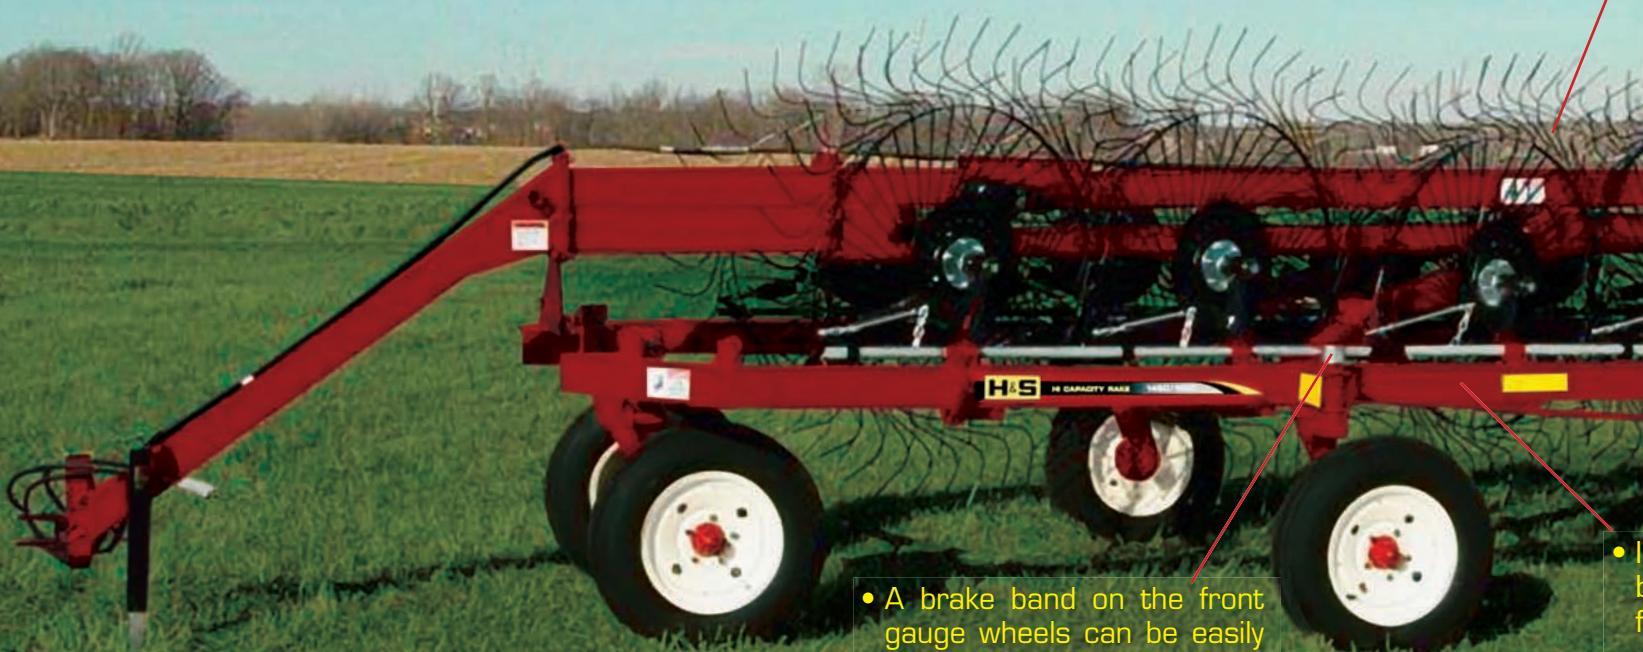

- A brake band on the front gauge wheels can be easily adjusted to field conditions.



- The standard wrap-a-round gauge wheels give added support to the rake beams.

- Storage for transport locks

- Independent rake wheel suspension allows the rake wheels to follow the contour of the ground and low maintenance "Bee Hive" style springs support the large 60" rake wheels.


- A large diameter rake wheel hub is used for added strength to the rake wheel dish.



- The rake arms feature 2 ball on each end of the arm for smooth operation and less wear on the bushings.

RAKE FEATURES

- Large 60" diameter rake wheels turn slower for less wear and deliver more capacity.

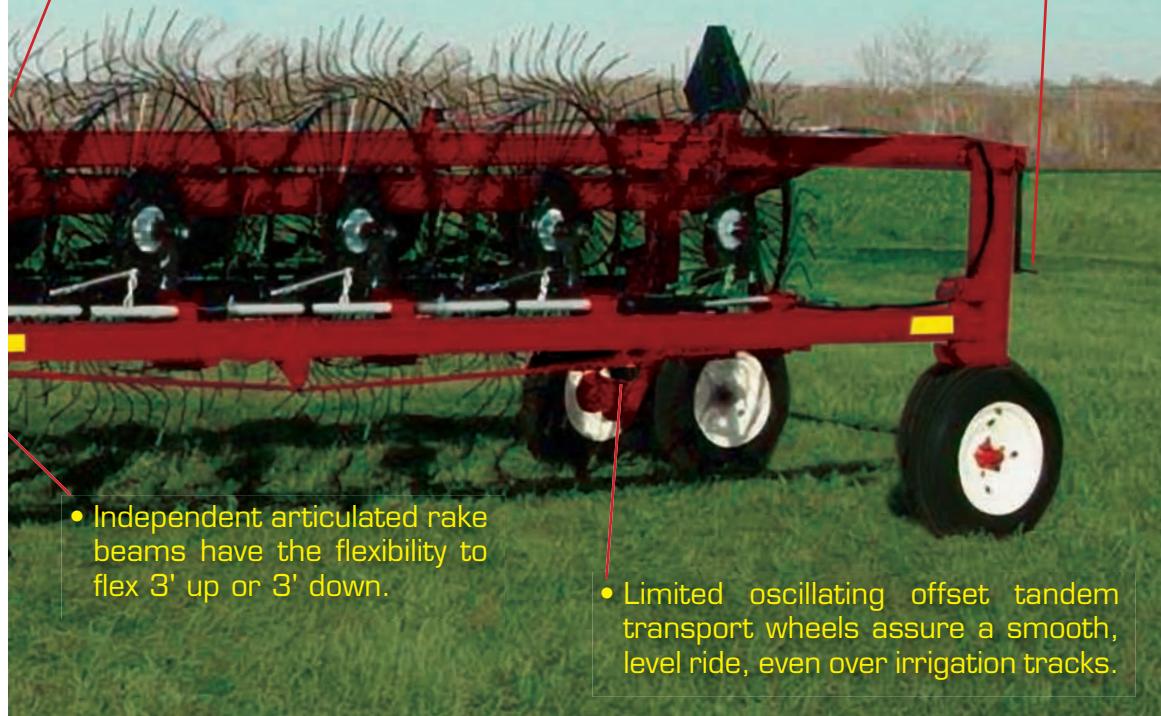

- Independent articulated rake beams have the flexibility to flex 3' up or 3' down.

- The windrow width adjustment is done with a hand crank and adjusts windrows from 38" to 58" in width.



- Setting the spring loaded stop allows you to set pre-determined raking widths up to 28' on the 1460 and 32' on the 1660. Raking widths can be hydraulically adjusted in any position up to the pre-determined raking width.



- 2 ball bearings per wheel for long life, less wear than




- The adjustment for the ground pressure on the rake wheels allows the operator to fine tune the 1460 and 1660 wheel rakes to fit varying conditions.




- By removing two pins, you have the capability to rake with only the right side of the rake.

BI-FOLD RAKES SPECIFICATIONS

	1460	1660
WHEEL DIAMETER	60"	60"
TEETH PER WHEEL	40	40
TOOTH DIAMETER	7.5MM	7.5MM
TRANSPORT WIDTH	8'8"	8'8"
TRANSPORT LENGTH	27'3"	30'3"
WINDROW WIDTH ADJUSTMENT	38" - 58"	38" - 58"
RAKING WIDTH	HYDRAULICALLY SET UP TO 28'	HYDRAULICALLY SET UP TO 32'
RAKING WHEEL HUBS	BALL BEARINGS	BALL BEARINGS
WING FLEX	3' UP OR DOWN	3' UP OR DOWN
NUMBER OF TRANSPORT WHEELS	8	8
HITCH JACK	STANDARD	STANDARD
GAUGE WHEELS	15"	15"
TRANSPORT WHEELS	15"	15"
WEIGHT	N/A	N/A
60" RAKE WHEEL WIND BOARDS	STANDARD	STANDARD
DUAL CENTER KICKER WHEELS	OPTIONAL	OPTIONAL
TRIPLE CENTER KICKER WHEELS	OPTIONAL	OPTIONAL
TRANSPORT LIGHTING & POWER CORD	OPTIONAL	OPTIONAL
SAFETY CHAIN	OPTIONAL	OPTIONAL

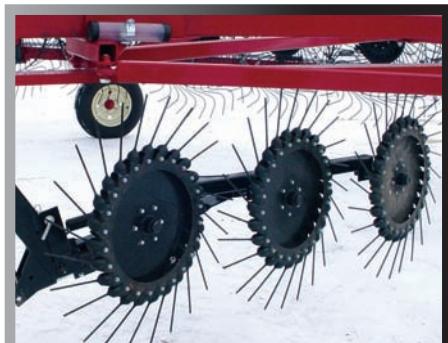

A 2 or 3 wheel center kicker assembly is optional for the Hi-Capacity rakes.

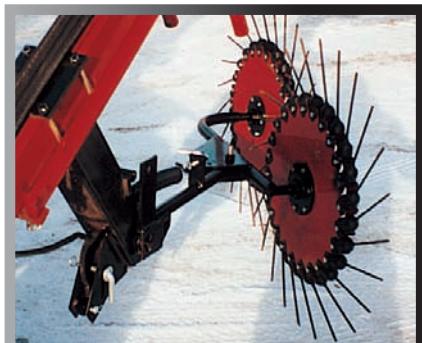

Rake wheel wind boards are standard on both models.

Warranty: See operators manual for warranty details and limitations. H&S reserves the right to change its products or the description at any time without notice or obligation.



Manufactured in U.S.A.



NEED A QR CODE READER? DOWNLOAD THE APP TO YOUR SMARTPHONE!

Buy the BEST **H&S**

Models and specifications are to change without prior notice.

11/14 4M

H & S MANUFACTURING CO. INC.
 2608 S. Hume Avenue
 P.O. Box 768 • Telephone (715) 387-3414
 FAX (715) 384-5463 • Website www.hsmfgco.com
MARSHFIELD, WI 54449



H&S WAREHOUSE 10145 Lakeshore Road
 P.O. Box 1260 • Telephone (716) 736-7595
 FAX (716) 736-7596 • Website www.hsmfgco.com
RIPLEY, NY 14775