

H&S

RR420 ROTARY RAKE



Specifications

Model	RR420
NUMBER OF ARMS	11
NUMBER OF DOUBLE TINES PER ARM	4
WORKING WIDTH	13'8"
GEAR BOX	Sealed in oil bath
ROTOR DIAMETER (WORKING WIDTH)	11'2"
TRANSPORT WIDTH	5'9"
PTO DRIVELINE WITH SLIP CLUTCH	540 rpm Constant Velocity Overload Protects Gearbox
TIRES	4 Mounted On Tandem Axles 18X8.5x8
HP REQUIRED	30/45
WEIGHT	1369 lbs



The adjustable front cylinder allows users to fine tune pitch the rake


A constant velocity P.T.O. with slip clutch lets the operator make even, uniform windows even in tight corners

An adjustable Cam allows the operator to set the teeth according to hay conditions



Sealed oil bath gearbox


Hydraulic lift cylinder

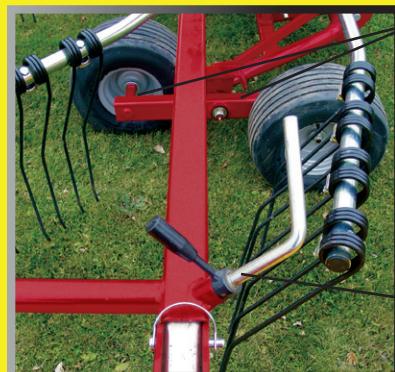

Tandem axle walking beam with 18x8.5x8 tires

Ground height adjustment

Adjustable swath shield

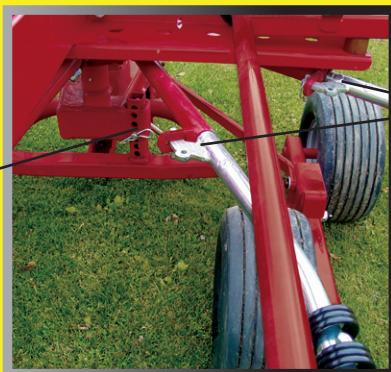

Quick remove tine arms

Warranty: See operators manual for warranty details and limitations.
H&S reserves the right to change its products or the description at any time without notice or obligation.



Manufactured in U.S.A.



NEED A QR CODE READER?
DOWNLOAD THE FREE APP
TO YOUR SMARTPHONE!

Buy the BEST
BUY **H&S**

Models & specifications are subject to change without prior notice.

11/11 5M

H&S MANUFACTURING

2608 S. Hume Avenue
P.O. Box 768 • Telephone (715) 387-3414
FAX (715) 384-5463 • Website www.hsmfgco.com
MARSHFIELD, WI 54449



H&S WAREHOUSE 10145 Lakeshore Road
P.O. Box 1260 • Telephone (716) 736-7595
FAX (716) 736-7596 • Website www.hsmfgco.com
RIPLEY, NY 14775