

**DURABILITY AND
PERFORMANCE –
WITH AN EDGE.**

Built for full-size vehicles and larger, the **Arctic HDFVTE-P** offers the additional security of trip-edge technology. Featuring a steel cutting edge that flips back and under – or “trips” – when it encounters a fixed object with sufficient force, the **Arctic HDFVTE-P** provides extra peace-of-mind in extra-rugged terrain.

DOUBLE LIFT CHAINS
for safety



**3/8" POLYETHYLENE
MOLDBOARD**
curvature of blade throws
snow further and faster
than steel blades

GREASEABLE KINGPIN
with 1/2" x 5/8" wall bushings

**HOT-DIPPED GALVANIZED
STEEL FRAME**
provides added resistance to abrasion,
water and rust, making our plows virtually
maintenance free

**4 LASER-CUT, STEEL VERTICAL RIBS, AND 3
HORIZONTAL SUPPORTS**
on each wing, back our frictionless poly
moldboards

6" CURVED DEFLECTOR
keeps snow down on the
blade and away from the
driver's windshield

**QUIK*LINK® IV
ATTACHMENT**

**9" STROKE,
DOUBLE-ACTING
CYLINDERS**
enable a full blade
angle of 30 degrees in
"V" and scoop position


**1/2" X 6" HARDENED
STEEL CUTTING EDGE**
with top hole bolt pattern

**TOUGHER
THAN A
CANADIAN
WINTER**

WHY CHOOSE POLY?

Arctic's high density polyethylene moldboards combine the durable, slick characteristics of poly with advanced blade design mechanics to throw the stickiest, wettest snow further and faster.

Contact your Arctic Dealer to learn more about the high-tech, low-maintenance benefits of poly.

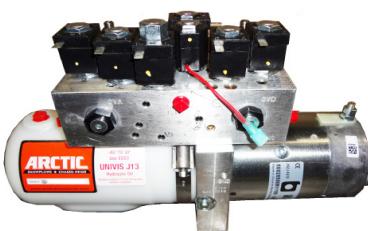

M3500V POWER UNIT

This power unit shares the same platform as all ARCTIC contractor grade blades, with a dedicated valve block. The 7 valve configuration allows for the angle cylinders to be double acting, which provides precise control at your finger tips.



QUIK*LINK® IV MOUNTING SYSTEM

Features an adjustable jackstand. Our mounting system allows you to remove the plow assembly as a single unit. ARCTIC'S QUIK*LINK IV system uses a strong loaded locking bar to disconnect both pins at once. This means everything is done from the drivers side.

Flared V Specifications

Plow Name	HDFVTE96-P	HDFVTE108-P
Blade Height	Centre 31" End 33 3/4"	Centre 31" End 34 1/2"
Complete Weight *	852LBS	897LBS
Skin Blade Material	3/8" Poly **12 ga Stainless Steel	3/8" Poly **12 ga Stainless Steel
Plow Width at Full Angle	84"	94"
Overall Length	96"	108"
Deflector	Curved (standard)	Curved (standard)
Wear Shoe	INCLUDED	INCLUDED
Cutting Edge	1/2" x 6"	1/2 x 6"
Warrenty	2 Years	2 Years

*Does not include mounting kit

** Stainless Steel Optional

QUIK*LINK® is a registered trade-mark of Arctic Equipment Manufacturing Corporation.

LEGAL DISCLAIMER: Vehicles intended to be equipped with Arctic equipment must comply with the vehicle manufacturers' specifications for equipment application.

Please consult your vehicle dealer before purchase and installation. The purchaser assumes all vehicle risk associated with the attachment and operation of Arctic equipment.

Arctic reserves the right to change specifications without prior notification.

**HANDHELD
CONTROLLER**



This controller has 9 rubber-faced, backlit buttons, with a float light in the middle. 8 second timeout protects vehicle charging system.

**JOYSTICK
CONTROLLER**



Can be mounted to the window opening or console and allows you to alter the plowing angle in the float position.

