



**Landscaping/
Estate
PRODUCTS**

Kwik Brush - PTO Broom



Get Swept away with



The **Kwik Brush** is a PTO powered broom for your small tractor. Ideal for clearing small debris from lots, leaves, and even light coats of snow the Kwik Brush turns your 20 to 40 HP tractor into a sweeping machine.

The Kwik Brush features hydraulic angling which can be controlled from the operators seat. This control allows you greater flexibility in determining where your material is being directed.

Adjustable front castor wheels let you set the appropriate down pressure for your job. The floating design keeps the Kwik Brush in contact with the contours of the terrain you are sweeping.

The integrated adjustable stands help prevent damage to the brush during storage.



- 1 Poly/Wire Bristles**
- 2 Height Adjustable Castors**
- 3 Lock Out Pins**
- 4 Hydraulic Angle Control**

Models	KWIK-55	KWIK-64	KWIK-72
Operating Weight (LBS.)	413	450	480
Depth	43	43	43
Width	26.5	26.5	26.5
Height (w/ wheels)	61"	68"	74"
Drive System	PTO Chain Drive Reduction		
Broom Angling	Hydraulic Cylinder		
Bristle Material	Replaceable Polypropylene/Wire		
Broom Bristle Dia.	21.5"	21.5"	21.5"
No. of Bristle Sec. - Zig Zag	27"	33"	36"
Oscillation	Fixed	Fixed	Fixed
Sweep Width (fully angled)	50" (24°)	58" (24°)	64" (24°)
Sweep Width (straight)	54.5"	62"	68"

Pulsar - PTO Rotary Cutter


The PTO powered Pulsar series of Rotary Cutters provide excellent mowing and shredding performance for tractors rated between 20-90 HP. The 3PH mount models are available in a variety of cutting widths providing a cutting path from 42" – 84" and a pull type model with a cutting width of 120". To better adapt to your conditions the Pulsar features an adjustable cutting height of 2"-10" and a floating top link. This combination allows you to get the ideal cut for your field or roadside.

- **cuts weeds**
- **mows grass**
- **shreds stalks**



Model	PRC42	PRC48	PRC60	PRC66
Shipping Weight (LBS.)	440	480	600	640
3PH Mount	CAT. 1 & 2 Quick Tach Compatible (42-84)			
Cutting Height	2"-10"	2"-10"	2"-10"	2"-10"
Cutting Path	42"	48"	60"	66"
Tip Speed (Ft/Min)	8,723	9,970	12,462	13,708
Wheels (Segmented)	16"	16"	16"	16"
Blades	1/2" x 3"	1/2" x 3"	1/2" x 3"	1/2" x 3"
Tractor HP (min)	20	20	30	40
PTO RPM	540	540	540	540
Gearbox Rating	40 HP	40 HP	40 HP	40 HP
Deck	10 GA.	10 GA.	10 GA.	10 GA.
Stump Jumper	YES	YES	YES	YES
Shear Pin	STANDARD/Optional Slip Clutch			STANDARD

- 1 Floating Top Link: The floating top link ties into the 3PH mount but allows the Pulsar to track level across the varying terrain.
- 2 The segmented wheel doesn't contain any air taking the worry out of flat tires (PRC42-PRC84 models only)
- 3 3 Piece Blade assembly: Free swinging end blades prevent unwanted interruption during operation.
- 4 For blade service a steel plate on the mower deck can be removed allowing for increased tool access.
- 5 Optional front & rear chain curtains on 3PH models.
- 6 Optional slip clutch for 48 & 60" cutters.

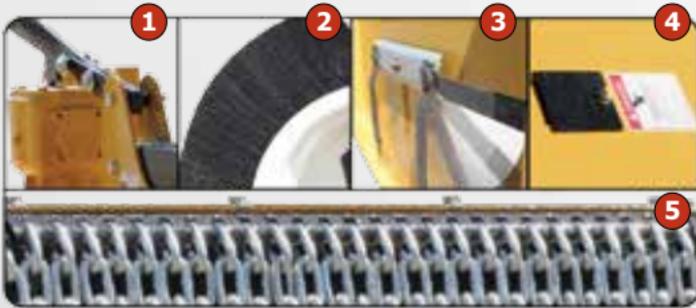

PRC66H	PRC72	PRC72H	PRC84	PRC120
675	700	740	1,080	2,300
CAT. 1 & 2 Quick Tach Compatible (42-84)				Trailed Model
2"-10"	2"-10"	2"-10"	2"-10"	2"-10"
66"	72"	72"	84"	120"
13,978	14,955	15,260	17,803	12,717
16"	16"	16"	16"	20"
1/2" x 3"	1/2" x 3"	1/2" x 3"	1/2" x 3"	1/2" x 3"
40	40	50	60	90
540	540	540	540	540
60 HP	40 HP	60 HP	60 HP	100 HP
10 GA.	10 GA.	10 GA.	9 GA.	9 GA.
YES	YES	YES	YES	YES
SLIP CLUTCH	STANDARD	SLIP CLUTCH	SLIP CLUTCH	SLIP CLUTCH

Pulsar Skidsteer Rotary Cutter

The hydraulically driven Pulsar series was designed for mowing grass and light brush, up to 1" in diameter. Available in 60" and 72" cutting widths the skidsteer mount Pulsar can cut almost any desirable height.

The heavy 3/16" material deck and deck supports provide the durability for many years of dependable service. The front of the Pulsar features a push bar that bends tall grasses and brush under the deck. Our unique drive spindle is supported by 2 bearings allowing us to couple the hydraulic motor directly onto the drive spindle, eliminating the need for a gearbox.



Flow Rates	Pack. Codes
14-17 GPM	A
18-20 GPM	B
20-22 GPM	B+
23-26 GPM	C
27-33 GPM	C+
33-40 GPM	D



Our unique float linkage allows the **Pulsar** to follow the contour of your cutting area.

To ensure optimum performance, hydraulic output must match motor package.

Model	Description	Weight (LBS.)
PRCH60	60" Rotary Cutter	760
PRCH72	72" Rotary Cutter	860

The **Pulsar Finishing Mower** is available for a wide variety of lawn mowing applications. Available in 3 rear discharge sizes there is a size to fit your mowing needs. Riding on 4 pneumatic tires the Pulsar Finishing Mower floats smoothly over your lawn. A floating top link ensures that all 4 wheels keep contact with the ground as your 3PH equipped tractor pulls it along.



Model	PFM60RD	PFM72RD	PFM84RD	PFM90RD
Cutting Width	57"	69"	81"	87"
Overall Width	64"	76"	86"	94"
Weight (LBS.)	464	547	625	714
Acres/Hr@5 MPH	3.03	3.63	4	4.57
HP Required	14/22	18/25	20/25	20/25
3PH Mount	CAT. 1	CAT. 1	CAT. 1	CAT. 1
RPM @ PTO Shaft	540	540	540	540
Number of Blades	3	3	3	3
Tip Speed (Ft/Min)	15,550	16,775	15,715	15,715
Wheels	4.10/3.50-4	4.10/3.50-4	4.10/3.50-4	4.10/3.50-4

Axis Tool Arm


The **Axis Tool Arm** has been developed to provide an economical alternative for mowing road side ditches or along side fences. Offset design allows plenty of room to clear the tractor tires, as well as keeping the tractor on a more level surface. Should you hit a solid object with the outer edge of the tool attached to the arm, we have shear bolt protection on a breakaway link. With a 55° cutting angle with the cylinder extended, and 90° cutting angle with the cylinder retracted, the operator has lots of flexibility to match whatever terrain they are working with.





Model	AXIS4	AXIS5-6
Weight (LBS.)	751	900
Offset	60"	84"
3PH Mount	CAT. 1	CAT. 1 & 2
Maximum Tool Weight (LBS.)	480	800
4' Rotary Cutter	req. min. 30 HP	
5' Rotary Cutter	req. min. 60 HP	
6' Rotary Cutter	req. min. 80 HP	
Cutting Angle Cyl. Ext.	55°	
Cutting Angle Cyl. Ret.	90°	
Tractor Remotes Req.	2	

Attaching Stabilizer Arm to Cutter


Various attachment brackets are supplied with the Axis Toolbar to attach the Stabilizer Bar to the cutter.

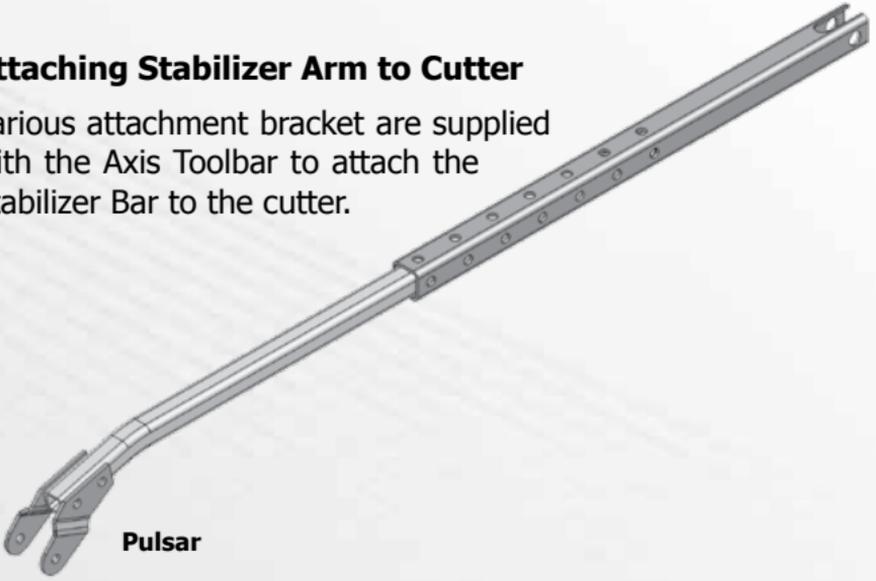


Pulsar

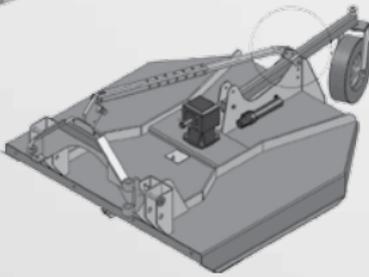

Kodiak



**Fork Rear Wheel Style
with 180° Wheel
Adjuster**



**Fork Rear Wheel
Style with Flat Wheel
Adjuster**

All four adaptors are included in the kit.

3PH Box Scraper



The **3PH Box Scraper** by MK Martin provides the small and large property owner with affordable options for grading with their line of box scrapers. Complete with steel cutting edges, height adjustable shanks, and a fully welded 3PH design these Box Scrapers really deliver.

The MK Box Scraper features two steel cutting edges. One located on the inside of the box and one on the outside. These two reversible hardened steel cutting edges allow the operator to pull or push material.

Model	Width	Weight (LBS.)	3PH Mount
448 STD	4'	320	CAT. 1
560 STD	5'	370	CAT. 1
566 HD	5'6"	415	CAT. 1
672 HD	6'	450	CAT. 1
784 HD	7'	505	CAT. 1
784 DLX	7'	570	CAT. 2
896 DLX	8'	620	CAT. 2

Standard Features



Height Adjustable

The height adjustable scarifier shanks break up the soil allowing the cutting edge to redistribute the material as the box scraper is pulled along.



Replaceable Scarifier Tips

Control how deep the scarifier rips with the Box Scrapers easy to use pin adjustment on the shanks. Removeable shanks feature replaceable scarifier tips.

Replaceable Scarifier Tips on removeable shanks.

Optional Features



Skidding Winch

Battery operated 9500 LBS. skidding winch.



Scraper Blade



The **3PH Scraper Blade** from MK Martin makes maintaining your driveway and gravel areas easy. Ruggedly built with a reversible cutting edge, these blades are designed for years of service.

The Manual Blades have five stops of angle adjustability including a full turn around. While the Hydraulic Angle blades allow you to control the blade from the comfort of your seat. With widths to match your equipment and property there is a MK Scraper blade to help keep your grades up.

Features

- 1/2" x 6" reversible cutting edge
- Full turn around with five locations forward and reverse on manual only
- 1/4" mouldboard

Model	Width	3PH Mount	Weight (LBS.)
MKGB588	5'	CAT. 1	210
MKGB688	6'	CAT. 1	232
MKGB788	7'	CAT. 1	250
MKGB798	7'	CAT. 2	492
MKGB898	8'	CAT. 2	532



This two in one combination of leveling and scraping makes short work of your grading jobs. The first blade attacks the high spots cutting them down to size, the second blade further scrapes anything the first missed and fills in the hollows. With two blades cutting and filling it takes much less time and fewer passes to achieve the even distribution of material you are looking for.

The scraper can be 3PH mounted, or equipped with a skidsteer adapter plate puts the work in front of you.



Model	Width	Weight (LBS.)
578	5'	498
678	6'	598
778	7'	697
878	8'	797

With two half inch reversible hardened cutting edges material is quickly leveled or redistributed to fill low points as the unit passes.



The next best friend your horse could have, other than you, is this easy to use Track Groomer. Use the **Track Groomer** to provide sure footing and easy on the feet riding areas.

Need to mix in some sand or any other material in your riding areas? This is the tool you've been looking for!

Work up your round pen with this easy to use, inexpensive Track Groomer. All you need is a tractor with a 3-Point Hitch. No PTO required.

Get within 2" of your walls or fences. No more shovels or built up sides in your arenas or outdoor riding pens.

Model	Size	Weight (LBS.)
TG 5	5'	200
TG 6	6'	275
TG 7	7'	300
TG 8	8'	325



Groom your track or arena surface with the MK Martin **Track-Curry**. This easy to use tool will allow you to condition the surface of your track to your desired firmness. With two rows of heavy duty S-tines to cultivate the ground, an adjustable leveling bar fastened to the rear of the S-tines and 12" rolling drum behind the leveling bar provides an accurate depth gauge to cultivate and pack your soil for optimum performance. The MK Martin Track-Curry will condition your arena/track to the footing most suited to the health and safety of your horses.

Model	TC-5	TC-6	TC-7	TC-8
Working Width	5'	6'	7'	8'
Number of Shanks	13	15	17	19
Shank Size	1-1/4" x 1/2 x 22"			
Shank Clearance	16"	16"	16"	16"
3PH Mount	CAT. 1	CAT. 1	CAT. 1	CAT. 1
HP Rating	18 - 32	22 - 39	26 - 47	30 - 53
Weight (LBS.)	460	530	640	725
Leveling Bar	1/2" x 6" (double beveled)			

Landscape Rake




Features

- CAT. 1 Quick Tach compatible
- 5/16" x 1" x 15-1/4" spring tines
- 5 forward and 3 reverse positions w/ manual adjustment

Optional Equipment

- Hydraulic Angle Kit (MKGB88ANG)
- Gauge Wheel Kit (MKLRGWK)

Model	MKLR5	MKLR6	MKLR7
Width	5'	6'	7'
MAX HP	50	50	50
Weight (LBS.)	250	263	285

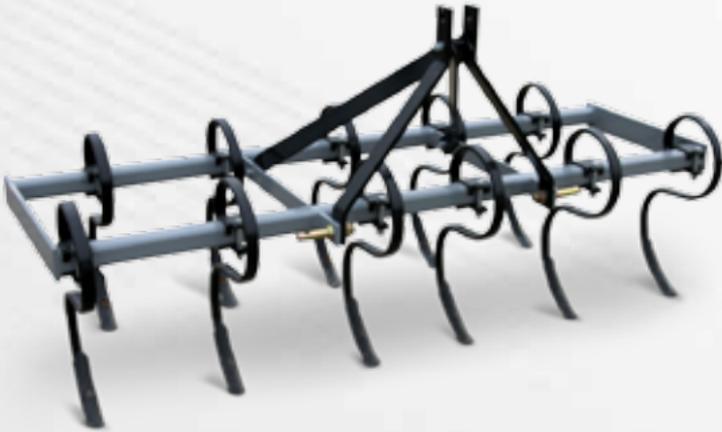

The line of economy cultivators can be used in small fields and gardens.

Model	CU-5	CU-6	CU-7
Working Width	60"	72"	84"
Overall Width	60-1/2"	72-1/2"	84-1/2"
Weight (LBS.)	164	193	222
Tines (Heat Treated)	9 tines	11 tines	13 tines
3PH Mount	CAT. 1	CAT. 1	CAT. 1

Weight Box



With a material holding volume of 3.5 cubic feet and maximum holding weight capacity of 525 LBS., this new weight box can add up to 575 LBS. of balancing weight to your CAT. 1 3PH. This added weight backs up your tractor by off setting your loader mounted attachments helping to keep your tractor safely balanced during operation.

Specifications

Hitch Type	CAT. 1
Box Volume	3-1/2 cu ft
Max Weight (box and fill) (LBS.)	575
Max Weight (fill only) (LBS.)	525

Fill Type	Weight per sq. ft. (LBS.)
Concrete	150
Gravel	110
Sand	100





This general purpose **3PH Utility Dump Box** comes in two sizes for the home owner, landscaper or wood lot owner.



- 3PH hookup CAT. 1
- Quick and easy dump
- Raise and lower to desired height for loading
- Heavy duty tubular sub frame
- 14 GA. material box structure

Model	Cap	Size	Weight (LBS.)
495	30 cu ft	18" x 48" x 48"	290
395	10 cu ft	10" x 36" x 36"	120