



# RIGID CUTTERS

Available in 3-point, semi-mount, or pull-type, these models feature a 1½" to 3" cutting capacity, depending on the model, and ¼" side skirts. With working widths ranging from 8' to 14', both 540- and 1000-rpm drive models are offered to

match a variety and range of horsepower. With many configurations available, this cutter can be customized to fit an array of conditions and needs, including improved turning radius, easier tractor attachment, and reduced initial cost.



## RIGID CUTTER MODELS


Rigid Cutters	Working Width	Transport Width	Overall Length	Engine H.P. Required	Weight	Cutting Height	Cutting Capacity
RCR2596	7' 10"	8' 4"	12' 1"	40-110	1,665	2'-12"	1.5"
RCR2510	9' 10"	10' 4"	12' 10"	50-110	2,035	2'-11"	1.5"
RCF3096	8'	8' 7"	12' 5"	40-110	1,976	2'-12"	2.5"
RCF(M)3010	10'	10' 7"	13' 1"	50-110	2,214	2'-12"	2.5"
RCF(M)3696	8'	8' 7"	12' 5"	35-130	2,090	2'-12"	3"
RCF(M)3610	10'	10' 7"	13' 1"	50-130	2,430	2'-12"	3"
RCFM4014	14'	14' 7"	10' 1"	80-250	3,350	2'-12"	3"

See [www.greatplainsag.com](http://www.greatplainsag.com) for complete specifications.

Specifications are subject to change without prior notification.

Images may not depict current or standard production models.

## Rigid Models

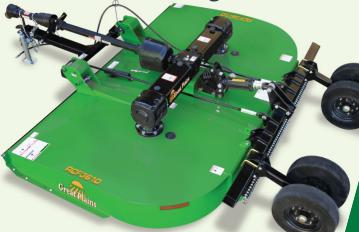

## ADDITIONAL STANDARD FEATURES

- 540-rpm\* or 1000-rpm gearbox; cast iron housing w/ beveled gears
- 1 3/4" gearbox input shaft (20 spline)
- 2" or 2-3/8"\*\* output shaft diameter
- Slip protection: 4-plate slip-clutch (540-rpm and RCFM40 models); 2-plate slip clutch (1000-rpm models)
- Rubber or spring-loaded\* flex coupler to outboard boxes
- Blade holder: 3/16" stump jumpers (2 each)
- Two 1/2" x 4" heat-treated blades per blade holder
- Free-swinging suction blades
- High blade tip speed
- Lift type: Cat 1, 2, or 3\* quick-hitch adaptable
- Pull-type is self-leveling w/ dual leveling rods
- Tongue jack is standard on pull-type models
- Tailwheels: tapered roller bearings and cast iron hub
- Spring shock absorber on axle of pull-type
- 10-gauge deck thickness
- 1/4" side skirt thickness
- LED safety lighting

\* Not available on all models

## FEATURES & BENEFITS

### MULTIPLE CONFIGURATIONS

Some variations include: 3-point w/ 16" laminated tires and driveline; pull-type w/ single wheel axle; semi-mount hitch w/ 21" laminated tires and driveline; pull-type w/ dual wheel axle; 3-point w/ 21" laminated tires; and semi-mount w/ 15" laminated tires and driveline.



### DRIVELINE CHOICES

Equal-angle shafts on pull-type models are standard. Constant-velocity (CV) U-joint drivelines are optional, but offer an improved turning radius over standard driveline models.

### 5-YEAR LTD GEARBOX WARRANTY

Choice of 540- or 1000-rpm gearbox. Although these heavy-duty gearboxes are designed for years of trouble-free use, 5-year limited warranty offers peace of mind.



### MULTIPLE GUARD CHOICES

Choose between single row chain, double row chain, or rubber deflector.

### TIRE & WHEEL OPTIONS\*

Choice of used aircraft tires, new foam-filled tires, or laminated tires.

### REVERSIBLE SKID SHOE

Skid shoes are reversible and replaceable.

## OPTIONS (see website for complete list of features & options)



HITCH OPTIONS



HYDRAULIC HEIGHT ADJUSTMENT