




LIFT ASSIST - Two standard lift assist wheels in the rear of the 3P806NT provide greater lift capacity and assist the tractor's 3-point. Straddle axle caster wheels provide maneuverability and strength.

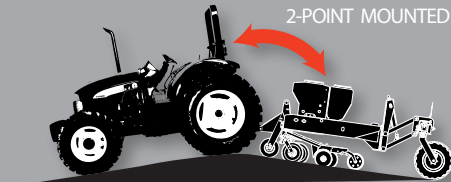

2-POINT WITH LIFT ASSIST - Allows for unmatched ground gauging in rough, rolling terrain while ensuring safe operation and transport.

The Great Plains 3P806NT and 3P1006NT are 2-Point Mounted No-Till Drills with lift assist wheels to ensure safe operation and transport. Both utilize the O6 Series Openers to properly place seed. The coulters are pre-loaded to 450 pounds to ensure proper penetration, even in the toughest conditions. The spring pre-load coulters design adds stability and improved tracking on slopes. Our double disk configuration and full length seed tube ensures that the seed is placed consistently at the chosen depth. Additional seed tubes are used to place both native grass and small seeds. This allows three different seeds to be planted at separate rates and different depths at the same time. Depth

control is handled by the 18-position T-handle press wheel adjustment.

The main seed box is a fluted feed design. The seeding rate is set with the four-speed transmission and the adjustable gate opening. The optional native grass box uses our proven "picker wheel" to meter the seed. Rates are adjusted by varying the speed of the drive. Lastly, the optional small seeds attachment is a smaller version of our fluted feed tubes, and seeding rates are set by changing the opening of the fluted feed. The ground-drive system automatically disengages when lifted, simplifying the unit and enhancing its reliability.

# Narrow Transport

MODELS 3P806NT  
3P1006NT



3 BOX 3 SEED 3 RATE  
CAPABLE

