

MODELS
AVAILABLE

MODEL INFO	5' Mounted (pg 8-9)	6' Mounted (pg 8-9)	6' Mounted (pg 10-11)	6' Pull-Type (pg 12-13)	7' Pull-Type (pg 14-15)	8' Pull-Type (pg 16-17)	8' Mounted (pg 18-19)	10' Mounted (pg 18-19)	10' Pull-Type (pg 20-21)
MODELS	3P500	3P500V	3P600	3P606NT	606NT	706NT	800	3P806NT	3P1006NT
PRIMARY DESIGN	Min-Till	Min-Till	No-Till	End Wheel No-Till	End Wheel No-Till	End Wheel Min-Till	No-Till	No-Till	End Wheel No-Till
ROW SPACINGS	6" (15.24 cm), 7.25" (18.42 cm)**, 7.5" (19.05 cm)	6" (15.24 cm), 7.5" (19.05 cm)	7.5" (19.05 cm)	7.5" (19.05 cm)	7" (17.78 cm), 7.5" (19.05 cm), 8" (20.32 cm)	6" (15.24 cm), 7.5" (19.05 cm)	7.5" (19.05 cm)	7.5" (19.05 cm)	7" (17.78 cm), 7.5" (19.05 cm), 8" (20.32 cm)
NUMBER OF OPENERS	9-6" spacing, 8-7.25**- 7-7.5" spacing	11-6" spacing, 9-7.5" spacing	9	9	11, 10, 10	15-6" spacing, 12-7.5" spacing	13	15	16, 15, 14
TIRE SIZE	5.70L x 8	5.70L x 8	5.70L x 8	7.00-15LT	9.00 x 24 8-ply	7.00-15LT 8-ply	265/70B 16.5	265/70B 16.5	9.00 x 24 8-ply
Hp REQUIREMENTS (min)	35 hp	40 hp	60 hp	40 hp	55 hp	45 hp	80 hp	100 hp	75 hp
WEIGHT (Approx.)	1200 lbs* (544 kg)	1100 lbs* (499 kg)	1500 lbs* (680 kg)	2280 lbs* (1034 kg)	2700 lbs* (1124 kg)	3900 lbs* (1769 kg)	2379 lbs* (1079 kg)	4350 lbs* (1973 kg)	5460 lbs* (2476 kg)
DIMENSIONS									
WORKING WIDTH	52.5" (133.4 cm)	67.5" (171.5 cm)	67.5" (171.5 cm)	67.5" (171.5 cm)	7' (2.13 m)	7'6" (2.28 m)	8' (2.43 m)	10' (3.05 m)	10' (3.05 m)
WIDTH (transport)	59.3" (151 cm)	58" (147.32 cm)	74.1" (188 cm)	72.5" (184.2 cm)	8'10" (2.69 m)	9'10" (3.00 m)	9'9" (2.97 m)	9'8" (2.95 m)	12'7" (3.84 m)
LENGTH (transport)	57" (145 cm)	57" (145 cm)	61" (154.9 cm)	61" (154.9 cm)	11'5" (3.48 m)	13'10" (4.22 m)	12' (3.66 m)	12'4" (3.76 m) w/ lift assist	12'4" (3.76 m) w/ lift assist
GROUND CLEARANCE	Varies by Tractor	Varies by Tractor	Varies by Tractor	Varies by Tractor	14" (35.6 cm)	13.5" (34.29 cm)	9" (22.86 cm)	Varies by Tractor	Varies by Tractor
HEIGHT (transport)	Varies by Tractor	Varies by Tractor	Varies by Tractor	Varies by Tractor	5'1" (1.55 m)	6'7" (2.0 m)	5'4" (1.63 m)	7'11" (2.41 m)	6'7" (2.0 m)
OPENER INFO									
OPENER SERIES	00 Series	00 Series	06 Series	06 Series	06 Series	00 Series	06 Series	06 Series	06 Series
OPENER TRAVEL	6.5" (16.51 cm)	6.5" (16.51 cm)	6.5" (16.51 cm)	6.5" (16.51 cm)	6.5" (16.51 cm)	8" (20.32 cm)	6.5" (16.51 cm)	6.5" (16.51 cm)	6.5" (16.51 cm)
OPENER DEPTH RANGE	0-3.5" (0-8.89 cm)	0-3.5" (0-8.89 cm)	0-3.5" (0-8.89 cm)	0-3.5" (0-8.89 cm)	0-3.5" (0-8.89 cm)	0-3.5" (0-8.89 cm)	0-3.5" (0-8.89 cm)	0-3.5" (0-8.89 cm)	0-3.5" (0-8.89 cm)
OPENER DOWN PRESSURE	90-180 lbs (40.82-81.64 kg)	90-180 lbs (40.82-81.64 kg)	90-180 lbs (40.82-81.64 kg)	90-180 lbs (40.82-81.64 kg)	90-180 lbs (40.82-81.64 kg)	90-180 lbs (40.82-81.64 kg)	90-180 lbs (40.82-81.64 kg)	90-180 lbs (40.82-81.64 kg)	90-180 lbs (40.82-81.64 kg)
COULTER	N/A	N/A	5/8" Turbo or 5/16" Fluted	5/8" Turbo or 5/16" Fluted	5/8" Turbo or 5/16" Fluted	N/A	5/8" Turbo or 5/16" Fluted	5/8" Turbo or 5/16" Fluted	5/8" Turbo or 5/16" Fluted
COULTER PRE-LOAD	N/A	N/A	450 lbs (203 kg)	450 lbs (203 kg)	450 lbs (203 kg)	N/A	450 lbs (203 kg)	450 lbs (203 kg)	450 lbs (203 kg)
CAPACITIES									
MAIN BOX CAPACITY	10 bu.	8.5 bu.	12 bu.	12 bu.	12 bu.	17.5 bu.	16 bu.	16 bu.	25 bu.
SMALL SEED BOX	1.2 bu.	N/A	1.44 bu.	1.44 bu.	1.44 bu.	1.68 bu.	2 bu.	1.92 bu.	2.4 bu.
NATIVE GRASS BOX	N/A	N/A	N/A	6 bu.	6 bu.	7 bu.	N/A	8 bu.	10 bu.
FERTILIZER	N/A	N/A	N/A	N/A	N/A	6.5 cu./ft.	8 cu./ft.	7.4 cu./ft.	9.2 cu./ft.
2ND MAIN BOX	N/A	N/A	N/A	N/A	N/A	7 bu.	N/A	8 bu.	10 bu.

*Weights based on 7 1/2" row spacing with main seed box only. Weights will vary with options. **7 1/4" spacing available on vineyard models only.

Note: All specifications subject to change without notice.

Standard Features



WIDE SEED CUPS - Exclusive Great Plains fluted feed cup delivers outstanding accuracy. Whether the seed you are drilling is small, large, or fragile, our time-proven metering system will deliver the rate you choose, evenly and gently.



WATERPROOF MANUAL HOLDER - Keeps Owner and Operator Manuals flat and in good condition. Simply lift tabs to remove.



V-BOTTOM DIVIDERS - Allow all the seed to feed from the seed box to the feeder cup so you get complete emptying. Dividers also help prevent seed from shifting in the box on sidehills.



4-SPEED GEARBOXES - Provide increased accuracy and flexibility of the metering system by giving the operator more choices for drive speed.



DIGITAL ACRE METERS - LED readout of current acres on machine. Unique design conserves battery power.



GREASE BANK - Installed on no-till machines so all coulters can be serviced from a centralized location.




SAFETY LIGHTING - Standard equipment on all but the 3P500 and 3P600 models. Provides high visibility and safety during transport.



SEED LEVEL INDICATOR - Easy to read from the tractor seat. Our floating indicator provides an accurate reading from inside the seed box.



SMALL SEEDS BOX - Smaller version of the main box fluted feed cup. It provides precise metering of small seeds like clover and alfalfa.

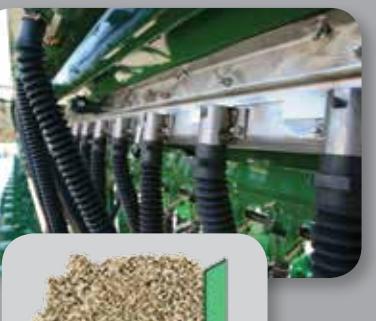

FERTILIZER BOX - Features stainless steel components for long life. Six-Point Star Meter Wheels accurately meter just the amount of fertilizer you desire.



NATIVE GRASS BOX - The Series II Native Grass Attachment features a very aggressive agitator and picker wheel to keep fluffy seeds moving through the meter. Large cups and hoses keep seed from bridging.



SECOND MAIN SEED BOX - This option gives you another wide fluted feed cup and box to deliver a second type of seed to the opener. (Not available on all models.)

*See Chart Above For Model Availability