

MODEL INFO		40' LISTER CULTIVATOR			
MODELS	TYPE	LC40-1630	LC40-1236	LC40-1238	LC40-1240
H.P. REQUIREMENTS (min)		340	275	275	275
WEIGHT (approx. range)		13,000 - 15,500 lbs.	11,000 - 13,000 lbs.	11,000 - 13,000 lbs.	11,000 - 13,000 lbs.
DIMENSIONS					
WORKING WIDTH		40'	36'	38'	40'
WIDTH (transport)		26'	24' 8"	24' 8"	26'
CLEARANCE (transport)		Depends on Tractor			
HEIGHT (transport)		14'			

Type:

LC40-1236 (12 row) 36" Rows
 LC40-1238 (12 row) 38" Rows
 LC40-1240 (12 row) 40" Rows
 LC40-1630 (16 row) 30" Rows

Model / Availability:

Spring 2013 (Limited)

Standard Equipment:

- Heavier 2-1/4" pins in upper parallel arm pivot for reduced wear.
- 3/3N or 4/4W 3-Point Hitch
- Center 7" x 7" frame with 1/2" wall; Wing frames have 3/8" wall for less flex and extended reliability.
- Wide 3-Point frame attaches to mainframe in six places, eliminating center frame flex and adding strength.
- Wing frames lock rigid with 2" pins. (optional hydraulic weight transfer for flexibility in rolling terrain)
- Heavy-duty parking stands are standard equipment.
- Laser-cut depth gauges with "positive" lock on each row unit to ensure depth settings remain constant.
- Center yokes are wider and utilize formed material for better trash clearance and added reliability.

Optional Equipment:

Option 10: Standard-length row unit
 Option 20: Extended-length row unit
 Option 30: Cultivator extended-length row unit
 Barring Off Disc Row Assembly
 Hydraulic Weight Transfer


Features & Benefits



ROW UNITS - Heavier mounts and right-angle braces are built into the backbone of each row unit, increasing strength and reliability. Unlike some competitors, our trash-flow extensions are attached from two directions, keeping the row units on track and the extensions firmly attached.



DEPTH COULTER - An open gauge wheel yoke design places the bracing where it is needed for strength but out of the way for trash flow. A steel depth gauge and positive lock ensure the depth stays where you put it.

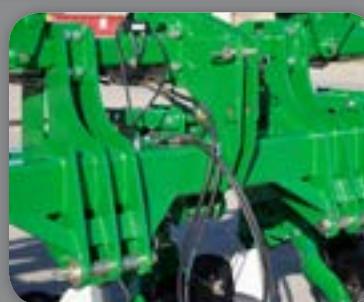

3-POINT HITCH - The 3-point lift frame extends the length of the center section, creating a fully trussed mainframe. The Lister Cultivator is available in category 3, 3N, 4, and 4W configurations.