

MODEL INFO		Short-Disk™		
Models:	SD2600	SD3000	SD3300	
Working Width:	26' 5"	29' 6"	33' 2"	
Transport Height:	13' 8"	14' 3"	14' 3"	
Transport Width:	15' 3"	15' 3"	18' 8"	
Blade Spacing:	10"	10"	10"	
Number Of Blades:	66	74	82	
PTO H.P. Requirements:	300-400	350-450	400-500	

Specifications are subject to change without prior notification.

Type:

Primary Tillage

Model / Availability:

SD2600 / Available now

SD3000 / Available now

SD3300 / May 2015 (Limited)

Standard Equipment:

- Hydraulic weight transfer
- 24" concave VEGAMATIC® blades
- Ductile cast blade / bearing mounts
- PEER® Maintenance-Free Tapered Bearings
- 6-lip bearing seal
- 7" maximum depth
- 3 x 6 gang tubes
- Fixed scrapers
- CAT III / IV cast hitch



Great Plains Ag



@GreatPlains_Ag



Great Plains Ag

Features & Benefits




CONSOLIDATION WHEELS – Create a fine finish while consolidating the ground just below the surface.



WALKING TANDEMS – Provide excellent flotation and safe, reliable road transport.



INDIVIDUAL DISC MOUNTS – Offer more space between discs for excellent trash flow and better performance in wet conditions.

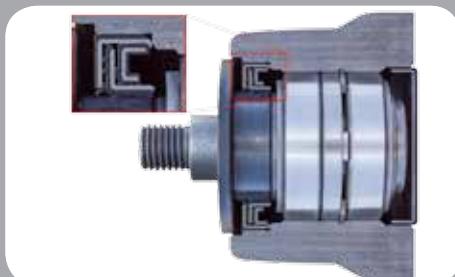

LARGE SEALED BEARINGS – Unique preloaded tapered bearings improve reliability over ball bearings.