




MODEL INFO	Turbo-Till® Series II (pg 8-9)						Turbo-Chopper® (pg 10-11)						Turbo-Max™ (pg 12-13)					Ultra-Till® (pg 14-15)				Sub-Soiler (pg 16-17)				Turbo-Chisel (pg 18-19)												
	1200TT	1500TT	1800TT	2400TT	3000TT	4000TT	1200TC	1500TC	1800TC	2400TC	3000TC	4000TC	1200TM	1500TM	1800TM	2400TM	3000TM	UT3030	UT5036	UT5042	UT5052	SS1300	SS1700	SS1800	SS2000	TCN5107	TCN5309	TCN5311	TCN5313	TC5109	TC5111	TC5113	TC5115	TC5313				
MODELS																																						
SHANK SPACING	5" (2 offset gangs at 10" spacing per gang)						10"						3.75" (2 offset gangs at 7.5" spacing per gang)					8"				N/A				*24", 30", 36", 38", 40"												
COULTER SPACING	5" (2 offset gangs at 10" spacing per gang)						10"						3.75" (2 offset gangs at 7.5" spacing per gang)					8"				N/A				7.5", 7.5", 7.5", 7.5", 7.5", 7.5", 7.5", 7.5", 7.5", 7.5", 7.5"												
TIRES	11Lx15 F-ply						11Lx15 F-ply						11Lx15 F-ply					(4)11Lx15 F-ply				20.5x8 10-ply				(4)12.5Lx15 12-ply												
WEIGHT (approx. lbs.)	**10,000						**12,200						**14,400					**19,100				12,000				7,300												
PTO H.P. REQ (min)	115+						145+						165+					285+				50 per shank				30 per shank												
DIMENSIONS																																						
TILLAGE WIDTH	12'						15'						18'					24'				30'				16'				8' 9"								
WIDTH (transport)	12' 3"						15' 6"						17' 6"					14'				11' 8"				14-19' 5"				9'								
HEIGHT (transport)	N/A						8' 9"						10' 3"					5' 4"				12' 8"				N/A				5' 9"								
TILLAGE INFO																																						
CENTER SECTION	12'						15'						8'					10'				10'				N/A				9'								
1ST WING SECTION	N/A						5'						6' 9"					10'				9' 6"				N/A				N/A								
2ND WING SECTION	N/A						N/A						N/A					N/A				N/A				N/A				N/A								



MODEL INFO	Turbo-Chisel (pg 18-19) continued					MODEL INFO	8000 Series Disc-O-Vator (pg 22-23)												Disk Harrow (pg 24-25)						8000 Series Field Cultivator (pg 26-27)											
	TC5315	TC5317	TC5319	TC5321	TC5323		MODELS	8315DVN	8318DVN	8321DVN	8324DVN	8321DV	8324DV	8326DV	8328DV	8333DV	8537DV	8544DV	8548DV	8552DV	3323DH	3326DH	3329DH	4330DH	4333DH	4336DH	8323FC	8328FC	8332FC	8336FC	8539FC	8544FC	8548FC	8551FC	8556FC	8560FC
MODELS																																				
SHANK SPACING	15"						24												9 ^{66,7,5} 78						N/A											
COULTER SPACING	7.5"						27												N/A						39											
TIRES	(6)12.5Lx15 F-ply						12.5Lx16.5 G-ply												11Lx15 F-ply						(4)11Lx15 F-ply											
WEIGHT (approx. lbs.)	12,900						6,650												12,000						N/A											
PTO H.P. REQ (min)	25 to 30 hp per shank						115-135												375+						120-175											
DIMENSIONS																																				
TILLAGE WIDTH	18' 9"						15' 9"												23' 1"						23'											
WIDTH (transport)	14' 6"						9' 10"												13' 10"						14'											
HEIGHT (transport)	10' 3"						8' 6"												11'						10'											
TILLAGE INFO																																				
CENTER SECTION	10'						8'												9' 6"						10'											
1ST WING SECTION	4' 9"						3.5'												6' 1"						6' 6"											
2ND WING SECTION	N/A						N/A												N/A						N/A											

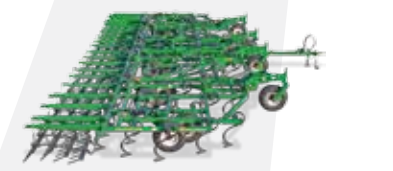

MODEL INFO	Seedbed Conditioner (pg 28-29)															Plains Plow (pg 30-31)										Flex Harrow (pg 32-33)							
	2112	2115	2317	2320	2322	2325	2327	2330	2332	2335	2536	2538	2541	2543	2546	2551	9322PP	9326PP	9533PP	9540PP	9744PP	9748PP	9752PP	9756PP	6424HD	6630HD	6636HD	6642HD	6845HD	6848HD	6851HD		
MODELS																																	
NUMBER OF BLADES	N/A															6										N/A							
NUMBER OF SHANKS	N/A															6										N/A							
TIRES	9.5Lx15 8-ply															11Lx15 8-ply										12.5Lx15 12-ply							
WEIGHT (approx. lbs)	1,701															8,160										N/A							
PTO H.P. REQ (min)	N/A															150-205										5 hp per foot							
DIMENSIONS																																	
TILLAGE WIDTH	12' 6"															22' 4"										24'							
WIDTH (transport)	14' 3"															13'										12' 8"							
HEIGHT (transport)	N/A															12' 6"										10' 10"							
TILLAGE INFO																																	
CENTER SECTION	12'															7' 6"										12'							
1ST WING SECTION	N/A															8'										6'							
2ND WING SECTION	N/A															N/A										N/A							
3RD WING SECTION	N/A															N/A										N/A							



Note: All specifications subject to change without notice.
*24-inch spacing available on even number of shank models only.
^ Models Available Fall 2012
**Approximate maximum weights with attachments.