

# 9000 SERIES

110-120 HORSEPOWER

## DELUXE POWERHOUSE

The 9000 series is built for those who want nothing less than the best. Engineered with a singular focus: to create an ultimate tractor experience that maximizes efficiency, comfort, line of sight, quality of construction, ergonomic convenience, low cab sound levels, ease of servicing, maneuverability, and much more. All of these deluxe features are housed within one of the toughest, strongest, and most durable tractors on the market. Don't settle for less than Mahindra.



## THE SUPERHERO OF UTILITY TRACTORS

### DELUXE CAB ›

All 9000 series models come standard with a deluxe cab equipped with air-conditioning and heater, a spacious and comfortable interior, front window wiper, flat ergonomic operator platform, USB charging port, and much more.

### COMFORT ›

Standard mComfort Air Ride seat with adjustable armrests and headrest reduces operator fatigue and increases productivity.

### 3-POINT AND HYDRAULICS ›

With best-in-class lift capacity (at 9,460 lbs.) and best-in-class hydraulic flow (21.2 GPM), you'll experience the power that your implements are truly capable of.

### LOADER LIFT CAPACITY ›

There isn't much in the world that a 9000 series tractor can't lift. With best-in-class lift capacity (5,415 lbs. up to full height) and best-in-class lift height (162"), you'll have the power to lift your productivity to higher levels.

### ENGINE ›

All 9000 series models come standard with Mahindra's own industry-leading common rail diesel technology (mCRD), offering minimal oil and fuel consumption, high strength steel connecting rods, and a less complex design.

### TRANSMISSION ›


Choose between 32F/32R or 12F/12R Power Shuttle transmissions, both allowing for the widest speed range in class, providing excellent directional control for heavy-duty loader work.

Ideal Uses: Agriculture | Hay | Material Handling | Specialty / Hobby Farming  
Grounds Maintenance / Municipal | Rural Lifestyle | Livestock | Dairy

## KEY ADVANTAGES



### 9125 S CAB

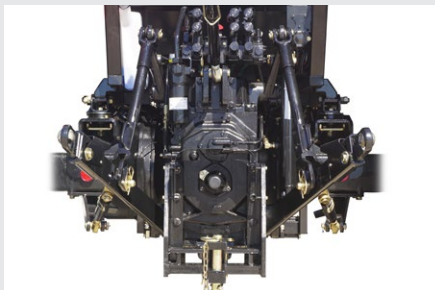

#### BEST-IN-CLASS HYDRAULIC POWER

9000 series tractors come standard with best-in-class hydraulic flow, control valve, and 2 or 3 hydraulic remote outlets for maximal implement productivity.



#### DELUXE CAB

Cab comes standard with heater and air conditioning, convenient levers and controls, radio with Bluetooth, LED front and rear work lights, roof glass for a clear view of raised front loader, phone holder and charger, and more.



#### REAR FENDER 3-POINT CONTROLS

Get your work done quicker and more efficiently with the simpler hooking and unhooking of rear 3-point mounted implements.



# 9000 SERIES



## LIFT MORE IN THE FRONT

With a lift capacity of up to 5,415 lbs at 162" high with the 9125CL front loader, the 9000 series possesses the highest loader lift capacity in its class.



## AIR SUSPENSION SEAT

9000 series tractors come standard with the mComfort Air Ride seat, featuring adjustable armrests and headrest, to reduce operator fatigue and increase productivity.



## EASY MAINTENANCE

The one-piece tilting hood allows for easy access to common service items. Simply unlock via a pulled lever. Servicing your vehicle has never been simpler.

## 9000 SERIES ATTACHMENTS

TRACTOR	9110 S CAB	9110 P CAB	9125 S CAB	9125 P CAB
<b>LOADER MODEL</b>			<b>9125CL</b>	
Standard Bucket Size [in]			87	
Maximum Lift Height [in]			162	
Dig Depth [in]			6.1	
Lift Capacity to Full Height at Pivot Pin [lbs]			5415	
Breakout Force [lbs]			6874	
Shipping Weight [lbs]			2450	



## 9000 SERIES SPECIFICATIONS

TRACTOR	9110 S CAB	9110 P CAB	9125 S CAB	9125 P CAB
<b>ENGINE</b>				
Type	Four-stroke, Turbocharged, Direct Injection, Water Cooled Diesel Engine			
Engine HP (kW) @ RPM	110 (82) @ 2300		120 (89.52) @ 2300	
Displacement [in <sup>3</sup> (cc)]	215.4 (3529)			
Number of Cylinders	4			
Bore & Stroke [in]	Bore: 3.78, Stroke: 4.8			
Fuel Tank [gal (L)]	44.9 (170)			
<b>DRIVE TRAIN</b>				
Transmission	Full Synchro Mesh with Forward / Reverse Power Shuttle & Constant Mesh Range			
Number of Speeds	12F / 12R	24F / 24R + 8 Creepers	12F / 12R	24F / 24R + 8 Creepers
Clutch	Wet Clutch			
Brakes	Hydraulic Wet disc			
<b>PTO</b>				
Type	3-speed Independent Single Lever PTO	2-speed Independent Single Lever PTO	3-speed Independent Single Lever PTO	2-speed Independent Single Lever PTO
Rear PTO RPM	540/540E/1000	540/1000	540/540E/1000	540/1000
PTO HP (kW)	93.5 (69.7)		106 (79.1)	
<b>HYDRAULICS</b>				
Type	Open center with Position & Draft Control			
Implement Pump Output [gpm (L/min)]	21.2 (80.25)			
Maximum Total Flow [gpm (L/min)]	30.6 (116)			
3-Point Hitch	CAT II w/ Telescoping Stabilizers, & Flex Links			
Lift Capacity [lb (kg)]	7480 (3392)	9460 (4290)	7480 (3392)	9460 (4290)
<b>ELECTRICAL</b>				
Battery	12 V, 110 Ah 1000 CCA			
Alternator	12 V, 110 A			
<b>DIMENSIONS</b>				
Overall Length [in (mm)]	173.2 (4400)			
Overall Width [in (mm)]	89.1 (2262)		91.3 (2319)	
Overall Height [in (mm)]	115.4 (2930)		116.5 (2960)	
Wheelbase [in (mm)]	100.4 (2550)			
Minimum Ground Clearance [in (mm)]	18.9 (480)		20.1 (510)	
Turning Radius [ft (m)]	13 (3.98)			
Weight [lb (kg)]	9385 (4256)		9535 (4325)	
<b>WHEELS &amp; TIRES</b>				
AG [Front/Rear]	13.6R24 / 16.9R38 Radial		14.9R24 / 18.4R38 Radial	