


TRAILED TRACK SYSTEM

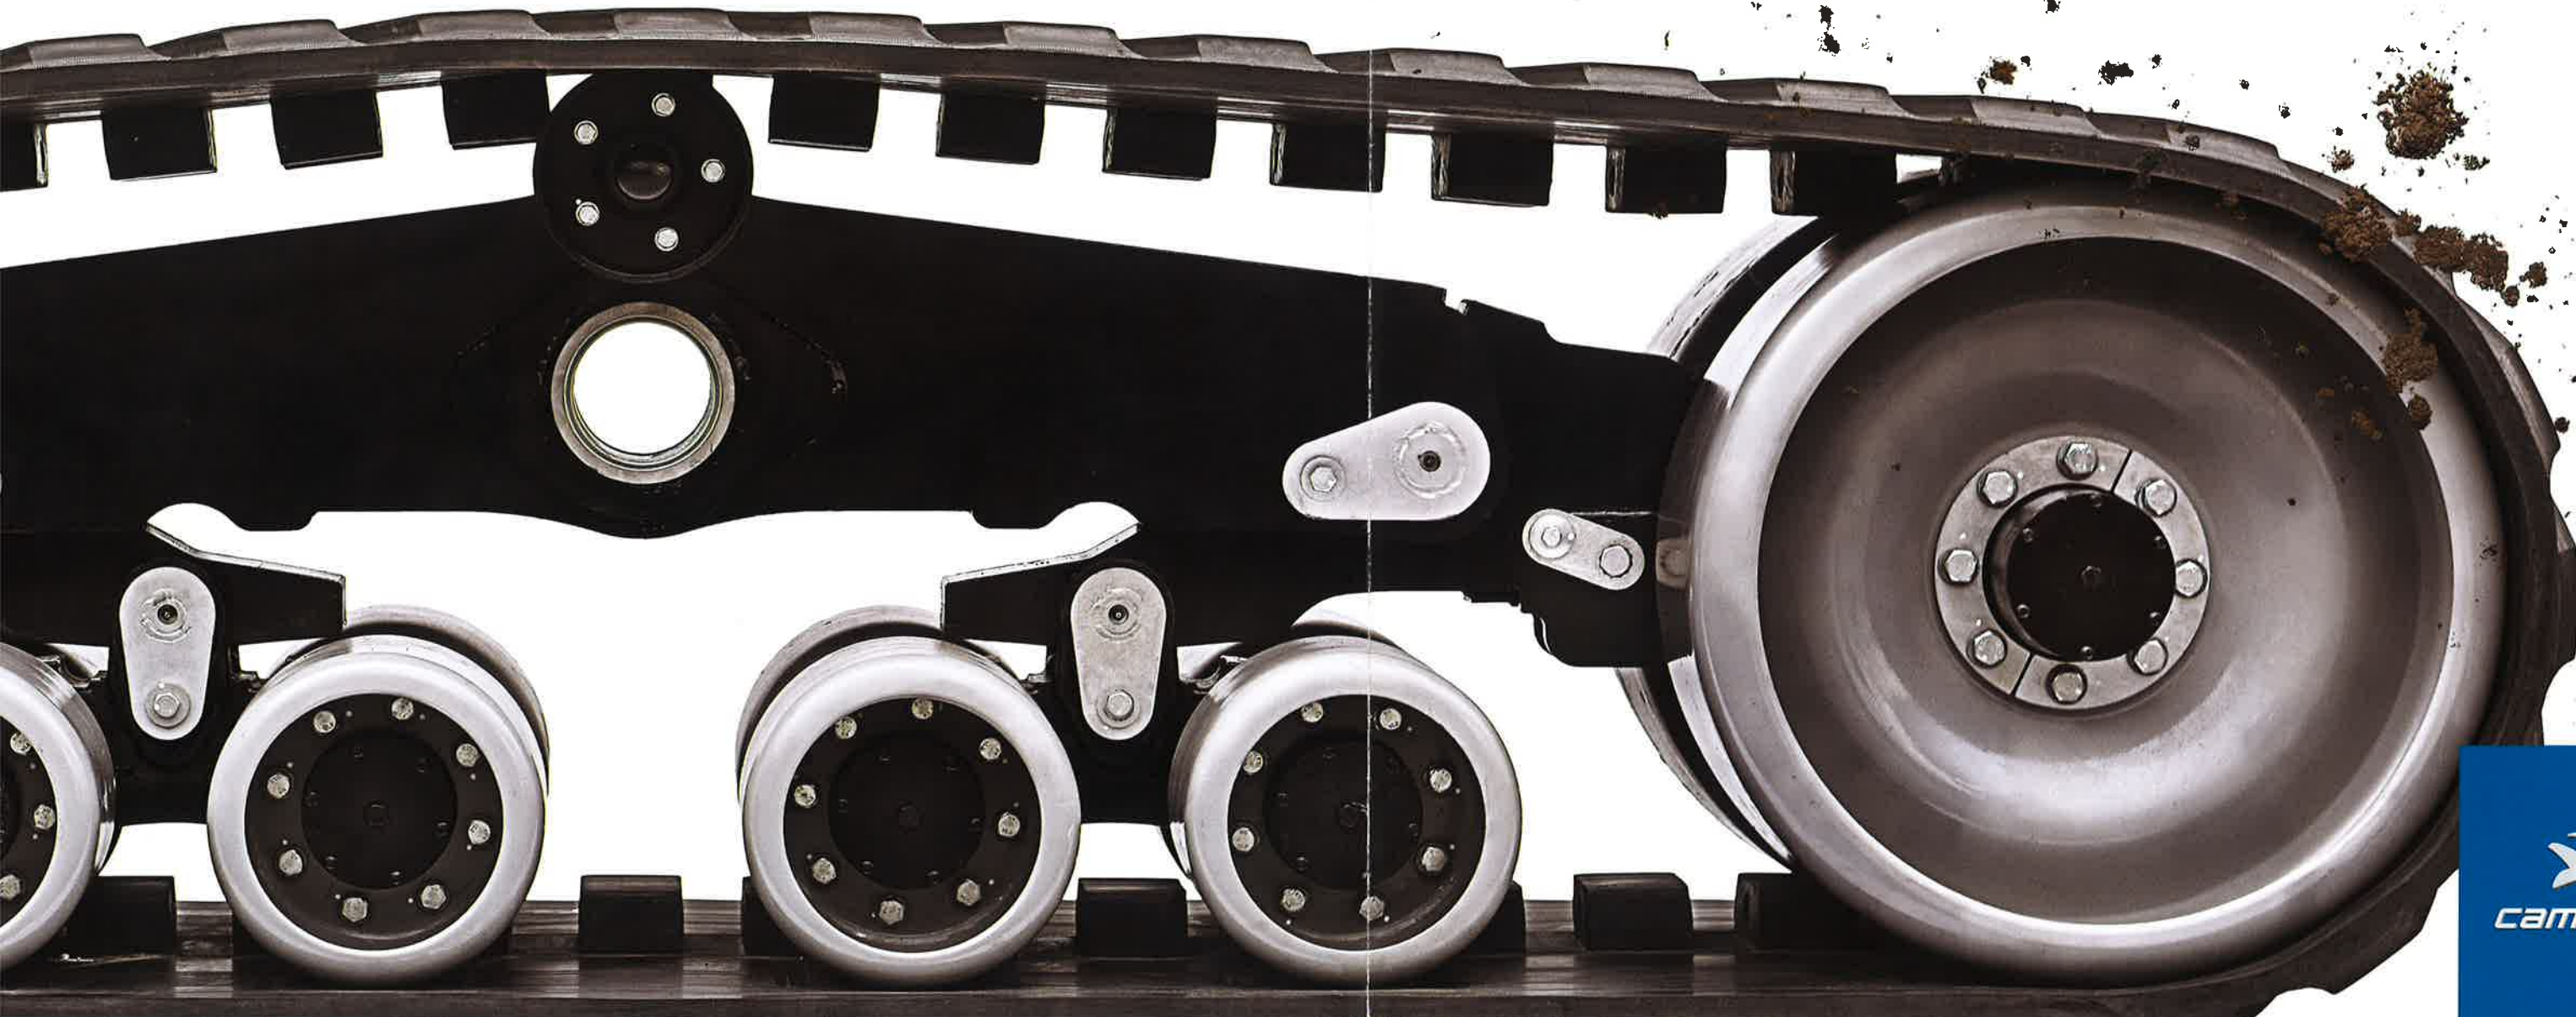

TRAILED TRACK SYSTEM BENEFITS

Completely redesigned and exclusive Camoplast technology

Better performance

Improved reliability and durability

Reduced maintenance

Available for planters, harvest carts, fertilizer carts, and sprayers



30/40 SERIES



40/70 SERIES



80/100 SERIES

We support every step of your farming operation, from field prep to planting to harvesting, delivering efficiency and maximum yields.

Because like you, we are out there in the field every day.



SUSPENSION SYSTEM

- Patented double oscillating bogie wheels
- Maintains greater ground contact and support on uneven terrain
- Improves cart stability and product placement



ALIGNMENT SYSTEM

- Swing link design with push/pull adjusters and positive locking feature
- Simplifies the alignment process to support long track life



TRACKS

- Designed exclusively for trailed applications
- Lowers rolling resistance for ease of pulling
- Reduces ridging or berming at the headlands
- Long wear life rubber compounds



MAIN FRAMES

- Strong, rigid frame design for increased durability



WHEELS

- Stamped, steel wheel construction for increased strength
- Heavy duty wheel hubs with oil bath lubrication
- Reduced maintenance — no greasing or repacking of bearings



TENSION SYSTEM

- Mechanical spring track tensioner actively maintains tension
- Ensures proper operation of the system without any additional adjustments or maintenance

HARVEST CARTS

Trailed track system benefits

- 50 – 85% ground pressure reduction versus tires
- 70 series offers shorter wheelbase compatible with wheeled tractors
- 30" and 36" track widths available



| TTS Models | Track Width (in.) | Overall Height (in.) | Overall Length (in.) | Ground Contact - Per Pair (in. ²) | Capacity - Per Pair (lbs) |
|------------|-------------------|----------------------|----------------------|---|---------------------------|
| 70-3611 | 36.0 | 36.1 | 103.5 | 4853 | 70,000 |
| 80-3013 | 30.0 | 40.3 | 136.2 | 6006 | 80,000 |
| 100-3613 | 36.0 | 40.3 | 136.2 | 7207 | 100,000 |
| 100-3612 | 36.0 | 40.3 | 147.4 | 8014 | 100,000 |

FERTILIZER CARTS

Trailed track system benefits

- More than 60% ground pressure reduction versus tires
- Narrow track widths available for row crop applications
- 30" and 36" track widths for large capacity applications
- Improves cart stability and product placement



| TTS Models | Track Width (in.) | Overall Height (in.) | Overall Length (in.) | Ground Contact - Per Pair (in. ²) | Capacity - Per Pair (lbs) |
|------------|-------------------|----------------------|----------------------|---|---------------------------|
| 30-1611 | 16.5 | 31.0 | 83.1 | 1719 | 30,000 |
| 45-1814 | 18.0 | 36.1 | 103.5 | 2426 | 45,000 |
| 100-3613 | 36.0 | 40.3 | 136.2 | 7207 | 100,000 |
| 100-3612 | 36.0 | 40.3 | 147.4 | 8014 | 100,000 |

PLANTERS, STRIP TILL, SEED CARTS

Trailed track system benefits

- 40 - 60% ground pressure reduction versus tires
- Reduces planting compaction zones
- Short wheelbases reduce berming on the headlands
- Increases mobility in soft footing conditions



| TTS Models | Track Width (in.) | Overall Height (in.) | Overall Length (in.) | Ground Contact - Per Pair (in. ²) | Capacity - Per Pair (lbs) |
|------------|-------------------|----------------------|----------------------|---|---------------------------|
| 30-1611 | 16.5 | 31.0 | 83.1 | 1719 | 30,000 |
| 30-1612 | 16.5 | 30.5 | 72.7 | 1383 | 30,000 |
| 35-1813 | 18.0 | 30.5 | 72.7 | 1508 | 35,000 |
| 35-2011 | 20.0 | 30.5 | 72.7 | 1676 | 35,000 |
| 35-2211 | 22.0 | 30.5 | 72.7 | 1844 | 35,000 |
| 35-2511 | 25.0 | 30.5 | 72.7 | 2095 | 35,000 |
| 45-1814 | 18.0 | 36.1 | 103.5 | 2426 | 45,000 |
| 40-2512 | 25.0 | 31.0 | 83.1 | 2605 | 40,000 |
| 70-2516 | 25.0 | 36.1 | 103.5 | 3370 | 70,000 |
| 70-3011 | 30.0 | 36.1 | 103.5 | 4044 | 70,000 |
| 70-3611 | 36.0 | 36.1 | 103.5 | 4853 | 70,000 |

SPRAYERS

Trailed track system benefits

- More than 70% ground pressure reduction versus tires
- 16.5" and 18" track widths available
- Improves cart stability and product placement



| TTS Models | Track Width (in.) | Overall Height (in.) | Overall Length (in.) | Ground Contact - Per Pair (in. ²) | Capacity - Per Pair (lbs) |
|------------|-------------------|----------------------|----------------------|---|---------------------------|
| 30-1611 | 16.5 | 31.0 | 83.1 | 1719 | 30,000 |
| 45-1814 | 18.0 | 36.1 | 103.5 | 2426 | 45,000 |



In today's economy, good business means making your money go a long way. That is why we are committed to: Design and manufacture the most durable and reliable products available - Offer our high-performance products at affordable prices - Provide a full product line-up to optimize your productivity - Maximize product availability to reduce downtime - Give the best technical support and service in the industry
camoplastsolideal.com