

Primary Tillage

4000 FLEX-WING CHISEL PLOW



www.KuhnNorthAmerica.com



Invest in Quality®



INCREASE YOUR PRODUCTIVITY

The KUHN Krause 4000 Flex-Wing Chisel Plow allows farmers to complete their primary tillage faster and more efficiently by matching widths with tractor horsepower.

Well designed shank spacing allows for uniform residue flow even in high residue conditions.

Choose the KUHN Krause 4000 Flex-Wing Chisel for money savings now and better root systems later.

4000 FLEX-WING CHISEL PLOW in brief

Models	Working Width	Number of Shanks
4000-17	17'	17
4000-19	19'	19
4000-21	21'	21
4000-23	23'	23
4000-25N	25'	25
4000-27N	27'	27
4000-25W	25'	25
4000-27W	27'	27
4000-29	29'	29
4000-31	31'	31
4000-33	33'	33
4000-35	35'	35
4000-37N	37'	37
4000-39N	39'	39

POSITIVE MECHANICAL DEPTH CONTROL

Standard on all KUHN Krause 4000 Flex-Wing Chisel Plows to ensure even operating depth across the width of the machine.



SHANKS

RIGID

- Low-cost reliability
- Non-rock conditions

SPRING RESET

- 600 lb. point load
- 9" trip height



SHEAR-BOLT

- Shear-bolt protected
- Retains shank after shear-bolt trip



POINTS

2" Reversible Straight Point

- Excellent soil penetration
- Cuts compaction

3" Twisted Shovel

- Good soil penetration
- Residue mixing action



ADDITIONAL FEATURES



WALKING BEAMS

- Maintain level operation in rough conditions
- Distributes frame weight



WING GAUGE WHEEL


Optional 31' to 35' / Standard 37' to 39'

- Ratchet-jack adjustable
- Provides additional stability



OPTIONAL HARROW ATTACHMENTS

- 3-Row spike harrow
- 5-Row spike harrow

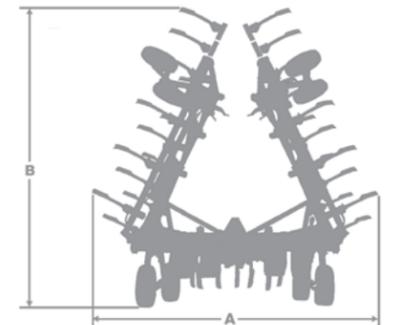

4000-17 to 4000-27N


Model Specifications	MODELS	4000-17	4000-19	4000-21	4000-23	4000-25N	4000-27N
DIMENSIONS							
A Transport Width ¹		12'9" / 3.9 m	12'9" / 3.9 m	12'9" / 3.9 m	12'9" / 3.9 m	12'9" / 3.9 m	12'9" / 3.9 m
B Transport Height ¹		9'8" / 2.9 m	10'7" / 3.2 m	11'9" / 3.6 m	12'6" / 3.8 m	13'6" / 4.1 m	14'8" / 4.5 m
SPECIFICATIONS							
Frame Type		3-Section	3-Section	3-Section	3-Section	3-Section	3-Section
Number of Shanks		17	19	21	23	25	27
Shank Spacing		12" / 30.5 cm					
Working Width ³		17' / 5.2 m	19' / 5.8 m	21' / 6.4 m	23' / 7.0 m	25' / 7.6 m	27' / 8.2 m
Approximate Weight ²		5,452 lbs / 2,473 kg	5,600 lbs / 2,540 kg	5,714 lbs / 2,592 kg	6,299 lbs / 2,857 kg	6,447 lbs / 2,924 kg	6,650 lbs / 3,016 kg
Standard Equipment							
- Hitch Clevis		Ductile Clevis Type for 1-3/8" Pin					
- Positive Mechanical Depth Control Each Section		Center Section: Two 4" x 8" Cylinders Wing Section: One 3-3/4" x 8" Cylinder					
- Hydraulics		Royal Plate Plus® Cylinder Rods, Color Coded Hose Grips, Male ISO Couplers on Hydraulic Hoses					
- Wing Fold		Two 4-1/2" x 16" Cylinders					
- Safety		Tongue Jack, Slow Moving Vehicle Sign, High Visibility LED Transport Light Kit, Safety Chain					
Tires/Wheels							
- Center Section		Four 9.5L x 15" 8-ply, Walking Beams, 6-Bolt Heavy-Duty Hubs					
- Wing Section		One 11L x 15" 8-ply, Single per Wing					
Shanks							
Rigid Clamp Shanks		10" Maximum Working Depth, 30" Underframe Clearance, 1-1/4" x 2" x 30" Shanks on 12" Spacing (less points)					
OPTIONAL EQUIPMENT							
Shanks and Points							
- Shear-Bolt		12" Maximum Working Depth, 32" Underframe Clearance 1-1/4" x 2-1/2" x 32" Parabolic Shank					
- Spring Cushioned		600 lb Point Load, 12" Maximum Working Depth, 9" Trip Height, 32" Underframe Clearance, 1-1/4" x 2" x 26" Parabolic Shank					
- Points		2" Reversible, 3" Twisted					
Wing Wheels		Two 9.5L x 15" 8-ply, Walking Beams, 6-Bolt Heavy-Duty Hubs					
Harrow		3-Row Spike Harrow or 5-Row Spike Harrow					
Rear Hitch		Standard Rear Hitch for Use without Harrow Attachment, Extended Rear Hitch for Use with Harrow Attachment					
OPERATING INFORMATION							
Recommended Operating Speed		4 - 7 mph / 6 - 12 km/h					
Recommended Working Depth		6" - 12" / 15.2 cm - 30.4 cm					
Recommended Tractor Power Range ⁴		7 - 10 PTO HP per Foot / 5 - 8 kw/hp					

¹ Approximate transport width, height and weight shown without optional finishing attachments

² Approximate weight provided for models equipped with spring reset shanks.

³ RTK working width

⁴ Estimates only. Horsepower requirements will vary by geography and soil type.

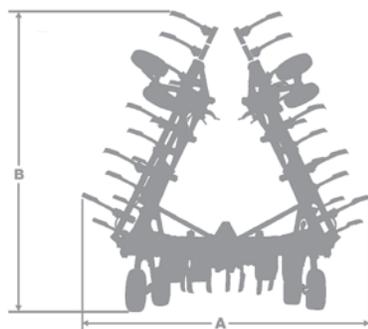

4000-25W to 4000-39

Model Specifications	4000-25W	4000-27W	4000-29	4000-31	4000-33	4000-35	4000-37	4000-39
DIMENSIONS								
A Transport Width ¹	18'4" / 5.6 m	18'4" / 5.6 m	18'4" / 5.6 m	18'4" / 5.6 m	18'4" / 5.6 m	18'4" / 5.6 m	18'4" / 5.6 m	18'4" / 5.6 m
B Transport Height ¹	10'10" / 3.3 m	11'9" / 3.6 m	12'9" / 3.9 m	13'7" / 4.1 m	14'6" / 4.4 m	15'6" / 4.7 m	16'4" / 5.0 m	17'3" / 5.3 m
SPECIFICATIONS								
Frame Type	3-Section	3-Section	3-Section	3-Section	3-Section	3-Section	3-Section	3-Section
Number of Shanks	25	27	29	31	33	35	37	39
Shank Spacing	12" / 30.5 cm							
Working Width ³	25' / 7.6 m	27' / 8.2 m	29' / 8.8 m	31' / 9.4 m	33' / 10.1 m	35' / 10.7 m	37' / 11.3 m	39' / 11.9 m
Approximate Weight ²	7,456 lbs / 3,382 kg	7,604 lbs / 3,449 kg	7,817 lbs / 3,546 kg	8,611 lbs / 3,906 kg	8,759 lbs / 3,973 kg	8,972 lbs / 4,070 kg	10,040 lbs / 4,554 kg	10,188 lbs / 4,621 kg
Standard Equipment								
- Hitch Clevis	Ductile Clevis Type for 2" Pin							
- Positive Mechanical Depth Control Each Section	Center Section: Two 4-1/4" x 8" Cylinders Wing Section: One 3-3/4" x 8" Cylinder							
- Hydraulics	Royal Plate Plus® Cylinder Rods, Color-Coded Hose Grips, Male ISO Couplers on Hydraulic Hoses							
- Wing Fold	Two 4-1/2" x 40" Cylinders							
- Safety	Tongue Jack, Slow Moving Vehicle Sign, High Visibility LED Transport Light Kit, Safety Chain							
Tires/Wheels								
- Center Section	Four 11L x 15" FI, Walking Beams, 6-Bolt Heavy-Duty Hubs							
- Wing Section	One 11L x 15" 8-ply, Single per Wing	Two 9.5L x 15" 8-ply, Walking Beams per Wing, 6-Bolt Heavy-Duty Hubs					Two 9.5L x 15" 8-ply, Walking Beams per Wing, 6-Bolt Heavy-Duty Hubs,	
Gauge Wheels	N/A				OPT		One 9.5L x 15" per Wing, 6-Bolt Heavy-Duty Hubs	
Shanks								
Rigid Clamp Shanks	10" Maximum Working Depth, 30" Underframe Clearance, 1-1/4" x 2" x 30" Shanks							
OPTIONAL EQUIPMENT								
Shanks and Points								
- Shear-Bolt	12" Maximum Working Depth, 32" Underframe Clearance 1-1/4" x 2-1/2" x 32" Parabolic Shank							
- Spring Cushioned	600 lb Point Load, 12" Maximum Working Depth, 9" Trip Height, 32" Underframe Clearance, 1-1/4" x 2" x 26" Parabolic Shank							
- Points	2" Reversible, 3" Twisted							
Wing Wheels	Two 9.5L x 15" 8-ply, Walking Beams 6-Bolt Heavy-Duty Hubs				STD			
Harrow	3-Row Spike Harrow or 5-Row Spike Harrow							
Rear Hitch	Rear Hitch Assembly For Use Without Harrow Attachments, Extended Rear Hitch Assembly For Use With Harrow Attachments							
Gauge Wheels	N/A				9.5L x 15" 8-ply Gauge Wheel per Wing		STD	
OPERATING INFORMATION								
Recommended Operating Speed	4 - 7 mph / 6 - 12 km/h							
Recommended Working Depth	6" - 12" / 15.2 cm - 30.4 cm							
Recommended Tractor Power Range ⁴	7 - 10 PTO Horsepower per Foot/ 5 - 8 kW							

¹ Approximate transport width, height and weight shown without optional finishing attachments

² Approximate weight provided for models equipped with rigid clamp shanks.

³ RTK working width

⁴ Estimates only. Horsepower requirements will vary by geography and soil type.

For more information about your nearest KUH N Krause dealer and other KUH N Krause products, visit our website

www.KuhnNorthAmerica.com



Visit our YouTube channel to watch our latest product videos.



www.KuhnNorthAmerica.com

Your KUH N Krause dealer

KUH N KRAUSE, INC.

305 South Monroe Street
P.O. Box 2707
Hutchinson, KS 67504

Information given in this document is only for informational purposes and is non-contractual. Our machines are in compliance with North American safety standards. In our literature, and for improved illustration of certain details, some safety devices may not be in operating position. When operating these machines, these devices must be operated in accordance with the requirements indicated in the operator's manuals and assembly manuals. We reserve the right to change any designs, specifications or materials listed without further notice. Machines and equipment in this document can be covered by at least one patent and/or registered design. Trademarks cited in this document may be registered in one or several countries.

Find us on

