


**WOODS**

*New*

# 20-FT. **BATWING**<sup>®</sup> ROTARY CUTTERS

**Models BW20.50, BW20.60 and BW20.70  
for tractors 70 – 300 HP**

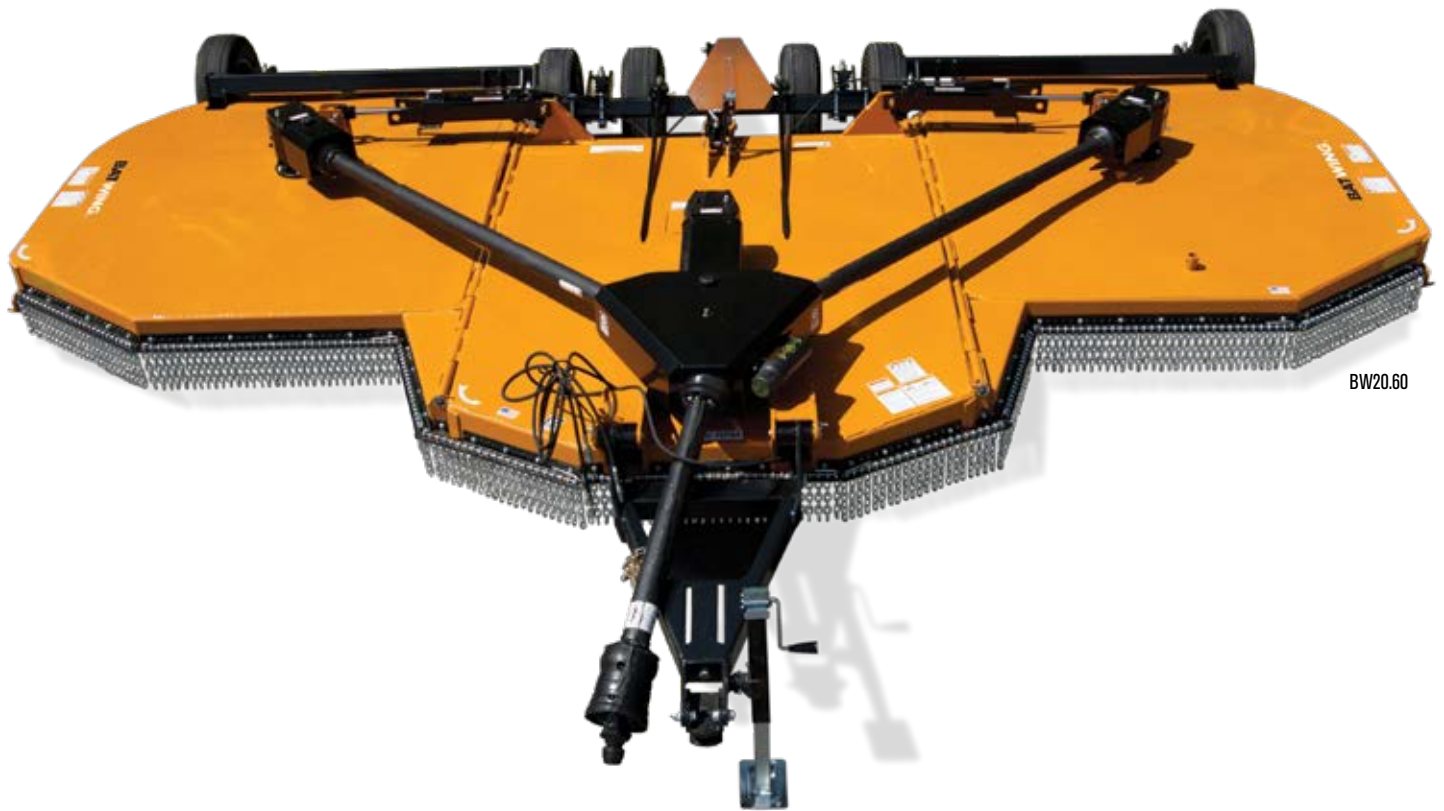

**Classic profile and new features make the Woods 20-foot Batwing<sup>®</sup> rotary cutter your best choice for clearing fields and pastures, shredding crops, mowing airports and country estates, cutting overgrown waterways, and maintaining roadsides.**



**SUPERIOR DESIGN ■ SUPERIOR DURABILITY ■ SUPERIOR STYLE**

**The new 20-foot wide Batwing flex-wing cutter combines our well-known, classic Batwing profile and smooth, sloped deck with new features that deliver the superior design, durability, and style you expect from Woods.**



BW20.50



BW13.70



BW20.70

- High-strength bolts and improved design have increased wheel yoke strength and durability
- Woods' exclusive greasable Quick-Change blade system allows easier blade changes from the top of the deck
- Extra heavy, double layer deck on the BW20.70 tames the most rugged environments
- Fully baffled, 13-inch deep deck handles more material, distributes evenly, and reduces the likelihood of blade to deck contact
- Hinged metal gearbox shields open easily for maintenance
- Greasable pivot points on the turnbuckle and axle arms increase durability and product life
- Strong, spring arm suspension absorbs the impact from uneven terrain, saving wear and tear
- Woods' unique baffling design creates a suction that lifts and moves material so it is cut and recut in one pass. This produces a finer shred and distributes material more evenly than other flex-wings on the market.

SPECIFICATIONS	BW13.70 (single-wing model)	BW20.50	BW20.60	BW20.70
Tractor PTO Horsepower	70-300	70-200	70-300	
Hitch	self-leveling clevis	pivoting clevis	self-leveling clevis	
Cutting Height (inches)	2 - 15			
Cutting Capacity Diameter (inches)	4	2	3	4
Cutting Width (inches)	162	240		
Blade Tip Speed	15,450 fpm at 540 rpm; 16,650 fpm at 1,000 rpm	15,450 fpm at 540 rpm; 16,300 fpm at 1,000 rpm		15,450 fpm at 540 rpm; 16,650 fpm at 1,000 rpm
Weight (lbs)	8,500	6,510	6,600	7,740
Deck Thickness (inches)	.135 upper and lower	0.135		.135 upper and lower
Side Frame Thickness (inches)	0.25			
Side Frame Depth (inches)	12.5	13.25		12.5
Hinge Rod Diameter (inches)	1" full length			
Transport Width (inches)	100	123		
Wing Flex (degrees)	90 up, 22 down			
Driveline Rating	CAT 6 CV			
Splitter/Wing Gearbox Rating (hp)	250 / 210	250 / 120	250 / 205	250 / 210
Output Shaft Diameter (inches)	2.38	2	2.38	
Tongue Weight (lbs)	2,870	2,400		2,700
Wheel Options	21" laminated, 24" new Ag, 29" used aircraft, 15" rimless tires			
Gearbox Warranty Limited	6 years	6 years	6 years	6 years
Options	double row chain shielding; tandem spring arm suspension; pintel ring hitch; deck rings	double row chain shielding; tandem spring arm suspension; pintel ring hitch; spring-loaded wing lock-ups for narrow (118") transport width	double row chain shielding; tandem spring arm suspension; pintel ring hitch; shredding kit; spring-loaded wing lock-ups for narrow (118") transport width	double row chain shielding; tandem spring arm suspension; pintel ring hitch; shredding kit; deck rings; spring-loaded wing lock-ups for narrow (118") transport width

**WOODS** | A Blount International Brand  
 2606 South Illinois Route 2, Oregon, Illinois 61061  
 tel 800-319-6637 woodsequipment.com



Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2019 Woods Equipment Company. All rights reserved. WOODS and Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.