

STANDARD EQUIPMENT

ISO Standard cabin

All-weather steel cab with 360° visibility
Safety glass windows
Rise-up type windshield wiper
Sliding fold-in front window
Sliding side window(LH)
Lockable door
Hot & cool box
Storage compartment & Ashtray
Radio & USB player
Handsfree mobile phone system with USB
Transparent cabin roof-cover
12 volt power outlet (24V DC to 12V DC converter)
Sun visor

Cabin ROPS(ISO 12117-2)

ROPS(Roll over protective structure)

Computer aided power optimization (New CAPO) system

3-power mode, 2-work mode, User mode
Auto deceleration & one-touch deceleration system
Auto warm-up system
Auto overheat prevention system

Automatic climate control

Air conditioner & heater
Defroster

Self-diagnostics system

Starting Aid (air grid heater) for cold weather

Centralized monitoring

LCD display
Engine speed or Trip meter/Accel.
Clock
Gauges
Fuel level gauge
Engine coolant temperature gauge
Hyd. oil temperature gauge
Warnings
Check engine
Overload
Communication error
Low battery
Air cleaner clogging
Indicators
Max power
Low speed/High speed
Fuel warmer
Auto idle

Door and cab locks, one key

Three outside rearview mirrors

Mechanical suspension seat with heater

Pilot-operated slidable joystick

Console box height adjust system

Four front working lights

Electric horn

Batteries (2 x 12V x 100 AH)

Battery master switch

Removable clean-out dust net for cooler

Automatic swing brake

Removable reservoir tank

Fuel pre-filter with fuel warmer

Boom holding system

Arm holding system

Track shoes (600mm, 24")

Track rail guard

Accumulator for lowering work equipment

Electric transducer

Lower frame under cover (Normal)

Viscous fan clutch

OPTIONAL EQUIPMENT

Fuel filler pump (50 L/min)

Beacon lamp

Safety lock valve for boom cylinder with overload warning device

Safety lock valve for arm cylinder

Single-acting piping kit (breaker, etc.)

Double-acting piping kit (clamshell, etc.)

Quick coupler

Travel alarm

Boom

5.68 m, 18' 8"

Arms

2.00 m, 6' 7"

2.40 m, 7' 10"

2.92 m, 9' 7"

Cabin lights

Cabin front window rain guard

Track shoes

700mm, 28"

800mm, 32"

900mm, 36"

Lower frame under cover (Additional)

Long crawler lower frame

Long crawler & Front dozer lower frame

Tool kit

Rearview camera

Pattern change valve (2 patterns)

Hi-mate (Remote Management System)

Cabin FOPS/FOG (ISO/DIS 10262)-Level II

FOPS (Falling Object Protective Structure)

FOG (Falling Object Guard)

* Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to International standards.

* The photos may include attachments and optional equipment that are not available in your area.

* Materials and specifications are subject to change without advance notice.

* All imperial measurements rounded off to the nearest pound or inch.

PLEASE CONTACT



6100 Atlantic Blvd, Norcross, GA 30071

TEL (678) 823-7777 FAX (678) 823-7778

Robex

235LCR-9A

With Tier 4 Interim Engine installed

MOVING YOU FURTHER

HYUNDAI HEAVY INDUSTRIES



*Photo may include optional equipment



HYUNDAI
CONSTRUCTION EQUIPMENT AMERICAS, INC.

PRIDE AT WORK

Hyundai Heavy Industries strives to build state-of-the-art earthmoving equipment to give every operator maximum performance, more precision, versatile machine preferences, and proven quality.

Take pride in your work with Hyundai!



Robex 235LCR-9A

Machine Walk-Around

Engine Technology

Proven, reliable, fuel efficient, low emission and low noise
Cummins Tier 4 interim & EU stage III B engine

Hydraulic System Improvements

New patented hydraulic control for improved controllability / Improved control valve design for added efficiency and smoother operation / New auto boom and swing priority system for optimum speed / New auto power boost feature for additional power when needed / Improved arm-in and boom-down flow regeneration system for added speed and efficiency

Pump Compartment

Industry-leading, powerful, reliable Kawasaki designed, variable volume in-line axial piston pumps
New compact solenoid block equipped with 4 solenoid valves, 1 EPPR valve, 1 check valve accumulator and pilot filter - controls 2 speed travel, power boost, boom priority, safety lock, arm regeneration

Enhanced Operator Cab

Improved Visibility

Enlarged cab with improved visibility / See-through upper skylight for visibility and ventilation
Larger right-side glass, now one piece, for better right visibility
Safety glass windows on all sides - less expensive than (polycarbonate) and won't scratch or fade
Closeable sunshade for operator convenience / Reduced front window seam for improved operator view

Improved Cab Construction

New steel tube construction for added operator safety, protection and durability
New window open/close mechanism designed with cable and spring lift assist and single latch release

Improved Suspension Seat / Console Assembly

Ergonomic joysticks with auxiliary control buttons for attachment use. Now with new sleek styling
Heated suspension (standard)

Advanced 7" Color Cluster with Touch Screen

New Color LCD Display with easy to read digital gauges for hydraulic oil temperature, water temperature, and fuel. Simplified design makes adjustment and diagnostics easier. Also, new enhanced features such as rear-view camera are integrated into monitor.

3 power modes : (P) Power, (S) Standard, (E) Economy, 2 work modes : Dig & Attachment, (U) User mode for operator preference

Enhanced self-diagnostic features with GPS download capability

One pump flow or two pump flow for optional attachment is now selectable through the cluster / New anti-theft system with password capability

Boom speed and arm regeneration are selectable through the monitor.

Auto power boost is now available - selectable (on/off) through the monitor.

Powerful air conditioning and heat with auto climate control

RMS (Remote Management System) works through GPS/satellite technology to ultimately provide better customer service and support.

Undercarriage

Sealed track chain (urethane seals) / Standard track rail guard / Comfortable bolt-on steps

Large upper roller cut-outs for debris clean-out / Tapered side frames for debris clean-out / Grease-type track tensioner

*Photo may include optional equipment.

PRECISION

Innovative hydraulic system technologies make the 9A series excavator fast, smooth and easy to control.



*Photo may include optional equipment.

Computer Aided Power

The engine horsepower and hydraulic horsepower together in unison through the advanced CAPO(Computer Aided Power Optimization) system, flow for the job at hand. Operator can set their own preferences for boom or swing priority, power mode selection and optional work tools at the touch of a button.

The CAPO system also provides complete self diagnostic features and digital gauges for important information like hydraulic oil temperature, water temperatures and fuel level. This system interfaces with multiple sensors placed throughout the hydraulic system as well as the electronically controlled engine to provide the optimum level of engine power and hydraulic flow.

Power Mode

P (Power Max) mode maximizes machine speed and power for mass production. S (Standard) mode provides a reduced, fixed rpm for optimum performance and improved fuel economy. For maximum fuel savings and improved control, E (Economy) mode provides precise flow and engine power based on load demand. Three unique power modes provide the operator with custom power, speed and fuel economy.

Work Mode

The work mode allows the operator to select single flow attachments like a hydraulic breaker or bi-directional flow attachments like a crusher. Flow settings unique to each attachment can be programmed from within the cluster.

User Mode

Some jobs require more precise machine settings. Using the versatile U (User) mode, the operator can customize engine speed, pump output, idle speed and other machine settings for the job at hand.

Improved Hydraulic System



To achieve optimum precision, Hyundai redesigned the hydraulic system to provide the operator with super fine touch and improved controllability. Improved pump flow control reduces flow when controls are not being used to minimize fuel consumption.

Improved spool valves in the control valve are engineered to provide more precise flow to each function with less effort.

Improved hydraulic valves, precision-designed variable volume piston pumps, fine-touch pilot controls, and enhanced travel functions make any operator running a

9A series look like a smooth operator. Newly improved features include arm-in and boom-down flow regeneration, improved control valve technology and innovative auto boom and swing priority for optimal performance in any application.



Auto Boom-swing Priority

This smart function automatically and continuously looks the ideal hydraulic flow balance for the boom and swing motions of the machine. The advanced CAPO system monitors the hydraulic system and adjusts its settings to maximize performance and productivity.

PERFORMANCE


9A series is designed for maximum performance to keep the operator working productively.



*Photo may include optional equipment.

Track Rail Guard & Adjusters

Durable track rail guards keep track links in place. Track adjustment is made easy with standard grease cylinder track adjusters and shock absorbing springs.

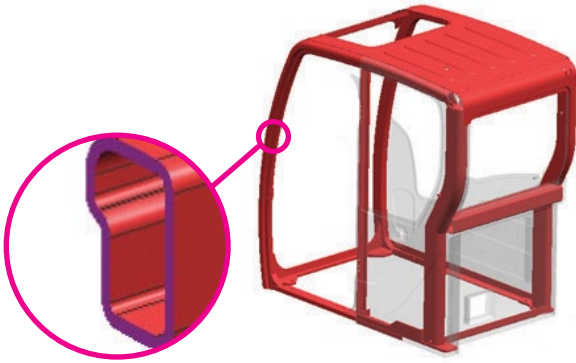

Structure Strength

The 9A series cabin structure has been fitted with stronger but slimmer tubing for more safety and improved visibility. Low-stress, high strength steel is integrally welded to form a stronger, more durable upper and lower frame. Structural integrity was tested by way of FEM (Finite Elements Method) analysis and long-term durability tests. The ROPS(Roll Over Protective Structure) cab can be equipped to enhance operator safety.

Eco-friendly Cummins QSB 6.7 Engine

The CUMMINS QSB6.7 engine combines advanced electronic controls and a self-diagnostic system with reliable performance. The combination of a high pressure common rail system and an advanced in-cylinder combustion technology results in increased power, improved transient response and reduced fuel consumption. The QSB6.7 Cummins engine complies with current emissions standards including EPA Tier4 Interim and EU Stage III-B.

The Definition of Progress

The Quantum System B Series 6.7-liter engine combines full authority electronic controls with the reliable performance. The electronics with the QSB6.7 have been proven with our high-horse power products-working in the harshest, most demanding environments-search as dusty, non-stop mining operations while meeting emissions regulations worldwide.

The QSB6.7 features 24 valve designed with centered injectors and symmetrical piston bowl. The combination of improved air flow and evenly dispersed fuel results in increased power, improved transient reponse and reduced fuel consumption.



PREFERENCE

Operating a 9A series is unique to every operator. Operators can fully customize their work environment and operating preferences to fit their individual needs.



*Photo may include optional equipment.



Wide Cabin with Excellent Visibility

The newly designed cabin was conceived for more space, a wider field of view and operator comfort. Special attention was given to a clear, open and convenient interior with plenty of visibility on the machine surroundings and the job at hand. This well balanced combination of precision aspects put the operator in the perfect position to work safely and securely.

Operator Comfort

In the 9A series cabin you can easily adjust the seat, console and armrest settings to best suit your personal operating preferences. Seat and console position can be set together and independent from each other. Additional creature comforts include the fully automatic high-capacity airconditioning system and the radio / USB player.



Reduced Stress

Work is stressful enough. Your work environment should be stress free. Hyundai's 9A series provides improved cab amenities, additional space and a comfortable seat to minimize stress to the operator. A powerful climate control system provides the operator with optimum air temperature. An advanced audio system with USB player, AM/FM stereo and MP3 capabilities, plus remotely located controls is perfect for listening to music favorites. Operators can even talk on the phone with the hands-free cell phone feature. Also, the newly designed optional remote control offers mobile bluetooth-handsfree and radio cable-handsfree function.



Smart Key System (Option)

9A series excavators provide smart key system as an option. This allows the operator to start the engine by the push of a starter button without inserting a key in the ignition.



Operator - Friendly Cluster

The advanced new cluster with 7 inch wide color LCD with touch screen and toggle switch allows the operator to select his personal machine preferences. Power and work mode selection, self diagnostics, optional rear-view camera, maintenance check lists, start-up machine security, and video functions were integrated into the cluster to make the machine more versatile and the operator more productive.

The newly applied FM transmitter application transmits signal to USB & Radio player with the same frequency as cluster. The player outputs the audio through the internal speaker in the cab. The video & firmware updates are possible with USB host support and an adjustable cluster hinge bracket improves cluster visibility.

Monitor Tilt Range



Horizontal
Total : 15°



Vertical
Total : 30°



PROFITABILITY

9A series is designed to maximize profitability through improved efficiencies, enhanced service features and longer life components.



*Photo may include optional equipment.


Fuel Efficiency

9A series excavators are engineered to be extremely fuel efficient. New innovations like two-stage auto decel system and the new economy mode help to conserve fuel and reduce the impact on the environment.



Hi-mate (Remote Management System)

Hi-mate, Hyundai's proprietary remote management system, provides operators and dealer service personnel access to vital service and diagnostic information on the machine from any computer with internet access. Users can pinpoint machine location using digital mapping and set machine work boundaries, reducing the need for multiple service calls. Hi-mate saves time and money for the owner and dealer by promoting preventative maintenance and reducing machine downtime.

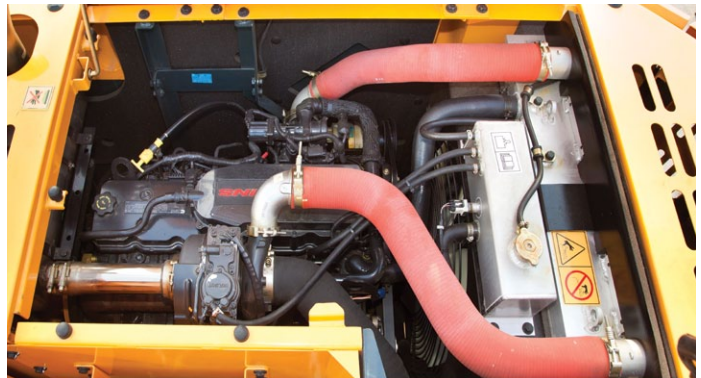

Easy Access

Ground-line access to filters, lube fittings, fuses, machine computer components and wide open compartments makes service more convenient on the 9A series.



Long-Life Components

9A series excavators were designed with bushings designed for long-life lube intervals (250 hrs) & polymer shims (wear resistant, noise reducing), long-life hydraulic filters (1,000hrs), long-life hydraulic oil (5,000hrs), more efficient cooling systems and integrated preheating systems which extend service intervals, minimize operating costs and reduce machine down time.

Specifications

ENGINE

| | | | |
|----------------------------|-----|--|--------------------------|
| MODEL | | CUMMINS QSB6.7 Engine | |
| Type | | Water cooled, 4 cycle Diesel, 6-cylinders in line, direct injection, turbocharged charger and air cooled | |
| Rated flywheel horse power | SAE | J1995 (gross) | 167HP (124kW)/ 1,950 rpm |
| | | J1349 (net) | 157HP (117kW)/ 1,950 rpm |
| | DIN | 6271/1 (gross) | 169PS (124kW)/ 1,950 rpm |
| | | 6271/1 (net) | 159PS (117kW)/ 1,950 rpm |
| Max. torque | | 74.7kgf-m (540lb-ft)/1,500rpm | |
| Bore X stroke | | 107mm X 124mm (4.2" X 4.9") | |
| Piston displacement | | 6,700cc (409 in ³) | |
| Batteries | | 2 X 12V X 100AH | |
| Starting motor | | 24V, 4.8kW | |
| Alternator | | 24V, 95Amp | |

HYDRAULIC SYSTEM

| | |
|--|--|
| MAIN PUMP | |
| Type | Variable displacement tandem axis piston pumps |
| Rated flow | 2 X 228.2 L/min (60.3 US gpm/50.2 UK gpm) |
| Sub-pump for pilot circuit | Gear pump |
| Cross-sensing and fuel saving pump system. | |

| | |
|------------------|--|
| HYDRAULIC MOTORS | |
| Travel | Two speed axial pistons motor with brake valve and parking brake |
| Swing | Axial piston motor with automatic brake |

| | |
|---------------------------------|-------------------------------------|
| RELIEF VALVE SETTING | |
| Implement circuits | 350 kgf/cm ² (4,980 psi) |
| Travel | 350 kgf/cm ² (4,980 psi) |
| Power boost (boom, arm, bucket) | 380 kgf/cm ² (5,410 psi) |
| Swing circuit | 285 kgf/cm ² (4,050 psi) |
| Pilot circuit | 40 kgf/cm ² (570 psi) |
| Service valve | Installed |

| | |
|-------------------------------|---|
| HYDRAULIC CYLINDERS | |
| No. of cylinder bore X stroke | Boom: 2-120 X 1,290 mm (4.7" X 50.8") |
| | Arm: 1-140 X 1,510 mm (5.5" X 59.4") |
| | Bucket: 1-120 X 1,055 mm (4.7" X 41.5") |

DRIVES & BRAKES

| | |
|---------------------------------|---|
| Drive method | Fully hydrostatic type |
| Drive motor | Axial piston motor, in-shoe design |
| Reduction system | Planetary reduction gear |
| Max. drawbar pull | 21,400 kgf (47,180 lbf) |
| Max. travel speed(high) / (low) | 5.8 km/hr (3.6mph) / 3.4 km/hr (2.1mph) |
| Gradeability | 30° (58 %) |
| Parking brake | Multi wet disc |

CONTROL

Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.

| | |
|------------------------|---|
| Pilot control | Two joysticks with one safety lever (LH): Swing and arm, (RH): Boom and bucket(ISO) |
| Traveling and steering | Two levers with pedals |
| Engine throttle | Electric, Dial type |

SWING SYSTEM

| | |
|---------------------------|---------------------------------------|
| Swing motor | Fixed displacement axial piston motor |
| Swing reduction | Planetary gear reduction |
| Swing bearing lubrication | Grease-bathed |
| Swing brake | Multi wet disc |
| Swing speed | 10.7 rpm |

COOLANT & LUBRICANT CAPACITY

| Refilling | liter | US gal | UK gal |
|----------------------------------|-------|--------|--------|
| Fuel tank | 320 | 84.5 | 70.4 |
| Engine coolant | 38 | 10 | 8.4 |
| Engine oil | 23.7 | 6.3 | 5.2 |
| Swing device-gear oil | 6.2 | 1.6 | 1.4 |
| Final drive(each)-gear oil | 6 | 1.6 | 1.3 |
| Hydraulic system(including tank) | 275 | 72.6 | 60.5 |
| Hydraulic tank | 160 | 42.3 | 35.2 |

UNDERCARRIAGE

The X-leg type center frame is integrally welded with reinforced box-section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing springs and sprockets, and a track chain with double or triple grouser shoes.

| | |
|------------------------------------|---------------------|
| Center frame | X - leg type |
| Track frame | Pentagonal box type |
| No. of shoes on each side | 49 EA |
| No. of carrier roller on each side | 2 EA |
| No. of track roller on each side | 9 EA |
| No. of rail guard on each side | 2 EA |

OPERATING WEIGHT (APPROXIMATE)

Operating weight, including 5,680mm (18' 8") boom, 2,920mm (9' 7") arm, SAE heaped 0.80m³ (1.05 yd³) bucket, lubricant, coolant, full fuel tank, full hydraulic tank, and all standard equipments.

| | |
|---------------------------|----------------------|
| MAJOR COMPONENT WEIGHT | |
| Upperstructure | 5,600 kg (12,350 lb) |
| Boom(with arm cylinder) | 1,950 kg (4,300 lb) |
| Arm(with bucket cylinder) | 1,095 kg (2,410 lb) |

| | | | |
|------------------|--------------|------------------|---------------------------|
| OPERATING WEIGHT | | | |
| Shoes | | Operating weight | Ground pressure |
| Type | Width mm(in) | kg(lb) | kgf/cm ² (psi) |
| Triple grouser | 600 (24") | 23,800 (52,470) | 0.51 (7.25) |
| | 700 (28") | 24,060 (53,040) | 0.44 (6.26) |
| | 800 (32") | 24,320 (53,620) | 0.39 (5.55) |
| | 900 (36") | 24,580 (54,190) | 0.35 (4.98) |

BUCKETS

All buckets are welded with high-strength steel.



SAE
heaped
m³ (yd³)


0.51 (0.67)



0.80 (1.05)
0.87 (1.14)
0.92 (1.20)



1.10 (1.44)
1.20 (1.57)




1.34 (1.75)



* 0.74 (0.97)
* 0.90 (1.18)
* 1.05 (1.37)



● 0.87 (1.14)



■ 0.75 (0.98)

| Capacity m ³ (yd ³) | | Width mm (in) | | Weight kg (lb) | Recommendation mm (ft-in) | | |
|---|----------------|-------------------------|----------------------|-------------------|---------------------------|--------------------|-------------------|
| SAE heaped | CECE heaped | Without side cutters | With side cutters | | 5,680 (18' 8") Boom | | |
| | | | | 2,000 (6' 7") Arm | | 2,400 (7' 10") Arm | 2,920 (9' 7") Arm |
| 0.51 (0.67) | 0.45 (0.59) | 700 (27.6) | 820 (32.3) | 570 (1,260) | ● | ● | ● |
| 0.80 (1.05) | 0.70 (0.92) | 1,000 (39.4) | 1,120 (44.1) | 700 (1,540) | ● | ● | ● |
| 0.87 (1.14) | 0.75 (0.98) | 1,090 (42.9) | 1,210 (47.6) | 740 (1,630) | ● | ● | ■ |
| 0.92 (1.20) | 0.80 (1.05) | 1,150 (45.3) | 1,270 (50.0) | 770 (1,700) | ● | ● | ■ |
| 1.10 (1.44) | 0.96 (1.26) | 1,320 (52.0) | 1,440 (56.7) | 830 (1,830) | ● | ■ | ▲ |
| 1.20 (1.57) | 1.00 (1.31) | 1,400 (55.1) | 1,520 (59.8) | 850 (1,870) | ■ | ▲ | - |
| 1.34 (1.75) | 1.15 (1.50) | 1,550 (61.0) | 1,670 (65.7) | 920 (2,030) | ▲ | ▲ | - |
| * 0.74 (0.97) | 0.65 (0.85) | 985 (38.8) | - | 770 (1,700) | ● | ● | ● |
| * 0.90 (1.18) | 0.80 (1.05) | 1,070 (42.1) | - | 810 (1,790) | ● | ● | ■ |
| * 1.05 (1.37) | 0.92 (1.20) | 1,290 (50.8) | - | 890 (1,960) | ● | ■ | ▲ |
| ● 0.87 (1.14) | 0.75 (0.98) | 1,140 (44.9) | - | 900 (1,980) | ● | ● | ■ |
| ■ 0.75 (0.98) | 0.65 (0.85) | 1,790 (70.5) | - | 880 (1,940) | ● | ● | ■ |

* Heavy duty bucket

■ Slope finishing bucket

● Rock-Heavy duty bucket

●: Applicable for materials with density of 2,000 kg/m³ (3,370 lb/ yd³) or less

■: Applicable for materials with density of 1,600 kg/m³ (2,700 lb/ yd³) or less

▲: Applicable for materials with density of 1,100 kg/m³ (1,850 lb/ yd³) or less

ATTACHMENT

Booms and arms are welded with a low-stress, full-box section design. 5.68m Boom and 2.0m, 2.4m, 2.92m Arms are available.

DIGGING FORCE


| Boom | Length | mm (ft-in) | 5,680 (18' 8") | | | Remarks |
|----------------------------|--------|------------|----------------|----------------|---------------|------------------------|
| | Weight | kg (lb) | 1,950 (4,300) | | | |
| Arm | Length | mm (ft-in) | 2,000 (6' 7") | 2,400 (7' 10") | 2,920 (9' 7") | []: Power Boost |
| | Weight | kg (lb) | 975 (2,150) | 1,045 (2,300) | 1,095 (2,410) | |
| Bucket digging force | SAE | kN | 133.4 [144.8] | 133.4 [144.8] | 133.4 [144.8] | |
| | | kgf | 13600 [14770] | 13600 [14770] | 13600 [14770] | |
| | | lbf | 29980 [32550] | 29980 [32550] | 29980 [32550] | |
| | ISO | kN | 152.0 [165.0] | 152.0 [165.0] | 152.0 [165.0] | |
| | | kgf | 15500 [16830] | 15500 [16830] | 15500 [16830] | |
| | | lbf | 34170 [37100] | 34170 [37100] | 34170 [37100] | |
| Arm crowd force | SAE | kN | 144.2 [156.5] | 119.6 [129.9] | 102.0 [110.7] | |
| | | kgf | 14700 [15960] | 12200 [13250] | 10400 [11290] | |
| | | lbf | 32410 [35190] | 26900 [29210] | 22930 [24900] | |
| | ISO | kN | 151.0 [164.0] | 125.5 [136.3] | 106.9 [116.1] | |
| | | kgf | 15400 [16720] | 12800 [13900] | 10900 [11830] | |
| | | lbf | 33950 [36860] | 28220 [30640] | 24030 [26090] | |

Note: Boom weight includes arm cylinder, piping, and pin

Arm weight includes bucket cylinder, linkage, and pin

Dimensions & Working Range

R235LCR-9A DIMENSIONS

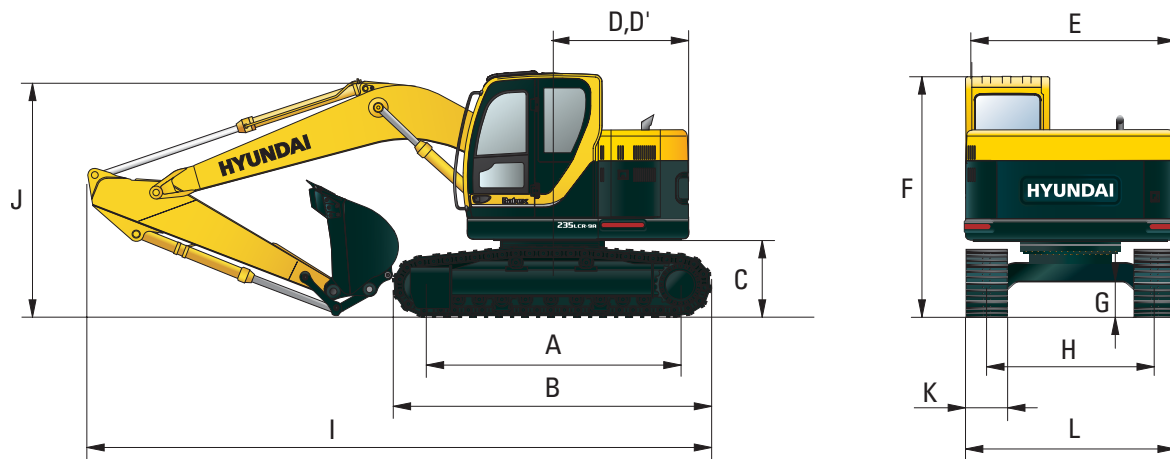


mm (ft-in)

| | | | | | | |
|-------------------------------------|-----------------|--------------------------|----------------|----------------|----------------|-----------------|
| A Tumbler distance | 3,650 (11' 12") | Boom length | 5,680 (18' 8") | | | |
| B Overall length of crawler | 4,440 (14' 7") | Arm length | 2,000 (6' 7") | 2,400 (7' 10") | 2,920 (9' 7") | |
| C Ground clearance of counterweight | 1,060 (3' 6") | I Overall length | 9,040 (29' 8") | 8,950 (29' 4") | 8,910 (29' 3") | |
| D Tail swing radius | 1,780 (6' 04") | J Overall height of boom | 3,200 (10' 6") | 3,100 (10' 2") | 3,020 (9' 11") | |
| D' Rear-end length | 1,780 (6' 04") | K Track shoe width | 600 (24") | 700 (28") | 800 (32") | 900 (36") |
| E Overall width of upperstructure | 2,980 (9' 9") | L Overall width | 2,990 (9' 10") | 3,090 (10' 2") | 3,190 (10' 6") | 3,290 (10' 10") |
| F Overall height of cab | 2,950 (9' 8") | | | | | |
| G Min. ground clearance | 480 (1' 7") | | | | | |
| H Track gauge | 2,390 (7' 10") | | | | | |

R235LCR-9A WORKING RANGE


mm (ft-in)

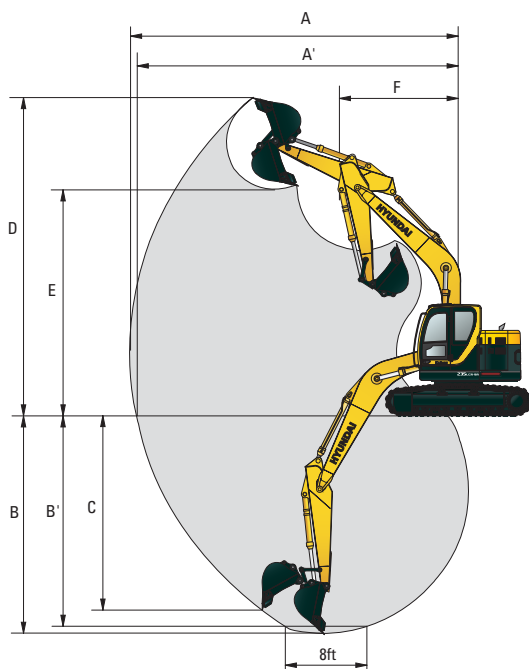

| | | | |
|------------------------------------|-----------------|-----------------|-----------------|
| Boom length | 5,680 (18' 8") | | |
| Arm length | 2,000 (6' 7") | 2,400 (7' 10") | 2,920 (9' 7") |
| A Max. digging reach | 9,040 (29' 8") | 9,430 (30' 11") | 9,910 (32' 6") |
| A' Max. digging reach on ground | 8,860 (29' 1") | 9,260 (30' 5") | 9,750 (31' 12") |
| B Max. digging depth | 5,780 (18' 12") | 6,180 (20' 3") | 6,700 (21' 12") |
| B' Max. digging depth (8' level) | 5,550 (18' 3") | 5,980 (19' 7") | 6,530 (21' 5") |
| C Max. vertical wall digging depth | 5,140 (16' 10") | 5,710 (18' 9") | 6,270 (20' 7") |
| D Max. digging height | 10,090 (33' 1") | 10,420 (34' 2") | 10,830 (35' 6") |
| E Max. dumping height | 7,190 (23' 7") | 7,510 (24' 8") | 7,890 (25' 11") |
| F Min. swing radius | 2,860 (9' 5") | 2,550 (8' 4") | 2,350 (7' 9") |

Dimensions & Working Range

R235LCR-9A (DOZER TYPE) DIMENSIONS

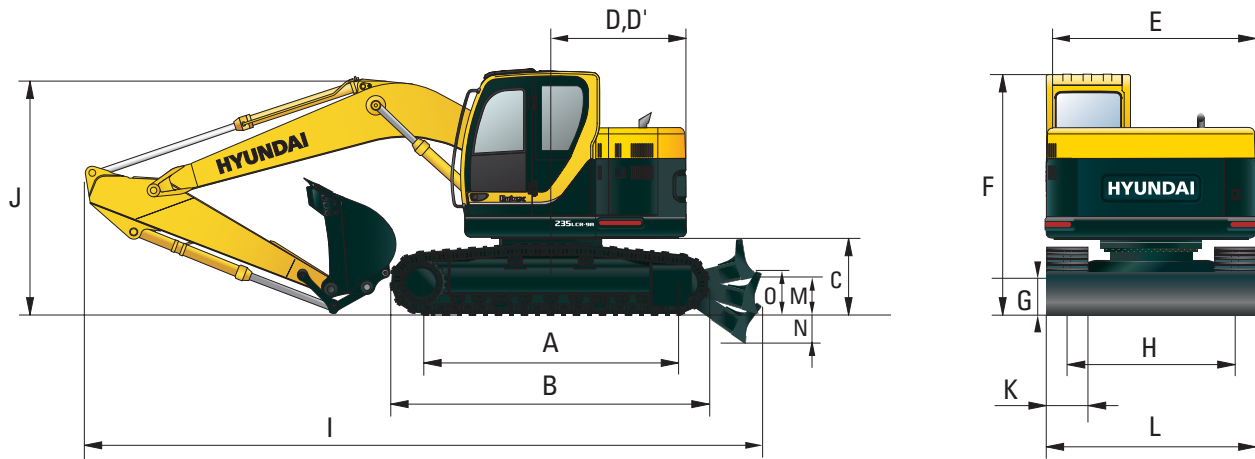


mm (ft-in)

| | | | | | | |
|-------------------------------------|-----------------|--------------------------|------------------|----------------|----------------|-----------------|
| A Tumbler distance | 3,650 (11' 12") | Boom length | 5,680 (18' 8") | | | |
| B Overall length of crawler | 4,440 (14' 7") | Arm length | 2,000 (6' 7") | 2,400 (7' 10") | 2,920 (9' 7") | |
| C Ground clearance of counterweight | 1,060 (3' 6") | I Overall length | 10,020 (32' 10") | 9,930 (32' 7") | 9,890 (32' 5") | |
| D Tail swing radius | 1,780 (6' 04") | J Overall height of boom | 3,200 (10' 6") | 3,100 (10' 2") | 3,020 (9' 11") | |
| D' Rear-end length | 1,780 (6' 04") | K Track shoe width | 600 (24") | 700 (28") | 800 (32") | 900 (36") |
| E Overall width of upperstructure | 2,980 (9' 9") | L Overall width | 2990 (9' 10") | 3,090 (10' 2") | 3,190 (10' 6") | 3,290 (10' 10") |
| F Overall height of cab | 2,950 (9' 8") | | | | | |
| G Min. ground clearance | 480 (1' 7") | | | | | |
| H Track gauge | 2,390 (7' 10") | | | | | |
| M Ground clearance of blade up | 575 (1' 11") | | | | | |
| N Depth of blade down | 390 (1' 3") | | | | | |
| O Height of blade | 710 (2' 4") | | | | | |

R235LCR-9A (DOZER TYPE) WORKING RANGE

mm (ft-in)

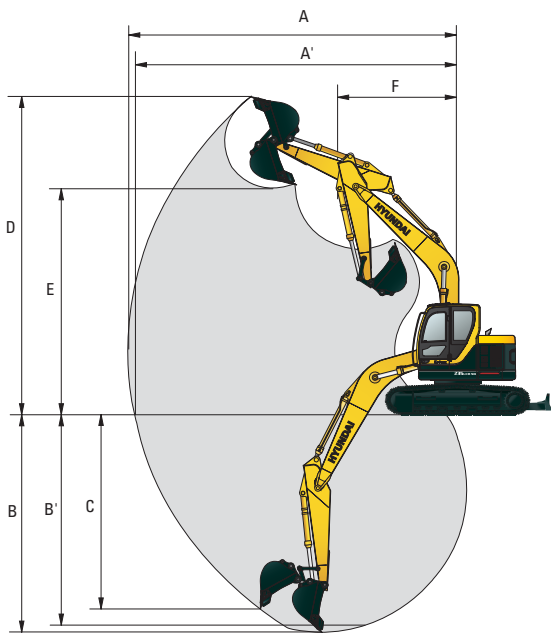











| | | | |
|------------------------------------|-----------------|-----------------|-----------------|
| Boom length | 5,680 (18' 8") | | |
| Arm length | 2,000 (6' 7") | 2,400 (7' 10") | 2,920 (9' 7") |
| A Max. digging reach | 9,040 (29' 8") | 9,430 (30' 11") | 9,910 (32' 6") |
| A' Max. digging reach on ground | 8,860 (29' 1") | 9,260 (30' 5") | 9,750 (31' 12") |
| B Max. digging depth | 5,780 (18' 3") | 6,180 (20' 3") | 6,700 (21' 12") |
| B' Max. digging depth (8' level) | 5,555 (18' 3") | 5,980 (19' 7") | 6,530 (21' 5") |
| C Max. vertical wall digging depth | 5,140 (16' 10") | 5,710 (18' 9") | 6,270 (20' 7") |
| D Max. digging height | 10,090 (33' 1") | 10,420 (34' 2") | 10,830 (35' 6") |
| E Max. dumping height | 7,190 (23' 7") | 7,510 (24' 8") | 7,890 (25' 11") |
| F Min. swing radius | 2,860 (9' 5") | 2,550 (8' 4") | 2,350 (7' 9") |

Lifting Capacity











R235LCR-9A

 Rating over-front  Rating over-side or 360 degree











Boom : 5.68 m (18' 8") / Arm : 2.0 m (6' 7") / Bucket : 0.80 m³ (1.05yd) SAE heaped / Shoe : 600mm(24") triple grouser

| Load point height m (ft) | | Load radius | | | | | | | | At max. reach | | |
|-----------------------------|----|---|---|---|---|---|---|---|---|---|---|--------|
| | | 3.0 m (10 ft) | | 4.5 m (15 ft) | | 6.0 m (20 ft) | | 7.5 m (25 ft) | | Capacity | | Reach |
| | |  |  |  |  |  |  |  |  |  |  | m (ft) |
| 10.5 m (35 ft) | kg | | | | | | | | | *4210 | *4210 | 4.63 |
| | lb | | | | | | | | | *9280 | *9280 | (15.2) |
| 9.0 m (30 ft) | kg | | | | | | | | | *4630 | *4630 | 4.48 |
| | lb | | | | | | | | | *10210 | *10210 | (14.7) |
| 7.5 m (25 ft) | kg | | | *4820 | *4820 | | | | | *4150 | *4150 | 6.56 |
| | lb | | | *10630 | *10630 | | | | | *9150 | *9150 | (21.5) |
| 6.0 m (20 ft) | kg | | | *4980 | *4980 | *4590 | *4590 | | | *4050 | 3060 | 7.70 |
| | lb | | | *10980 | *10980 | *10120 | *10120 | | | *8930 | 6750 | (25.3) |
| 4.5 m (15 ft) | kg | *8350 | *8350 | *5930 | *5930 | *4910 | 4570 | | | *4050 | 2560 | 8.36 |
| | lb | *18410 | *18410 | *13070 | *13070 | *10820 | 10080 | | | *8930 | 5640 | (27.4) |
| 3.0 m (10 ft) | kg | | | *7310 | 6760 | *5490 | 4310 | *4620 | 2960 | *4080 | 2320 | 8.67 |
| | lb | | | *16120 | 14900 | *12100 | 9500 | *10190 | 6530 | *8990 | 5110 | (28.4) |
| 1.5 m (5 ft) | kg | | | *8410 | 6250 | *6040 | 4070 | *4820 | 2860 | *4130 | 2270 | 8.66 |
| | lb | | | *18540 | 13780 | *13320 | 8970 | *10630 | 6310 | *9110 | 5000 | (28.4) |
| Ground Line | kg | | | *8720 | 6020 | *6300 | 3910 | | | *4150 | 2390 | 8.36 |
| | lb | | | *19220 | 13270 | *13890 | 8620 | | | *9150 | 5270 | (27.4) |
| -1.5 m (-5 ft) | kg | *11480 | *11480 | *8320 | 5980 | *6110 | 3860 | | | *4070 | 2760 | 7.69 |
| | lb | *25310 | *25310 | *18340 | 13180 | *13470 | 8510 | | | *8970 | 6080 | (25.2) |
| -3.0 m (-10 ft) | kg | *9710 | *9710 | *7190 | 6090 | *5140 | 3950 | | | *3660 | 3660 | 6.55 |
| | lb | *21410 | *21410 | *15850 | 13430 | *11330 | 8710 | | | *8070 | 8070 | (21.5) |

Boom : 5.68 m (18' 8") / Arm : 2.40 m (7' 10") / Bucket : 0.80 m³ (1.05 yd) SAE heaped / Shoe : 600mm(24") triple grouser

| Load point height m (ft) | | Load radius | | | | | | | | At max. reach | | | | |
|-----------------------------|----|---|---|---|---|---|---|---|---|---|---|----------|-------|--------|
| | | 1.5 m (5 ft) | | 3.0 m (10 ft) | | 4.5 m (15 ft) | | 6.0 m (20 ft) | | 7.5 m (25 ft) | | Capacity | | Reach |
| | |  |  |  |  |  |  |  |  |  |  | m (ft) | | |
| 9.0 m (30 ft) | kg | | | | | | | | | | | *4110 | *4110 | 5.25 |
| | lb | | | | | | | | | | | *9060 | *9060 | (17.2) |
| 7.5 m (25 ft) | kg | | | | | *4280 | *4280 | | | | | *3820 | 3670 | 7.07 |
| | lb | | | | | *9440 | *9440 | | | | | *8420 | 8090 | (23.2) |
| 6.0 m (20 ft) | kg | | | | | *4500 | *4500 | *4220 | *4220 | | | *3760 | 2780 | 8.12 |
| | lb | | | | | *9920 | *9920 | *9300 | *9300 | | | *8290 | 6130 | (26.6) |
| 4.5 m (15 ft) | kg | | | *7270 | *7270 | *5450 | *5450 | *4600 | *4600 | *3950 | 3080 | *3770 | 2350 | 8.74 |
| | lb | | | *16030 | *16030 | *12020 | *12020 | *10140 | *10140 | *8710 | 6790 | *8310 | 5180 | (28.7) |
| 3.0 m (10 ft) | kg | | | *11380 | *11380 | *6850 | *6850 | *5230 | 4350 | *4420 | 2980 | *3820 | 2150 | 9.04 |
| | lb | | | *25090 | *25090 | *15100 | *15100 | *11530 | 9590 | *9740 | 6570 | *8420 | 4740 | (29.7) |
| 1.5 m (5 ft) | kg | | | | | *8100 | 6310 | *5840 | 4080 | *4690 | 2850 | 3850 | 2090 | 9.03 |
| | lb | | | | | *17860 | 13910 | *12870 | 8990 | *10340 | 6280 | 8490 | 4610 | (29.6) |
| Ground Line | kg | | | *9120 | *9120 | *8640 | 6000 | *6210 | 3890 | *4820 | 2750 | *3930 | 2190 | 8.74 |
| | lb | | | *20110 | *20110 | *19050 | 13230 | *13690 | 8580 | *10630 | 6060 | *8660 | 4830 | (28.7) |
| -1.5 m (-5 ft) | kg | *9720 | *9720 | *12220 | 11860 | *8450 | 5920 | *6160 | 3810 | | | *3900 | 2490 | 8.12 |
| | lb | *21430 | *21430 | *26940 | 26150 | *18630 | 13050 | *13580 | 8400 | | | *8600 | 5490 | (26.6) |
| -3.0 m (-10 ft) | kg | *14180 | *14180 | *10550 | *10550 | *7550 | 5990 | *5480 | 3850 | | | *3650 | 3190 | 7.06 |
| | lb | *31260 | *31260 | *23260 | *23260 | *16640 | 13210 | *12080 | 8490 | | | *8050 | 7030 | (23.2) |
| -4.5 m (-15 ft) | kg | | | *7670 | *7670 | *5530 | *5530 | | | | | | | |
| | lb | | | *16910 | *16910 | *12190 | *12190 | | | | | | | |

Boom : 5.68 m (18' 8") / Arm : 2.92 m (9' 7") / Bucket : 0.80 m³ (1.05 yd) SAE heaped / Shoe : 600mm(24") triple grouser

| Load point height m (ft) | | Load radius | | | | | | | | At max. reach | | | | |
|-----------------------------|----|---|---|---|---|---|---|---|---|---|---|----------|-------|--------|
| | | 1.5 m (5 ft) | | 3.0 m (10 ft) | | 4.5 m (15 ft) | | 6.0 m (20 ft) | | 7.5 m (25 ft) | | Capacity | | Reach |
| | |  |  |  |  |  |  |  |  |  |  | m (ft) | | |
| 9.0 m (30 ft) | kg | | | | | *2970 | *2970 | | | | | *3630 | *3630 | 6.12 |
| | lb | | | | | *6550 | *6550 | | | | | *8000 | *8000 | (20.1) |
| 7.5 m (25 ft) | kg | | | | | | | *3310 | *3310 | | | *3460 | 3180 | 7.70 |
| | lb | | | | | | | *7300 | *7300 | | | *7630 | 7010 | (25.3) |
| 6.0 m (20 ft) | kg | | | | | | | *3780 | *3780 | | | *3430 | 2480 | 8.66 |
| | lb | | | | | | | *8330 | *8330 | | | *7560 | 5470 | (28.4) |
| 4.5 m (15 ft) | kg | | | | | *4810 | *4810 | *4190 | *4190 | *3860 | 3140 | *3460 | 2120 | 9.24 |
| | lb | | | | | *10600 | *10600 | *9240 | *9240 | *8510 | 6920 | *7630 | 4670 | (30.3) |
| 3.0 m (10 ft) | kg | | | *9730 | *9730 | *6240 | *6240 | *4860 | 4410 | *4150 | 3000 | *3520 | 1940 | 9.52 |
| | lb | | | *21450 | *21450 | *13760 | *13760 | *10710 | 9720 | *9150 | 6610 | *7760 | 4280 | (31.2) |
| 1.5 m (5 ft) | kg | | | *9500 | *9500 | *7650 | 6410 | *5560 | 4110 | *4490 | 2850 | 3520 | 1890 | 9.52 |
| | lb | | | *20940 | *20940 | *16870 | 14130 | *12260 | 9060 | *9900 | 6280 | 7760 | 4170 | (31.2) |
| Ground Line | kg | | | *9890 | *9890 | *8460 | 6010 | *6050 | 3880 | *4720 | 2730 | *3650 | 1960 | 9.24 |
| | lb | | | *21800 | *21800 | *18650 | 13250 | *13340 | 8550 | *10410 | 6020 | *8050 | 4320 | (30.3) |
| -1.5 m (-5 ft) | kg | *8800 | *8800 | *12860 | 11680 | *8530 | 5850 | *6160 | 3760 | *4690 | 2660 | *3670 | 2190 | 8.66 |
| | lb | *19400 | *19400 | *28350 | 25750 | *18810 | 12900 | *13580 | 8290 | *10340 | 5860 | *8090 | 4830 | (28.4) |
| -3.0 m (-10 ft) | kg | *12230 | *12230 | *11440 | *11440 | *7900 | 5870 | *5740 | 3750 | | | *3560 | 2720 | 7.69 |
| | lb | *26960 | *26960 | *25220 | *25220 | *17420 | 12940 | *12650 | 8270 | | | *7850 | 6000 | (25.2) |
| -4.5 m (-15 ft) | kg | | | *8990 | *8990 | *6360 | 6050 | | | | | *2980 | 2980 | 6.11 |
| | lb | | | *19820 | *19820 | *14020 | 13340 | | | | | *6570 | *6570 | (20.0) |











- Lifting capacity is based on SAE J1097, ISO 10567.
- Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The load point is a hook located on the back of the bucket.
- (*) indicates the load limited by hydraulic capacity.

Lifting Capacity











R235LCR-9A (DOZER TYPE)

 Rating over-front  Rating over-side or 360 degree

Boom : 5.68 m (18' 8") / Arm : 2.0 m (6' 7") / Bucket : 0.80 m³ (1.05yd) SAE heaped / Shoe : 600mm(24") triple grouser, Dozer blade Down

| Load point height m (ft) | | Load radius | | | | | | | | At max. reach | | Reach m (ft) |
|-----------------------------|----------|---|---|---|---|---|---|--|---|---|---|-----------------|
| | | 3.0 m (10 ft) | | 4.5 m (15 ft) | | 6.0 m (20 ft) | | 7.5 m (25 ft) | | Capacity | | |
| | |  |  |  |  |  |  |  |  |  |  | |
| 10.5 m (35 ft) | kg lb | | | | | | | | | *4210 *9280 | *4210 *9280 | 4.63 (15.2) |
| 9.0 m (30 ft) | kg lb | | | | | | | | | *4630 *10210 | *4630 *10210 | 4.48 (14.7) |
| 7.5 m (25 ft) | kg lb | | | *4820 *10630 | *4820 *10630 | | | | | *4150 *9150 | *4150 *9150 | 6.56 (21.5) |
| 6.0 m (20 ft) | kg lb | | | *4980 *10980 | *4980 *10980 | *4590 *10120 | *4590 *10120 | | | *4050 *8930 | 3460 7630 | 7.70 (25.3) |
| 4.5 m (15 ft) | kg lb | *8350 *18410 | *8350 *18410 | *5930 *13070 | *5930 *13070 | *4910 *10820 | *4910 *10820 | | | *4050 *8930 | 2920 6440 | 8.36 (27.4) |
| 3.0 m (10 ft) | kg lb | | | *7310 *16120 | *7310 *16120 | *5490 *12100 | 4890 10780 | *4620 *10190 | 3380 7450 | *4080 *8990 | 2670 5890 | 8.67 (28.4) |
| 1.5 m (5 ft) | kg lb | | | *8410 *18540 | 7130 15720 | *6040 *13320 | 4640 10230 | *4820 *10630 | 3280 7230 | *4130 *9110 | 2620 5780 | 8.66 (28.4) |
| Ground Line | kg lb | | | *8720 *19220 | 6900 15210 | *6300 *13890 | 4480 9880 | | | *4150 *9150 | 2760 6080 | 8.36 (27.4) |
| -1.5 m (-5 ft) | kg lb | *11480 *25310 | *11480 *25310 | *8320 *18340 | 6860 15120 | *6110 *13470 | 4430 9770 | | | *4070 *8970 | 3160 6970 | 7.69 (25.2) |
| -3.0 m (-10 ft) | kg lb | *9710 *21410 | *9710 *21410 | *7190 *15850 | 6980 15390 | *5140 *11330 | 4520 9960 | | | *3660 *8070 | *3660 *8070 | 6.55 (21.5) |

Boom : 5.68 m (18' 8") / Arm : 2.0 m (6' 7") / Bucket : 0.80 m³ (1.05yd) SAE heaped / Shoe : 600mm(24") triple grouser, Dozer blade Up

| Load point height m (ft) | | Load radius | | | | | | | | At max. reach | | Reach m (ft) |
|-----------------------------|----------|---|---|---|---|---|---|--|---|---|---|-----------------|
| | | 3.0 m (10 ft) | | 4.5 m (15 ft) | | 6.0 m (20 ft) | | 7.5 m (25 ft) | | Capacity | | |
| | |  |  |  |  |  |  |  |  |  |  | |
| 10.5 m (35 ft) | kg lb | | | | | | | | | *4210 *9280 | *4210 *9280 | 4.63 (15.2) |
| 9.0 m (30 ft) | kg lb | | | | | | | | | *4630 *10210 | *4630 *10210 | 4.48 (14.7) |
| 7.5 m (25 ft) | kg lb | | | *4820 *10630 | *4820 *10630 | | | | | *4150 *9150 | *4150 *9150 | 6.56 (21.5) |
| 6.0 m (20 ft) | kg lb | | | *4980 *10980 | *4980 *10980 | *4590 *10120 | *4590 *10120 | | | *4050 *8930 | 3250 7170 | 7.70 (25.3) |
| 4.5 m (15 ft) | kg lb | *8350 *18410 | *8350 *18410 | *5930 *13070 | *5930 *13070 | *4910 *10820 | 4830 10650 | | | *4050 *8930 | 2730 6020 | 8.36 (27.4) |
| 3.0 m (10 ft) | kg lb | | | *7310 *16120 | 7140 15740 | *5490 *12100 | 4570 10080 | *4620 *10190 | 3160 6970 | *4080 *8990 | 2490 5490 | 8.67 (28.4) |
| 1.5 m (5 ft) | kg lb | | | *8410 *18540 | 6630 14620 | *6040 *13320 | 4330 9550 | *4820 *10630 | 3050 6720 | *4060 *8950 | 2440 5380 | 8.66 (28.4) |
| Ground Line | kg lb | | | *8720 *19220 | 6400 14110 | *6300 *13890 | 4170 9190 | | | *4150 *9150 | 2570 5670 | 8.36 (27.4) |
| -1.5 m (-5 ft) | kg lb | *11480 *25310 | *11480 *25310 | *8320 *18340 | 6360 14020 | *6110 *13470 | 4120 9080 | | | *4070 *8970 | 2950 6500 | 7.69 (25.2) |
| -3.0 m (-10 ft) | kg lb | *9710 *21410 | *9710 *21410 | *7190 *15850 | 6470 14260 | *5140 *11330 | 4210 9280 | | | *3660 *8070 | *3660 *8070 | 6.55 (21.5) |













1. Lifting capacity is based on SAE J1097, ISO 10567.
2. Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The load point is a hook located on the back of the bucket.
4. (*) indicates the load limited by hydraulic capacity.

Lifting Capacity













R235LCR-9A (DOZER TYPE)

 Rating over-front  Rating over-side or 360 degree

Boom : 5.68 m (18' 8") / Arm : 2.40 m (7' 10") / Bucket : 0.80 m³ (1.05 yd) SAE heaped / Shoe : 600mm(24") triple grouser, Dozer blade Down

| Load point height m (ft) | | Load radius | | | | | | | | | | At max. reach | | | |
|-----------------------------|----|---|---|---|---|---|---|---|--|---|---|---|---|-----------------|-------------|
| | | 1.5 m (5 ft) | | 3.0 m (10 ft) | | 4.5 m (15 ft) | | 6.0 m (20 ft) | | 7.5 m (25 ft) | | Capacity | | Reach m (ft) | |
| | |  |  |  |  |  |  |  |  |  |  |  |  | | |
| 9.0 m (30 ft) | kg | | | | | | | | | | | | *4110 | *4110 | 5.25 (17.2) |
| 7.5 m (25 ft) | kg | | | | | *4280 | *4280 | | | | | | *9060 | *9060 | 7.07 (23.2) |
| 6.0 m (20 ft) | kg | | | | | *9440 | *9440 | | | | | | *3820 | *3820 | 8.12 (26.6) |
| 6.0 m (20 ft) | lb | | | | | *4500 | *4500 | *4220 | *4220 | | | | *8420 | *8420 | 3160 (9.04) |
| 4.5 m (15 ft) | kg | | | | | *9920 | *9920 | *9300 | *9300 | | | | *3760 | *3760 | 2700 (8.74) |
| 4.5 m (15 ft) | lb | | | | | *7270 | *7270 | *5450 | *5450 | *4600 | *4600 | *3950 | 3510 | 3170 | 2700 (8.74) |
| 3.0 m (10 ft) | kg | | | | | *16030 | *16030 | *12020 | *12020 | *10140 | *10140 | *8710 | 7740 | *8310 | 5950 (28.7) |
| 3.0 m (10 ft) | lb | | | | | *11380 | *11380 | *6850 | *6850 | *5230 | 4920 | *4420 | 3400 | *3820 | 2480 (9.04) |
| 1.5 m (5 ft) | kg | | | | | *25090 | *25090 | *15100 | *15100 | *11530 | 10850 | *9740 | 7500 | *8420 | 5470 (29.7) |
| 1.5 m (5 ft) | lb | | | | | *8100 | 7190 | *5840 | 4650 | *4690 | 3270 | *3880 | 2420 | *3880 | 2420 (9.03) |
| Ground Line | kg | | | | | *17860 | 15850 | *12870 | 10250 | *10340 | 7210 | *8550 | 5340 | *8550 | 5340 (29.6) |
| Ground Line | lb | | | | | *8640 | 6880 | *6210 | 4460 | *4820 | 3170 | *3930 | 2530 | *3930 | 2530 (8.74) |
| -1.5 m (-5 ft) | kg | *9720 | *9720 | *12220 | *12220 | *19050 | 15170 | *13690 | 9830 | *10630 | 6990 | *8660 | 5580 | *8660 | 5580 (28.7) |
| -1.5 m (-5 ft) | lb | *21430 | *21430 | *26940 | *26940 | *8450 | 6790 | *6160 | 4370 | *4820 | 2950 | *3900 | 2870 | *3900 | 2870 (8.12) |
| -3.0 m (-10 ft) | kg | *14180 | *14180 | *10550 | *10550 | *18630 | 14970 | *13580 | 9630 | | | *8600 | 6330 | *8600 | 6330 (26.6) |
| -3.0 m (-10 ft) | lb | *31260 | *31260 | *23260 | *23260 | *7550 | 6870 | *5480 | 4420 | | | *3650 | 3650 | *3650 | 3650 (7.06) |
| -4.5 m (-15 ft) | kg | | | | | *16910 | *16910 | *12190 | *12190 | | | | | | |
| -4.5 m (-15 ft) | lb | | | | | *16910 | *16910 | *12190 | *12190 | | | | | | |

Boom : 5.68 m (18' 8") / Arm : 2.40 m (7' 10") / Bucket : 0.80 m³ (1.05 yd) SAE heaped / Shoe : 600mm(24") triple grouser, Dozer blade Up

| Load point height m (ft) | | Load radius | | | | | | | | | | At max. reach | | | |
|-----------------------------|----|---|---|---|---|---|---|---|--|---|---|---|---|-----------------|-------------|
| | | 1.5 m (5 ft) | | 3.0 m (10 ft) | | 4.5 m (15 ft) | | 6.0 m (20 ft) | | 7.5 m (25 ft) | | Capacity | | Reach m (ft) | |
| | |  |  |  |  |  |  |  |  |  |  |  |  | | |
| 9.0 m (30 ft) | kg | | | | | | | | | | | | *4110 | *4110 | 5.25 (17.2) |
| 7.5 m (25 ft) | kg | | | | | *4280 | *4280 | | | | | | *9060 | *9060 | 7.07 (23.2) |
| 6.0 m (20 ft) | kg | | | | | *9440 | *9440 | | | | | | *3820 | *3820 | 8.12 (26.6) |
| 6.0 m (20 ft) | lb | | | | | *4500 | *4500 | *4220 | *4220 | | | | *8420 | *8420 | 2960 (9.04) |
| 4.5 m (15 ft) | kg | | | | | *9920 | *9920 | *9300 | *9300 | | | | *3760 | *3760 | 2960 (9.04) |
| 4.5 m (15 ft) | lb | | | | | *7270 | *7270 | *5450 | *5450 | *4600 | *4600 | *3950 | 3280 | *3770 | 2520 (8.74) |
| 3.0 m (10 ft) | kg | | | | | *16030 | *16030 | *12020 | *12020 | *10140 | *10140 | *8710 | 7230 | *8310 | 5560 (28.7) |
| 3.0 m (10 ft) | lb | | | | | *11380 | *11380 | *6850 | *6850 | *5230 | 4610 | *4420 | 3170 | *3820 | 2300 (9.04) |
| 1.5 m (5 ft) | kg | | | | | *25090 | *25090 | *15100 | *15100 | *11530 | 10160 | *9740 | 6990 | *8420 | 5070 (29.7) |
| 1.5 m (5 ft) | lb | | | | | *8100 | 6690 | *5840 | 4340 | *4690 | 3050 | *3780 | 2250 | *3780 | 2250 (9.03) |
| Ground Line | kg | | | | | *17860 | 14750 | *12870 | 9570 | *10340 | 6720 | *8330 | 4960 | *8330 | 4960 (29.6) |
| Ground Line | lb | | | | | *8640 | 6380 | *6210 | 4150 | *4820 | 2950 | *3930 | 2360 | *3930 | 2360 (8.74) |
| -1.5 m (-5 ft) | kg | *9720 | *9720 | *12220 | *12220 | *19050 | 14070 | *13690 | 9150 | *10630 | 6500 | *8660 | 5200 | *8660 | 5200 (28.7) |
| -1.5 m (-5 ft) | lb | *21430 | *21430 | *26940 | *26940 | *8450 | 6300 | *6160 | 4070 | | | *3900 | 2670 | *3900 | 2670 (8.12) |
| -3.0 m (-10 ft) | kg | *14180 | *14180 | *10550 | *10550 | *18630 | 13890 | *13580 | 8970 | | | *8600 | 5890 | *8600 | 5890 (26.6) |
| -3.0 m (-10 ft) | lb | *31260 | *31260 | *23260 | *23260 | *7550 | 6370 | *5480 | 4110 | | | *3650 | 3410 | *3650 | 3410 (9.06) |
| -4.5 m (-15 ft) | kg | | | | | *16910 | *16910 | *12190 | *12190 | | | | | | |
| -4.5 m (-15 ft) | lb | | | | | *16910 | *16910 | *12190 | *12190 | | | | | | |













- Lifting capacity is based on SAE J1097, ISO 10567.
- Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The load point is a hook located on the back of the bucket.
- (*) indicates the load limited by hydraulic capacity.

Lifting Capacity













R235LCR-9A (DOZER TYPE)

 Rating over-front  Rating over-side or 360 degree

Boom : 5.68 m (18' 8") / Arm : 2.92 m (9' 7") / Bucket : 0.80 m³ (1.05 yd³) SAE heaped / Shoe : 600mm(24") triple grouser, Dozer blade Down

| Load point height m (ft) | | Load radius | | | | | | | | | | At max. reach | | |
|-----------------------------|----------|---|---|---|---|---|---|---|---|---|---|---|---|-----------------|
| | | 1.5 m (5 ft) | | 3.0 m (10 ft) | | 4.5 m (15 ft) | | 6.0 m (20 ft) | | 7.5 m (25 ft) | | Capacity | | Reach m (ft) |
| | |  |  |  |  |  |  |  |  |  |  |  |  | |
| 9.0 m (30 ft) | kg lb | | | | | *2970 *6550 | *2970 *6550 | | | | | *3630 *8000 | *3630 *8000 | 6.12 (20.1) |
| 7.5 m (25 ft) | kg lb | | | | | | | *3310 *7300 | *3310 *7300 | | | *3460 *7630 | *3460 *7630 | 7.70 (25.3) |
| 6.0 m (20 ft) | kg lb | | | | | | | *3780 *8330 | *3780 *8330 | | | *3430 *7560 | *2830 6240 | 8.66 (28.4) |
| 4.5 m (15 ft) | kg lb | | | | | *4810 *10600 | *4810 *10600 | *4190 *9240 | *4190 *9240 | *3860 *8510 | 3560 7850 | *3460 *7630 | 2440 5380 | 9.24 (30.3) |
| 3.0 m (10 ft) | kg lb | | | *9730 *21450 | *9730 *21450 | *6240 *13760 | *6240 *13760 | *4860 *10710 | *4860 *10710 | *4150 *9150 | 3420 7540 | *3520 *7760 | 2250 4960 | 9.52 (31.2) |
| 1.5 m (5 ft) | kg lb | | | *9500 *20940 | *9500 *20940 | *7650 *16870 | 7300 16090 | *5560 *12260 | 4680 10320 | *4490 *9900 | 3270 7210 | *3590 *7910 | 2200 4850 | 9.52 (31.2) |
| Ground Line | kg lb | | | *9890 *21800 | *9890 *21800 | *8460 *18650 | 6890 15190 | *6050 *13340 | 4450 9810 | *4720 *10410 | 3140 6920 | *3650 *8050 | 2280 5030 | 9.24 (30.3) |
| -1.5 m (-5 ft) | kg lb | *8800 *19400 | *8800 *19400 | *12860 *28350 | *12860 *28350 | *8530 *18810 | 6730 14840 | *6160 *13580 | 4320 9520 | *4690 *10340 | 3080 6790 | *3670 *8090 | 2540 5600 | 8.66 (28.4) |
| -3.0 m (-10 ft) | kg lb | *12230 *26960 | *12230 *26960 | *11440 *25220 | *11440 *25220 | *7900 *17420 | 6750 14880 | *5740 *12650 | 4320 9520 | | | *3560 *7850 | 3120 6880 | 7.69 (25.2) |
| -4.5 m (-15 ft) | kg lb | | | *8990 *19820 | *8990 *19820 | *6360 *14020 | *6360 *14020 | | | | | *2980 *6570 | *2980 *6570 | 6.11 (20.0) |

Boom : 5.68 m (18' 8") / Arm : 2.92 m (9' 7") / Bucket : 0.80 m³ (1.05 yd³) SAE heaped / Shoe : 600mm(24") triple grouser, Dozer blade Up

| Load point height m (ft) | | Load radius | | | | | | | | | | At max. reach | | |
|-----------------------------|----------|---|---|---|---|---|---|---|---|---|---|---|---|-----------------|
| | | 1.5 m (5 ft) | | 3.0 m (10 ft) | | 4.5 m (15 ft) | | 6.0 m (20 ft) | | 7.5 m (25 ft) | | Capacity | | Reach m (ft) |
| | |  |  |  |  |  |  |  |  |  |  |  |  | |
| 9.0 m (30 ft) | kg lb | | | | | *2970 *6550 | *2970 *6550 | | | | | *3630 *8000 | *3630 *8000 | 6.12 (20.1) |
| 7.5 m (25 ft) | kg lb | | | | | | | *3310 *7300 | *3310 *7300 | | | *3460 *7630 | *3370 7430 | 7.70 (25.3) |
| 6.0 m (20 ft) | kg lb | | | | | | | *3780 *8330 | *3780 *8330 | | | *3430 *7560 | *2650 5840 | 8.66 (28.4) |
| 4.5 m (15 ft) | kg lb | | | | | *4810 *10600 | *4810 *10600 | *4190 *9240 | *4190 *9240 | *3860 *8510 | 3330 7340 | *3460 *7630 | 2270 5000 | 9.24 (30.3) |
| 3.0 m (10 ft) | kg lb | | | *9730 *21450 | *9730 *21450 | *6240 *13760 | *6240 *13760 | *4860 *10710 | 4670 10300 | *4150 *9150 | 3200 7050 | 3510 7740 | 2090 4610 | 9.52 (31.2) |
| 1.5 m (5 ft) | kg lb | | | *9500 *20940 | *9500 *20940 | *7650 *16870 | 6790 14970 | *5560 *12260 | 4370 9630 | *4490 *9900 | 3050 6720 | 3450 7610 | 2040 4500 | 9.52 (31.2) |
| Ground Line | kg lb | | | *9890 *21800 | *9890 *21800 | *8460 *18650 | 6390 14090 | *6050 *13340 | 4140 9130 | *4720 *10410 | 2920 6440 | 3590 7910 | 2120 4670 | 9.24 (30.3) |
| -1.5 m (-5 ft) | kg lb | *8800 *19400 | *8800 *19400 | *12860 *28350 | 12390 27320 | *8530 *18810 | 6240 13760 | *6160 *13580 | 4020 8860 | *4690 *10340 | 2860 6310 | *3670 *8090 | 2360 5200 | 8.66 (28.4) |
| -3.0 m (-10 ft) | kg lb | *12230 *26960 | *12230 *26960 | *11440 *25220 | *11440 *25220 | *7900 *17420 | 6250 13780 | *5740 *12650 | 4010 8840 | | | *3560 *7850 | 2910 6420 | 7.69 (25.2) |
| -4.5 m (-15 ft) | kg lb | | | *8990 *19820 | *8990 *19820 | *6360 *14020 | *6360 *14020 | | | | | *2980 *6570 | *2980 *6570 | 6.11 (20.0) |

- Lifting capacity is based on SAE J1097, ISO 10567.
- Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The load point is a hook located on the back of the bucket.
- (*) indicates the load limited by hydraulic capacity.