

# WOODS

## SINGLE-SPINDLE ROTARY CUTTERS



Rugged and reliable, the Woods BrushBull™ is built to tackle your toughest brush cutting chores

**WOODS**

## Single-spindle Rotary Cutters

### Table of Contents

<b>RC Series Rotary Cutters</b> .....	<b>4</b>
RC3.5	
RC4	
RC5	
RC6	
<b>Specifications Chart</b> .....	<b>5</b>
<b>Standard-duty, Single-spindle BrushBull™</b> .....	<b>6</b>
BB48X	
BB60X	
BB72X	
BB84X	
<b>Specifications Chart</b> .....	<b>7</b>
<b>Medium-duty, Single-spindle BrushBull™</b> .....	<b>8</b>
BB600X	
BB720X	
BB840X	
BB840X-P	
<b>Specifications Chart</b> .....	<b>9</b>
<b>Heavy-duty, Single-spindle BrushBull™</b> .....	<b>10</b>
BB6000X	
BB7200X	
BB8400X	
<b>Specifications Chart</b> .....	<b>11</b>
<b>Ditch Bank Mowers</b> .....	<b>12</b>
S105	
S106	
<b>Specifications Chart</b> .....	<b>12</b>

The industry's broadest selection of cutters



### Legend

**Low Horsepower-duty**

Designed and manufactured for use on lower horsepower tractors for lighter usage and basic applications.

**Standard-duty**

Designed and manufactured for typical usage and basic applications.

**Medium-duty**

Designed and manufactured for harsher usage and tougher applications.

**Heavy-duty**

Designed and manufactured for extreme usage and the most demanding applications.



Woods products are proudly made in the USA. As part of a global economy, we work with business partners around the world and export our equipment to international markets. Since 1946, we've been manufacturing in Oregon, Illinois, and supporting the growth of American jobs.

### Woods

**GENUINE PARTS**

Maintain the quality and performance of your Woods equipment with Woods genuine replacement parts, paint, and lubricants. Available from your authorized Woods dealer.

**Find a Woods Dealer**

Woods equipment is distributed through a network of authorized dealers. To find your nearest store visit us at [woodsequipment.com](http://woodsequipment.com) or call 800-319-6637.

## Proven Durability

Since 1946, Woods has grown to become the undisputed cutter expert. This legacy began with development of the first tractor-mounted rotary cutter and continues today with unmatched product innovation and service.

- Some of our earliest cutters remain in service today, because quite simply, they were built to last.
- Woods BrushBull™ single-spindle line has set the standard for today's rotary cutter market – with innovations such as the smooth, slope-top deck and quick-change blades – and continues to lead the pack.
- Put our products to the test in your own back yard. Rugged, dependable and productive — Woods rotary cutters are designed and tested for the extremes of real world use.



## Unbeatable Selection

Whether you need to clear brush along fencerows or maintain miles of interstate highway, chances are Woods has a rotary cutter model for the job.

- With 17 models to choose from, cutting widths from 42 to 84 inches, you're sure to find the right cutter for your needs.
- Four duty classes mean that you can pick the cut capacity that will handle your work — low horsepower for up to 1-inch cut capacity, standard-duty for up to 2-inch cut capacity, medium-duty for up to 3-inch cut capacity and heavy-duty for up to 4-inch cut capacity.

# WOODS

## Single-spindle Rotary Cutters

Low Horsepower Single-spindle Cutters



RC6 shown with optional chain shielding

## RC-series Single-spindle

### Models

<b>RC3.5</b>	3.5 ft
<b>RC4</b>	4 ft
<b>RC5</b>	5 ft
<b>RC6</b>	6 ft



Tractor PTO range: 12–21 hp

The RC-Series is an economical rotary cutter for maintaining grassy pastures, open fields, and recreational trails.

- Three-point hitch: Cat 1 / cantilevered
- One-inch cut capacity
- Four cutting widths and paint colors to match your tractor
- Unique smooth, sloped decks
- Stump jumpers are standard on all models
- High-strength steel and quality parts
- Three-year limited gearbox warranty

Specifications	RC3.5	RC4	RC5	RC6
<b>Tractor Engine HP</b>	12 hp	15 hp	18 hp	21 hp
<b>Hitch category / type</b>	Cat 1 / cantilevered			
<b>Cutting width</b>	3.5 ft	4 ft	5 ft	6 ft
<b>Cutting height range</b>	2"-9"			
<b>Cutting capacity</b>	1"			
<b>Gearbox horsepower</b>	50 hp			
<b>Blade tip speed</b>	11,460 fpm	13,100 fpm	13,620 fpm	14,340 fpm
<b>Deck side depth</b>	7"			
<b>Approximate weight*</b>	360 lbs	410 lbs	494 lbs	575 lbs
<b>Blade dimensions</b>	.5" x 3"			
<b>Blade carrier</b>	oval stump jumper			
<b>Tailwheel</b>	4" x 16" laminated			
<b>Driveline protection</b>	shear-bolt or slip-clutch			
<b>Frame &amp; deck support</b>	3/8" rails			
<b>Tractor PTO speed</b>	540 rpm			
<b>Quick-hitch ready</b>	yes			
<b>Cutting area shielding</b>	belt standard / chain shielding optional			
<b>Warranty (cutter/gearbox)</b>	1 year / 3 years			
* Weight without chain shielding.	Low Horsepower			

## Woods RC-Series Rotary Cutters – durable, versatile, affordable



Strong, fabricated tail wheel assembly with solid, laminated tire



Breaklink allows cutter to float and follow terrain for better cut quality



Optional bolt-on replaceable skid shoes for longer wear




Optional chain shielding for added protection from thrown objects

# WOODS

## Single-spindle Rotary Cutters

Standard-duty BrushBull™

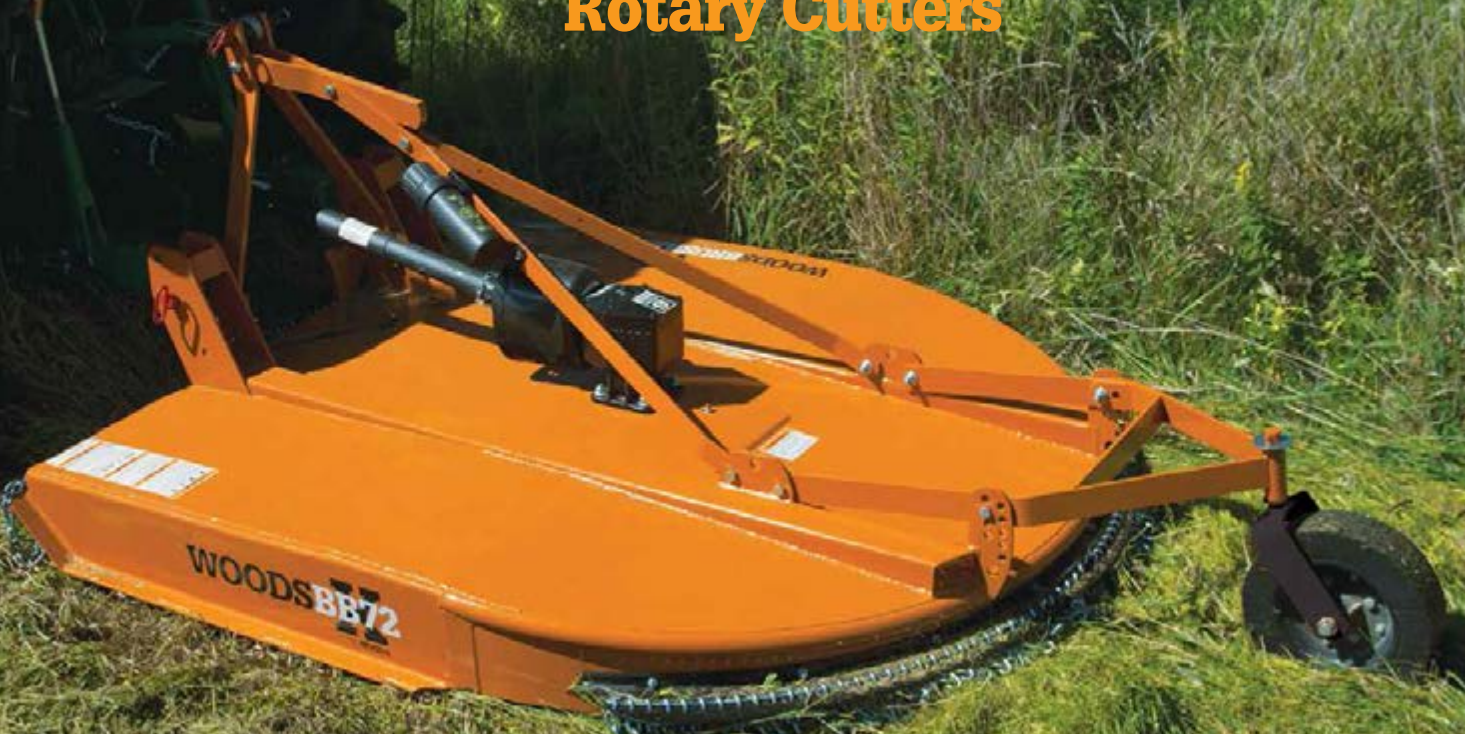

BB72X shown with optional chain shielding

## Standard-duty BrushBull™ Single-spindle

### Models

<b>BB48X</b>	48-inch
<b>BB60X</b>	60-inch
<b>BB72X</b>	72-inch
<b>BB84X</b>	84-inch

Tractor PTO range: 15–90 hp

- Three-point hitch: Cat 1 (Cat 1 and 2 on BB84X)
- Cutting capacity of 1.5 to 2 inches
- Six-year limited gearbox warranty
- Standard Quick Change blade pins
- Dual tailwheel optional on BB84X
- Paint colors to match your tractor (excluding BB84X)



Specifications	BB48X	BB60X	BB72X	BB84X
<b>Tractor PTO HP range</b>	15–50 hp	25–50 hp	30–65 hp	35–90 hp
<b>Hitch category / type</b>	Cat 1 / clevis			Cat 1 and 2 / clevis
<b>Cutting width</b>	48"	60"	72"	84"
<b>Transport width</b>	53.5"	65.5"	77.5"	89.5"
<b>Maximum overall length</b>	92"	104"	116"	128"
<b>Deck length</b>	58"	70"	84"	96"
<b>Cutting height range</b>	1–9"			
<b>Cutting capacity</b>	1.5"	2"		
<b>Gearbox horsepower</b>	65 hp		75 hp	90 hp
<b>Gearbox output shaft diameter</b>	1.57"			2"
<b>Blade tip speed</b>	13,000 fpm	14,355 fpm	14,963 fpm	15,086 fpm
<b>Blade rotation</b>	CCW			
<b>Deck side depth</b>	9.4"		9.5"	
<b>Approximate weight*</b>	498 lbs	604 lbs	828 lbs	1,084 lbs
<b>Blade dimensions</b>	(2) .38" x 3"	(2) .5" x 3"		
<b>Blade composition</b>	heat-treated alloy steel			
<b>Blade carrier</b>	oval stump jumper			round stump jumper
<b>Blade mount system</b>	Quick Change pins			
<b>Blade pin diameter</b>	1.5"			
<b>Tailwheel – laminated tire</b>	4" x 16"			optional dual
<b>Safety-shielded driveline</b>	Cat 3			Cat 4
<b>Driveline protection</b>	slip clutch or shear-pin		slip clutch	
<b>Frame &amp; deck support</b>	formed channel	3" x 4" full length structural beams		
<b>Tractor PTO speed</b>	540 rpm			
<b>Rear bumper</b>	2" tubular			
<b>Quick-hitch compatible</b>	yes			
<b>Cutting area shielding</b>	belt standard/chain shielding optional			

\* Weight without chain shielding.

Standard-duty

# WOODS

## Single-spindle Rotary Cutters

### Medium-duty BrushBull™ Single-spindle

#### Models


<b>BB600X</b>	60-inch
<b>BB720X</b>	72-inch
<b>BB840X</b>	84-inch
<b>BB840XQ</b>	84-inch 1000 rpm
<b>BB840X-P</b>	84-inch Pull-Type

Tractor PTO range: 30–120 hp

- Three-point hitch: Cat 1 and 2
- Three-inch cut capacity
- Six-year limited gearbox warranty
- Standard baffles for material distribution
- Optional dual wheels (BB720X, BB840X and BB840XQ)
- Paint colors to match your tractor (excluding BB840X models)



### Count on the Integrity of the BrushBull™ Frame

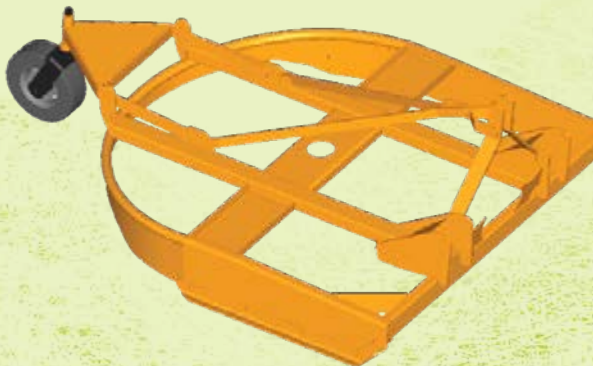

- Stress points are tied to 3-inch by 4-inch structural tubes, not on the deck plate, for added strength.
- The full frame design means strength and durability are built into every BrushBull from the frame up.
- Two-inch tubular rear bumper provides structural integrity when backing over tough brush.




Specifications	BB600X	BB720X	BB840X / BB840XQ	BB840X-P
Tractor PTO HP range	30–120 hp		40–120 hp	
Hitch category / type	Cat 1 and 2 / clevis			pull-type
Cutting width	60"	72"	84"	
Transport width	67.5"	79.5"	91.5"	
Maximum overall length	104"	116"	128"	174"
Deck length	70"	84"	96"	
Cutting height range	2–12"			
Cutting capacity	3"			
Gearbox horsepower	120 hp			
Gearbox output shaft diameter	2"			
Blade tip speed	15,525 fmp	15,900 fmp	16,000 fmp / 16,300 fmp	16,000 fmp
Blade rotation	CCW			
Deck side depth	12.6"			
Approximate weight*	1,068 lbs	1,200 lbs	1,416 lbs	1,868 lbs
Blade dimensions	(2) .5" x 4"			
Blade composition	heat-treated alloy steel			
Blade carrier	round stump jumper			
Blade mount system	Quick Change pins			
Blade pin diameter	1.5"			
Cutting deck thickness	10 gauge			
Side frame thickness	.25"			
Tailwheel – laminated tire	5" x 16"			21" laminate 24" used aircraft 29" used aircraft
Dual tailwheel	single only	optional		standard with hydraulic height control
Safety-shielded driveline	Cat 4			
Driveline protection	slip-clutch			
Frame & deck support	3" x 4" full length structural beams			
Rear bumper	2" tubular			
Tractor PTO speed	540 rpm (BB840XQ 1000 rpm)			
Quick-hitch compatible	yes			n/a
Skid-shoes	heavy-duty replaceable			
Cutting area shielding	belt standard/chain shielding optional			
	Medium-duty			

\* Weight without chain shielding.

# WOODS

## Single-spindle Rotary Cutters

Heavy-duty BrushBull™

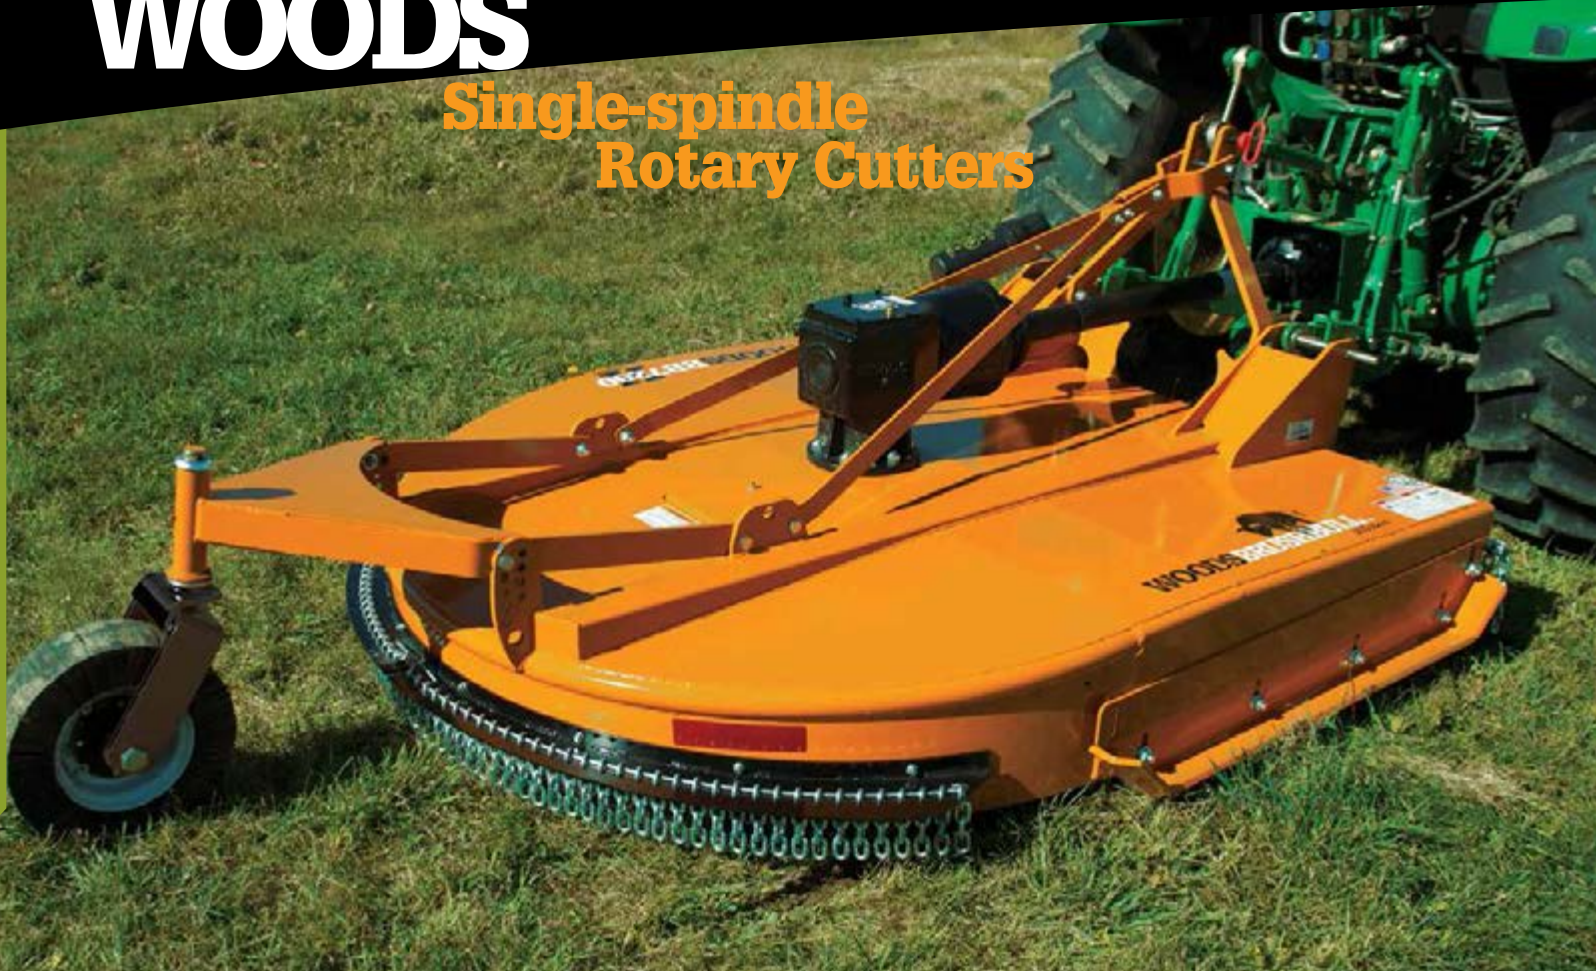

BB7200X shown with optional chain shielding

## Heavy-duty BrushBull™ Single-spindle

### Models

<b>BB6000X</b>	60-inch
<b>BB7200X</b>	72-inch
<b>BB8400X</b>	84-inch

Tractor PTO range: 40–200 hp

- Three-point hitch: Cat 1 and 2; Cat 2 and 3 on BB8400X
- Four-inch cut capacity
- Six-year limited gearbox warranty
- Adjustable skid shoes
- Standard blade ring
- Special extreme-duty stump jumper
- Optional baffle
- Optional dual wheels (BB7200X and BB8400X)

Specifications	BB6000X	BB7200X	BB8400X
<b>Tractor PTO HP range</b>	40–150 hp	50–150 hp	65–200 hp
<b>Hitch category / type</b>	Cat 1 and 2 / clevis		Cat 2 and 3 / clevis
<b>Cutting width</b>	60"	72"	84"
<b>Transport width</b>	68.5"	80.5"	92.5"
<b>Maximum overall length</b>	104"	116"	128"
<b>Deck length</b>	70"	84"	96"
<b>Cutting height range</b>	2–12"		
<b>Cutting capacity</b>	4"		
<b>Gearbox horsepower</b>	150 hp		200 hp
<b>Gearbox output shaft diameter</b>	2.38"		
<b>Blade tip speed</b>	13,575 fpm	13,950 fpm	14,250 fpm
<b>Blade rotation</b>	CCW		
<b>Deck side depth</b>	11.7"		
<b>Approximate weight*</b>	1,320 lbs	1,440 lbs	1,800 lbs
<b>Blade dimensions</b>	(2) .5" x 4"		
<b>Blade composition</b>	special heavy-duty heat treated alloy steel		
<b>Blade carrier</b>	round stump jumper		
<b>Blade mount system</b>	Quick Change pins		
<b>Blade pin diameter</b>	1.5"		
<b>Cutting deck thickness</b>	7 gauge		
<b>Side frame thickness</b>	.25"		
<b>Tailwheel – laminated tire</b>	5" x 16"		
<b>Safety-shielded driveline</b>	Cat 5		
<b>Driveline protection</b>	slip-clutch		
<b>Frame &amp; deck support</b>	3" x 4" full length structural beams		
<b>Rear bumper</b>	2" tubular		
<b>Tractor PTO speed</b>	540 rpm		
<b>Quick Hitch Compatible</b>	yes		
<b>Cutting area shielding</b>	belt standard/chain shielding optional		
* Weight without chain shielding.	Heavy-duty		



## Ditch Bank Cutter

Hard-to-reach road shoulders and roadside ditch banks are no match for the Woods mechanical drive Ditch Bank Cutter. From 75-degrees up to 78-degrees down, or any place in between, this cutter will clear brush and weeds in a snap. The Woods mower head “floats” over rough terrain or can be held hydraulically at any angle.

### Models

**S105** 5-foot

**S106** 6-foot

Tractor PTO range: 40—90 hp

- Mow at extreme angles and minimize U-joint wear with the Woods self-equalizing universal drive assembly
- Rely on twin box-type construction and a ribbed, reinforced deck for maximum structural strength and confidence to tackle the most challenging slopes
- Chain shielding standard
- Available 540 or 1000 rpm

Specifications	S105	S106
<b>Tractor PTO HP range</b>	40–90 hp	50–90 hp
<b>3-Point Hitch</b>	Cat 2	
<b>Side Frame Thickness</b>	7 gauge	.25"
<b>Cut Capacity</b>	2"	
<b>Cut Height</b>	1.5" – 12"	
<b>Cutting Swath</b>	5'	6'
<b>Inside Cutting Swath</b>	63"	
<b>Outside Swath</b>	123"	135"
<b>Transport width, mower up to 75 degrees</b>	108"	130.5"
<b>Mower Gauge Wheels</b>	(2) 4" x 14"	
<b>Optional Tailwheel</b>	5" x 15.5"	
<b>Blade Tip Speed</b>	11,500 fpm	10,100 fpm
<b>Shipping Weight</b>	1,351 lbs	1,534 lbs
<b>Minimum Tractor Weight</b>	4,000 lbs	5,000 lbs

**POWER TEAM** **Got ideas?**  
 Join our customer panel at [woodsequipment.com/power](http://woodsequipment.com/power).  
**You have the power...**



**WOODS®** | A Blount International Brand  
 2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 [woodsequipment.com](http://woodsequipment.com)



Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2014 Woods Equipment Company. All rights reserved. WOODS and Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.