



# X-ONE

AVAILABLE DECK SIZES

Engine	Deck Sizes
27HP* - Kawasaki® FX850	60"RD, 52", 60", 72"



# X-ONE


**Fabricated Frame for Durability**  
1.5" x 3.0" steel frame making it tough and durable.



**VX™ Deck**  
Fabricated 7 ga. steel engineered for extreme vacuum to deliver an excellent after cut appearance.

**Rubber Floor Mat**  
Helps provide operator comfort.

**Foot Operated Deck Lift**  
Easily adjust the deck height between 1" - 5.5" with your foot.

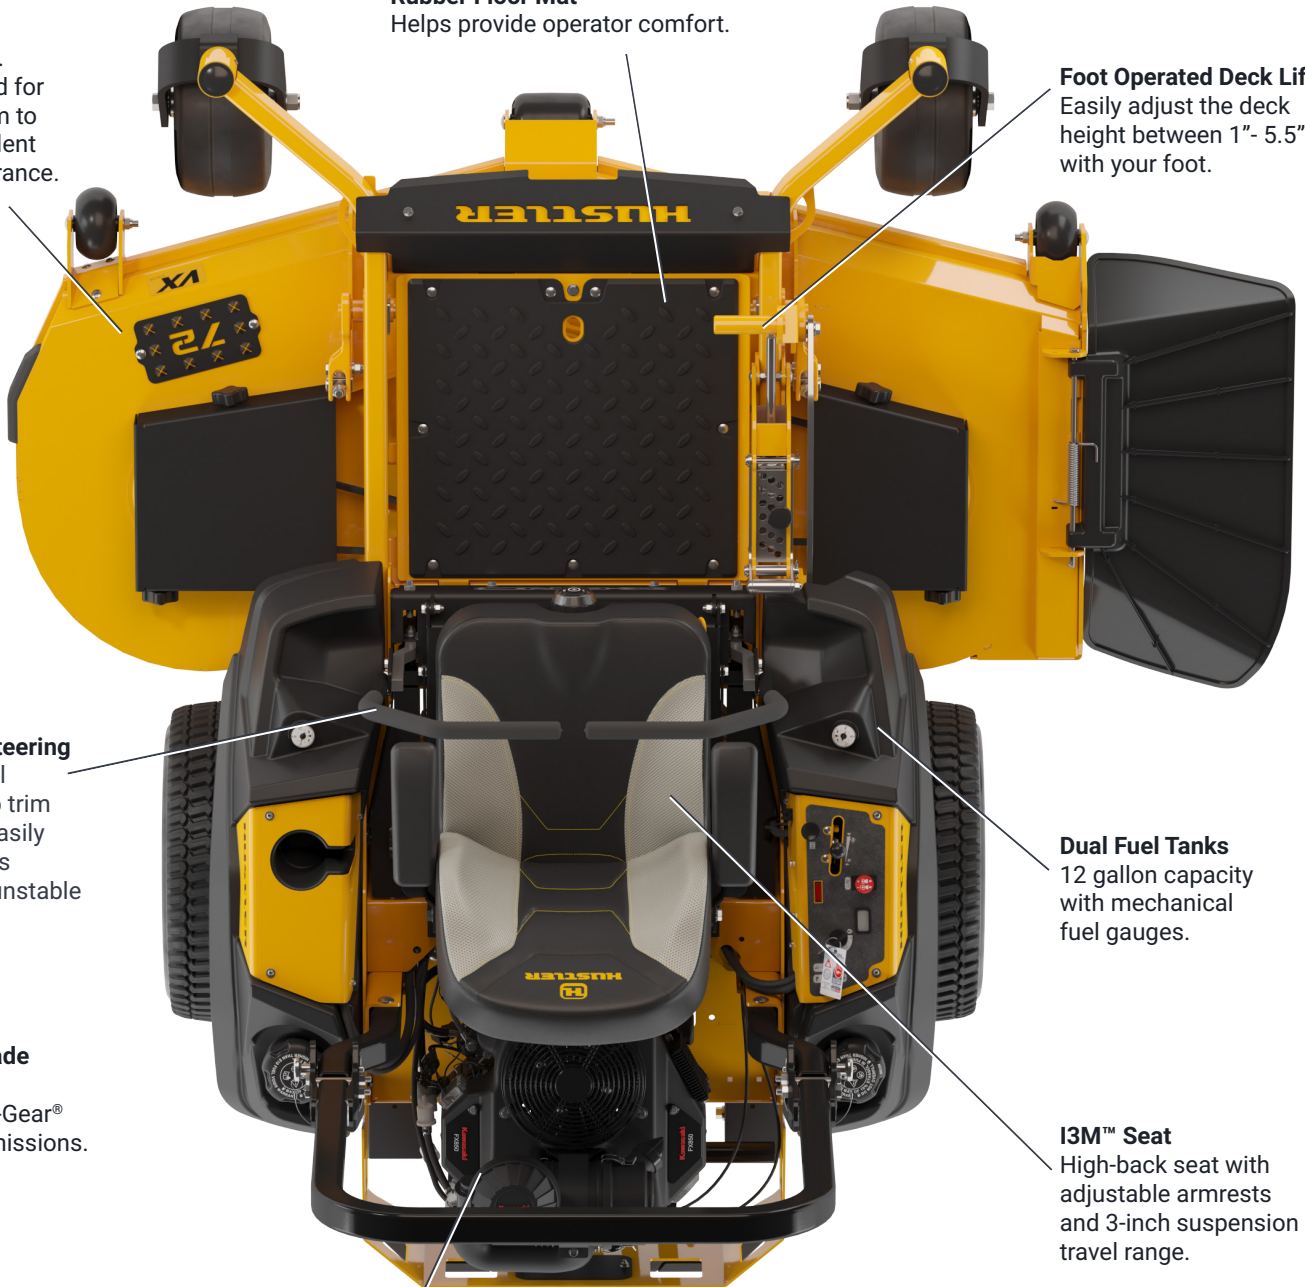

**SmoothTrak™ Steering**  
Precision control designed to help trim and maneuver easily around obstacles without feeling unstable or jerky.

**Commercial-grade Torque**  
Driven by Hydro-Gear® ZT-4400® transmissions.

**Dual Fuel Tanks**  
12 gallon capacity with mechanical fuel gauges.

**I3M™ Seat**  
High-back seat with adjustable armrests and 3-inch suspension travel range.

**Commercial-Grade Engines**  
Kawasaki® FX, Kohler® Command Pro® and Vanguard® Engine options backed by 3 year limited warranties.

LIMITED WARRANTY

**5** YEAR | **1200** HOUR

FIRST 2 YEARS NO HOUR LIMIT

# MORE FEATURES



Dual USB Port



Fabricated Step Tread



7 ga. Engine Guard

## VX™ Deck Technology

Designed to draw the grass into the mower blades resulting in a crisp and clean after cut appearance.

- Made with 7 ga. steel and with 7 ga. wrappers.
- Front edge protected by 11 ga. Formed channel with rolled edge.
- Ductile cast iron spindles with steel shaft and sealed ball bearings.
- Reinforced 7 ga. stamped disc spindle mounts.



## ACCESSORIES

(Each sold separately)

- ▶ Semi pneumatic front tires
- ▶ Steering lever extension kit
- ▶ Deck rear anti-scalp wheels
- ▶ 3-bag grass catcher (12 bushels)
- ▶ BacVac bagger (10 bushels)
- ▶ Mesh side bagger (3 bushels)
- ▶ Side Fabric bagger (3.5 bushels)
- ▶ Metal side bagger (3.5 bushels)
- ▶ Side Aluminum bagger (3.5 bushels)
- ▶ Flex Forks®
- ▶ Mulch kit
- ▶ Light kit
- ▶ Stripe kit
- ▶ Electric deck lift
- ▶ Hitch kit
- ▶ Michelin® X® Tweel® Turf
- ▶ Michelin® X® Tweel® Caster



## X-ONE®

Deck	52"	60"	72"	60" RD
<b>MSRP</b>	\$16,999	\$17,499	\$17,999	\$18,499
<b>Contractor Pricing</b>	\$13,599	\$13,999	\$14,399	\$14,799
<b>ENGINE</b>				
Manufacturer	Kawasaki® FX series			
HP	60"RD, 52", 60", 72": 27HP* - Kawasaki® FX850 (Per SAE J1995)			
Displacement	FX850, FX850 EFI: 852cc • Command Pro®: 725cc • Vanguard®: 810cc			
Cooling	Air cooled			
Air Cleaner	Canister style			
Engine Warranty	3 year limited			
<b>DRIVE SYSTEM</b>				
Type	Dual hydrostatic			
Transmission	Hydro-Gear® ZT-4400®			
Hydraulic Cooling	Transmission mounted fans			
Speed	Up to 12 mph			
Parking Brakes	Integrated with steering levers			
<b>DECKS</b>				
Cutting Width	Side discharge: 52", 60", 72" • Rear-discharge: 54", 60"			
Cutting Heights	1" - 5.5"			
Deck Lift	Foot operated			
Depth	5.5"			
Blades	3			
Blade Length	52" deck: 17.86" • 54" RD deck: 18.50" 60", 60 RD deck: 20.50" • 72" deck: 23.86"			
Blade Tip Speed	52": 17,700 • 54"RD: 18,300 • 60", 60" RD: 18,800 • 72": 18,500			
Spindles	Ductile cast iron with steel shaft and sealed ball bearings			
Drive	Electric PTO clutch			
Construction	Fabricated 7 ga. with 7ga. wrappers			
Spindle Mounts	Reinforced 7 ga. stamped disc			
Impact/Trim Areas	Front of deck: 11 ga. formed channel with rolled edge			
<b>CONSTRUCTION</b>				
Frame	1.5" x 3" steel tubing			
Front Axle	Fabricated with tapered roller bearings			
Front Caster Wheels	Tapered wheel bearings and debris cap			
Front Caster Forks	Fabricated 1/2" steel			
<b>GENERAL</b>				
Seat	I3M™ suspension seat			
Fuel Capacity	Dual fuel tank w/ 12 gallon capacity			
Cupholder	Yes			
Front Tire	13 x 6.5 - 6			
Drive Tire	52", 54" RD: 24 x 9.5 - 12 • 60", 60"RD, 72": 24 x 12 - 12			
<b>DIMENSIONS</b>				
Weight	52": 1285 lbs • 54" RD: 1320 lbs • 60": 1290-1395 lbs 60"(Kohler®): 1290 lbs • 60"RD: 1350 lbs • 72": 1405-1425 lbs			
Height	49" • 72.5 w/ ROPs			
Length	52": 85.5" • 54"RD: 86.9" • 60": 84.4" • 60"RD: 86.5" • 72": 86.9"			
Width w/Chute Up	52": 55.8" • 54"RD: 55.8" • 60": 61.6" • 60"RD: 61.7" • 72": 73.6"			
Tire Width	52", 54"RD: 51" • 60", 60"RD, 72": 54.5"			
Trim Side	52": 0.9" • 54"RD: 2.0" • 60": 5.1" • 60"RD: 3.2" • 72": 12"			
<b>PRODUCTIVITY**</b>				
Acres Per Hour	52": 5.52 • 54"RD: 5.73 • 60", 60"RD: 6.36 • 72": 7.64			

Specifications are subject to change without notice.

\* As rated by the engine manufacturer.

\*\* Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.

Kawasaki is a registered trademark owned by KAWASAKI JUKOGYO KABUSHIKI KAISHA. Kohler and Command Pro are registered trademarks owned by Kohler Co. Vanguard is a registered trademark owned by Briggs & Stratton Corporation. Hydro-Gear and ZT-4400 are registered trademarks owned by Hydro-Gear Limited Partnership. Michelin, X and Tweel are registered trademarks owned by COMPAGNIE GÉNÉRALE DES ÉTABLISSEMENTS MICHELIN.