



SUPER Z

— AND —

HYPERDRIVE



SUPER Z

AVAILABLE DECK SIZES

Engine	Deck Sizes
35HP* - Kawasaki® FX1000	60", 60"RD & 72"



HYPERDRIVE

AVAILABLE DECK SIZES

Engine	Deck Sizes
38.5HP* - Kawasaki® FX1000 EFI	60", 60"RD, 66", 72" & 72"RD
40HP* - Vanguard® Big Block™ EFI w/ Oil Guard	60" & 72"

SUPER Z

VX4® Deck

Fabricated 7 ga. steel engineered for extreme vacuum to deliver an excellent after cut appearance.

Rubber Floor Mat

Helps provide operator comfort.

Foot Operated Deck Lift

Easily adjust the deck height between 1" - 5.5" with your foot.

Easy to Service

Flip-up seat pan, removable floor pan, vented pulley covers.

SmoothTrak™ Steering


Precision control designed to help trim and maneuver easily around obstacles without feeling unstable or jerky.

I3M™ Suspension Seat

High-back seat with adjustable armrests and 3-inch suspension travel range.

Commercial-grade Torque

Hydro-Gear® 21 cc PY pumps and Parker® TG wheel motors.

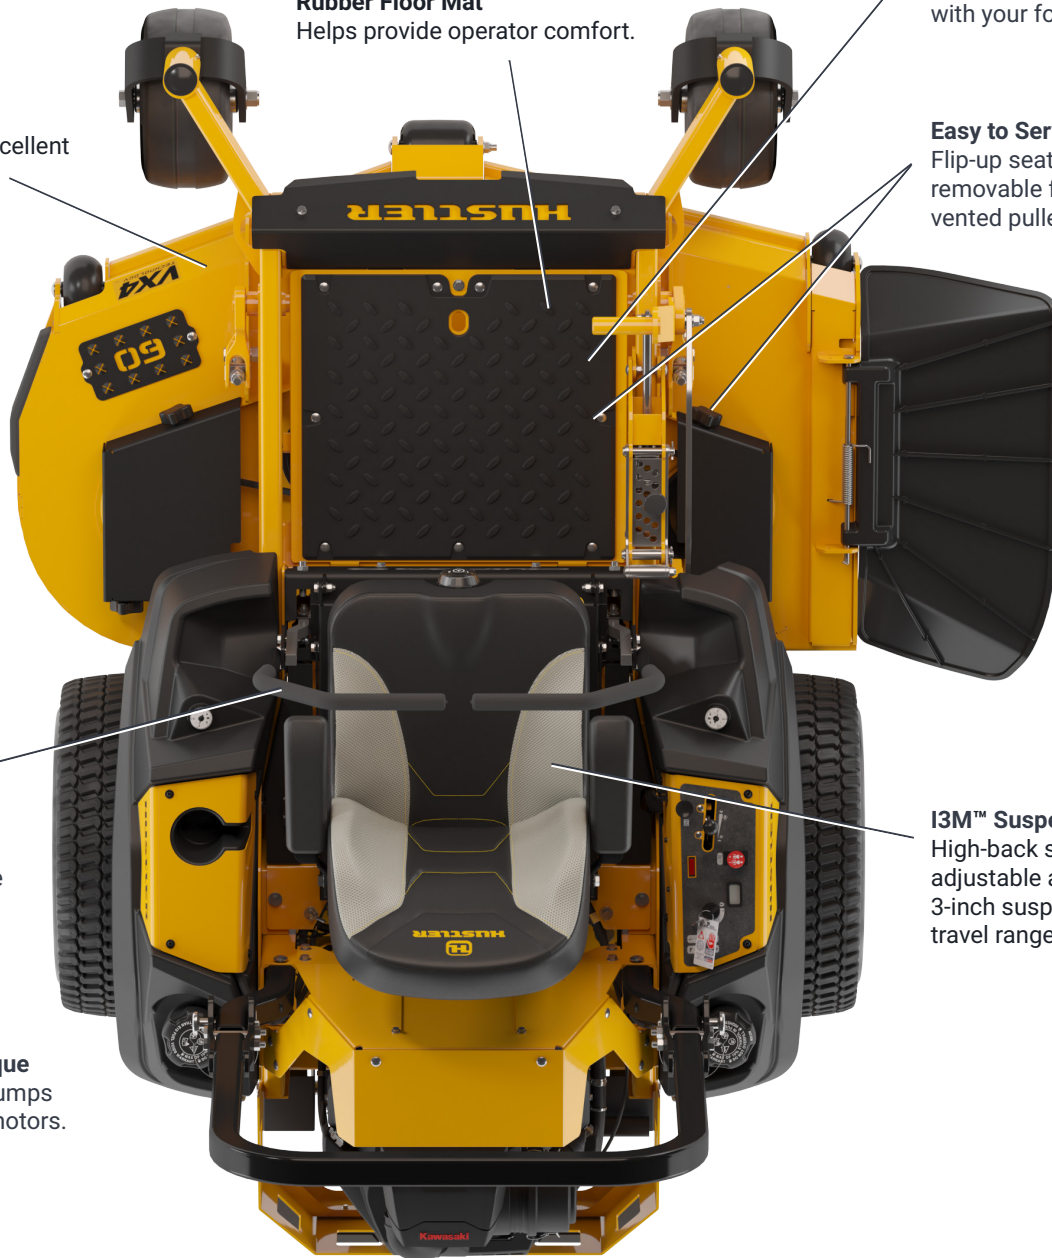

LIMITED WARRANTY
5 YEAR | **1200** HOUR
FIRST 2 YEARS NO HOUR LIMIT



7 ga. Engine Guard



Dual USB Port



UPGRADES FOUND ON THE HYPERDRIVE®

HYPERDRIVE

- ✓ HyperDrive® Hydro System
- ✓ Danfoss® DDC-20 Pumps
- ✓ Up to 16 mph (compared to 14 mph)



LIMITED WARRANTY
5 YEAR | **1200** HOUR
 FIRST 2 YEARS NO HOUR LIMIT

ACCESSORIES

(Each sold separately)

- ▶ Steering extension kit
- ▶ Electric deck lift
- ▶ Rear hitch kit
- ▶ Anti-scalp deck rear wheels
- ▶ BacVac bagger
- ▶ Semi pneumatic front tire
- ▶ 3-bag powered bagger (12 bushels)
- ▶ Flex Forks®
- ▶ Mulch kit
- ▶ Light kit
- ▶ Sand kit
- ▶ Stripe kit
- ▶ Beacon kit
- ▶ Flasher kit
- ▶ Michelin® X® Tweel® Turf
- ▶ Michelin® X® Tweel® Turf Caster

HYPERDRIVE® SYSTEM


Reducing the temperature of the oil in your wheel motors is a key to extending the life of your hydraulic system. Hustler's exclusive HyperDrive® system helps do just that with temperature regulation and heavy-duty components designed to keep your mower at peak performance.



9" Fan & High-Capacity Oil Cooler with Hot Oil Shuttle



Large Oil Reservoir



Parker® TG280 Wheel Motors



Industrial-Grade Slipper Piston Pumps

INDUSTRY'S BEST WARRANTY

5 YEAR | **3000** HOUR
 LIMITED
PUMPS AND MOTORS

SUPER Z®

Deck	60"	60" RD	72"
MSRP	\$21,199	\$22,399	\$22,399
Contractor Pricing	\$16,959	\$17,919	\$17,919
ENGINE			
Manufacturer	Kawasaki® FX series		
HP	60", 60"RD & 72" deck: 35HP* - FX1000 (Per SAE J1995)		
Displacement	FX850: 852cc • FX1000: 999cc • FX1000 EFI: 999cc • Vanguard®: 993cc		
Cooling	Air cooled		
Air Cleaner	Canister style		
Engine Warranty	3 year limited		
DRIVE SYSTEM			
Type	Dual hydrostatic		
Pumps	Hydro-Gear® 21cc PY		
Wheel Motors	Parker® TG		
Hydraulic Lines	Stainless Parker® Seal-Loc Technology		
Reservoir Capacity	3 gallons		
Speed	Up to 14 mph		
Parking Brakes	Integrated with steering levers		
DECKS			
Cutting Width	Side discharge: 60", 72" • Rear-discharge: 60"		
Cutting Heights	1" - 5.5"		
Deck Lift	Foot operated		
Depth	5.5"		
Blades	3		
Blade Length	54" deck: 18.50" • 60" deck: 20.50" 66" deck: 22.50" • 72" deck: 24.50"		
Blade Tip Speed	54": 18,300 • 60": 18,600 • 66": 18,200 • 72": 18,500		
Spindles	Ductile cast iron with steel shaft and sealed ball bearings		
Drive	Electric PTO clutch		
Construction	Fabricated 7 ga.		
Spindle Mounts	Reinforced 7 ga. stamped disc		
Impact/Trim Areas	Front of deck: 11 ga. formed bump bar Side of deck: 1.5" x .375" steel bar		
CONSTRUCTION			
Frame	1.5" x 3" steel tubing		
Front Axle	Fabricated with tapered roller bearings		
Front Caster Wheels	Tapered wheel bearings and debris cap		
Front Caster Forks	Fabricated 1/2" steel		
GENERAL			
Seat	I3M™ suspension seat		
Fuel Capacity	Dual Fuel Tank w/ 12 Gallon total capacity		
Cupholder	Yes		
Front Tire	13 x 6.5 - 6		
Drive Tire	54": 26 x 9.5 - 12 • 60", 66", 72": 26 x 12 - 12		
DIMENSIONS			
Weight	54": 1522 lbs • 60": 1553-1637 lbs • 60" RD: 1664 lbs 66": 1631 lbs • 72": 1641-1659 lbs • 72"RD: 1731 lbs		
Height	47.8" • 73.5 w/ ROPs		
Length	54", 60": 88" • 60"RD, 66": 90" • 72", 72"RD: 92"		
Width w/Chute Up	54": 60" • 60": 66" • 60" RD: 64" • 66": 72" • 72": 78" • 72"RD: 73.3"		
Tire Width	54": 53" • 60", 60"RD: 58" • 66", 72"RD, 72": 60"		
Trim Side	54": 2.4" • 60": 3.4" • 60"RD: 3.1" • 66": 4.9" • 72": 8.9" • 72" RD: 6.6"		
PRODUCTIVITY**			
Acres Per Hour	54": 6.11 • 60": 6.78 • 66": 7.46 • 72": 8.14		

Specifications are subject to change without notice.

* As rated by the engine manufacturer.

** Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.

Kawasaki is a registered trademark owned by KAWASAKI JUKOGYO KABUSHIKI KAISHA. Vanguard is a registered trademark owned by Briggs & Stratton Corporation.

Parker is a registered trademark owned by Parker Intangibles LLC. Danfoss is a registered trademark owned by Danfoss A/S. Hydro-Gear is a registered trademark owned by Hydro-Gear Limited Partnership.

Michelin, X and Tweel are registered trademarks owned by COMPAGNIE GÉNÉRALE DES ÉTABLISSEMENTS MICHELIN.

HYPERDRIVE®							
Deck	60" KW	66" KW	72" KW	60" RD	72" RD	60" Vanguard®	72" Vanguard®
MSRP	\$24,699	\$24,899	\$24,999	\$25,299	\$25,599	\$25,999	\$26,399
Contractor Pricing	\$19,759	\$19,919	\$19,999	\$20,239	\$20,749	\$20,799	\$21,119
ENGINE							
Manufacturer	Vanguard® Big Block™, Kawasaki® FX series						
HP	60" & 72" deck: 40HP* - Big Block™ EFI w/ Oil Guard 60", 60"RD, 66", 72" & 72"RD deck: 38.5HP* - FX1000 EFI (Per SAE J1995)						
Displacement	Vanguard®: 993cc • Kawasaki: 999cc						
Cooling	Air cooled						
Air Cleaner	Canister style						
Engine Warranty	3 year limited						
DRIVE SYSTEM							
Type	Dual hydrostatic						
Pumps	Danfoss® DDC-20						
Wheel Motors	Parker® TG						
Hydraulic Lines	Stainless Parker® Seal-Loc Technology						
Reservoir Capacity	3 gallons						
Speed	Up to 16 mph						
Parking Brakes	Integrated with steering levers						
DECKS							
Cutting Width	Side discharge: 60", 66", 72" • Rear-discharge: 60", 72"						
Cutting Heights	1" - 5.5"						
Deck Lift	Foot operated						
Depth	5.5"						
Blades	3						
Blade Length	60" deck: 20.50" 66" deck: 22.50" • 72" deck: 24.50"						
Blade Tip Speed	60": 18,600 • 66": 18,200 • 72": 18,500 • 72"RD: 18,500						
Spindles	Ductile cast iron with steel shaft and sealed ball bearings						
Drive	Electric PTO clutch						
Construction	Fabricated 7 ga.						
Spindle Mounts	Reinforced 7 ga. stamped disc						
Impact/Trim Areas	Front of deck: 11 ga. formed bump bar Side of deck: 1.5" x .375" steel bar						
CONSTRUCTION							
Frame	1.5" x 3" steel tubing						
Front Axle	Fabricated with tapered roller bearings						
Front Caster Wheels	Tapered wheel bearings and debris cap						
Front Caster Forks	Fabricated 1/2" steel						
GENERAL							
Seat	I3M™ suspension seat						
Fuel Capacity	Dual Fuel Tank w/ 12 Gallon total capacity						
Cupholder	Yes						
Front Tire	13 x 6.5 - 6						
Drive Tire	60", 66", 72": 26 x 14 - 12 • 60" & 72" RD: 26 x 12 - 12						
DIMENSIONS							
Weight	60": 1619-1682 lbs • 60"RD: 1727 lbs 66": 1694 lbs • 72": 1686 - 1750 • 72"RD: 1794 lbs						
Height	47.8" • 73.5 w/ ROPs						
Length	60": 88" • 60"RD, 66": 90" • 72", 72"RD: 92"						
Width w/Chute Up	60": 66" • 60"RD: 64" • 66": 72" • 72": 78" • 72"RD: 73.3"						
Tire Width	60", 60"RD: 57" • 66", 72"RD, 72": 60"						
Trim Side	60": 3.4" • 60"RD: 3.1" • 66": 4.9" • 72": 8.9" • 72" RD: 6.6"						
PRODUCTIVITY**							
Acres Per Hour	60": 7.76 • 66": 8.54 • 72": 9.31						

Specifications are subject to change without notice.

* As rated by the engine manufacturer.

** Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.

Kawasaki is a registered trademark owned by KAWASAKI JUKOGYO KABUSHIKI KAISHA. Vanguard is a registered trademark owned by Briggs & Stratton Corporation.

Parker is a registered trademark owned by Parker Intangibles LLC. Danfoss is a registered trademark owned by Danfoss A/S. Hydro-Gear is a registered trademark owned by Hydro-Gear Limited Partnership.

Michelin, X and Tweel are registered trademarks owned by COMPAGNIE GÉNÉRALE DES ÉTABLISSEMENTS MICHELIN.