



SURFER PRO

AVAILABLE DECK SIZES

Engine	Deck Sizes
15HP* - Kawasaki® FS541	36", 48"



SURFER^{PRO}

Semi Pneumatic Front Tires
11" front tires

34" & 48" Decks
Fabricated steel decks for durability.


18" Drive Tires
Help provide stability and traction.

Small footprint
For gated backyards, trailering, and storage.

Kawasaki® FS541 Engine
15 HP*

Park Brake
Hand operated lever to set the park brake.

Cut Height Adjustment
Hand operated lever and pin to easily adjust deck/cutting height.

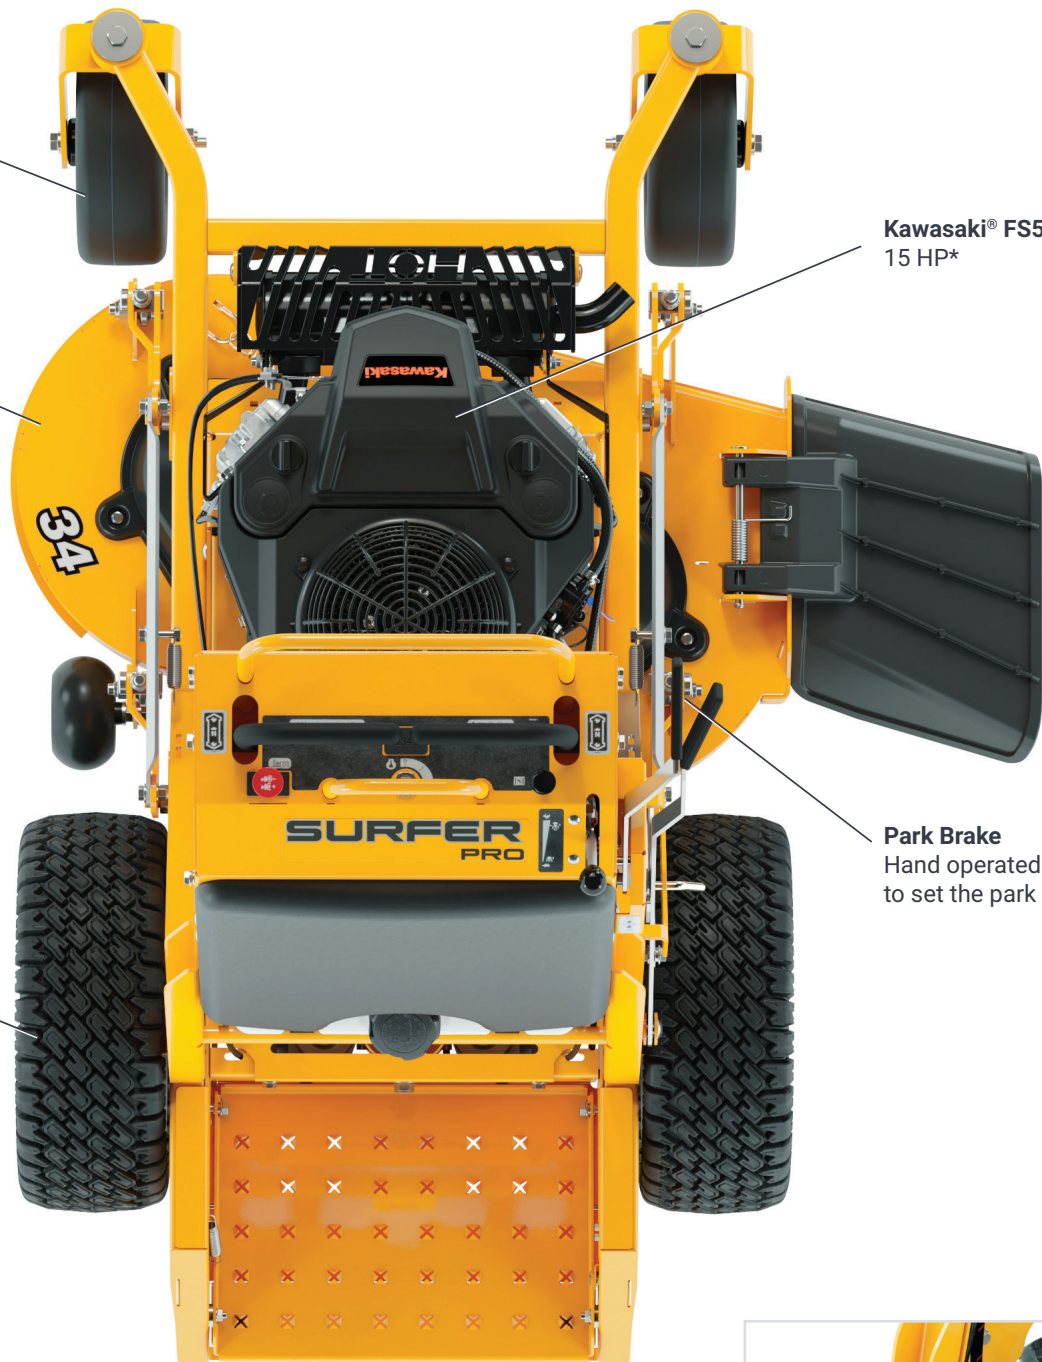



A STAND-ON MOWER FOR TIGHT SPACES

SURFER PRO

- ✔ **Kawasaki® Commercial FS V-Twin Engine**
- ✔ **Ideal for Commercial Contractors and Homeowners**
For tight spaces and fenced backyards with gates.
- ✔ **Fabricated Deck**
Heavy-duty construction.
- ✔ **Hydro-Gear® ZT-1800® Transmissions**
- ✔ **18" Rear Tires**
- ✔ **11" Semi Pneumatic Front Tires**
- ✔ **2 Gallon Fuel Capacity**
- ✔ **Up to 6 mph**



ACCESSORIES

(Each sold separately)

- ▶ Mulch kit
- ▶ Mesh side bagger (3 bushels)
- ▶ Light kit
- ▶ Stripe kit
- ▶ Weight Kit



SURFER PRO

Deck	34"	48"
MSRP	\$6,699	\$6,899
Contractor Pricing	\$5,359	\$5,519
ENGINE		
Manufacturer	Kawasaki® FS series	
HP	34"/48" deck: 15HP* - FS541 (Per SAE J1995)	
Displacement	603cc	
Cooling	Air cooled	
Air Cleaner	Oval canister, dual element	
Engine Warranty	3 year limited	
DRIVE SYSTEM		
Type	Dual hydrostatic	
Drive System	Hydro-Gear® ZT-1800®	
Speed	Up to 6 mph	
Parking Brakes	Hand operated	
DECKS		
Cutting Width	Side discharge: 34", 48"	
Cutting Heights	2" - 4.75"	
Deck Lift	Hand operated.	
Depth	4.10"	
Blades	34" deck: 2 • 48" deck: 3	
Blade Length	34" deck: 16.75" • 48" deck: 16.50"	
Blade Tip Speed	34" deck: 18,900 • 48" deck: 18,600	
Spindles	Aluminum w/ 3/4" shaft and triple protection sealed ball bearings	
Drive	Electric PTO clutch	
Construction	34" deck: Fabricated 7 ga. • 48" deck: Fabricated 11 ga.	
Spindle Mounts	14 ga.	
Impact/Trim Areas	3/8" x 1" steel bar	
CONSTRUCTION		
Frame	1.5" x 1.5" steel tubing	
Engine Plate	7 ga.	
Operator Platform	Suspension	
Front Axle	Fabricated w/ sealed ball bearings	
Front Caster Wheels	Commercial duty steel roller bearings	
Front Caster Forks	Fabricated 1/4" steel	
Operator Pad	Vinyl pad	
GENERAL		
Fuel Capacity	2.0 gallons	
Front Tire	11 x 4 semi pneumatic	
Drive Tire	34" deck: 18 x 6.5 - 8 • 48" deck: 18 x 8.5 - 8	
DIMENSIONS		
Weight	34" deck: 470 lbs • 48" deck: 490 lbs	
Height	48.5"	
Length	58.9"	
Width w/Chute Up	34" deck: 35" • 48" deck: 48.3"	
Tire Width	34" deck: 6.5" • 48" deck: 9"	
Trim Side	34" deck: 0.7" • 48" deck: 5.9"	
PRODUCTIVITY**		
Acres Per Hour	34" deck: 1.65 • 48" deck: 2.33	

Specifications are subject to change without notice.

* As rated by the engine manufacturer.

** Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.

Kawasaki is a registered trademark owned by KAWASAKI JUKOGYO KABUSHIKI KAISHA. Vanguard is a registered trademark owned by Briggs & Stratton Corporation.

Hydro-Gear is a registered trademark owned by Hydro-Gear Limited Partnership.